CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp5470

SPECfp2000 = 522

SPECfp_base2000 = 462

SPEC license #: 3 | Tested by: HP Richardson | Test date: Oct-2001 | Hardware Avail: Nov-2001 | Software Avail: Sep-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	482	332	285	562
171.swim	3100	394	788	394	788
172.mgrid	1800	385	468	385	468
173.applu	2100	356	590	356	590
177.mesa	1400	246	569	245	570
178.galgel	2900	212	1367	212	1367
179.art	2600	524	496	324	802
183.equake	1300	549	237	376	346
187.facerec	1900	573	332	552	344
188.ammp	2200	463	475	408	539
189.lucas	2000	671	298	649	308
191.fma3d	2100	775	271	763	275
200.sixtrack	1100	271	406	242	455
301.apsi	2600	442	589	442	589

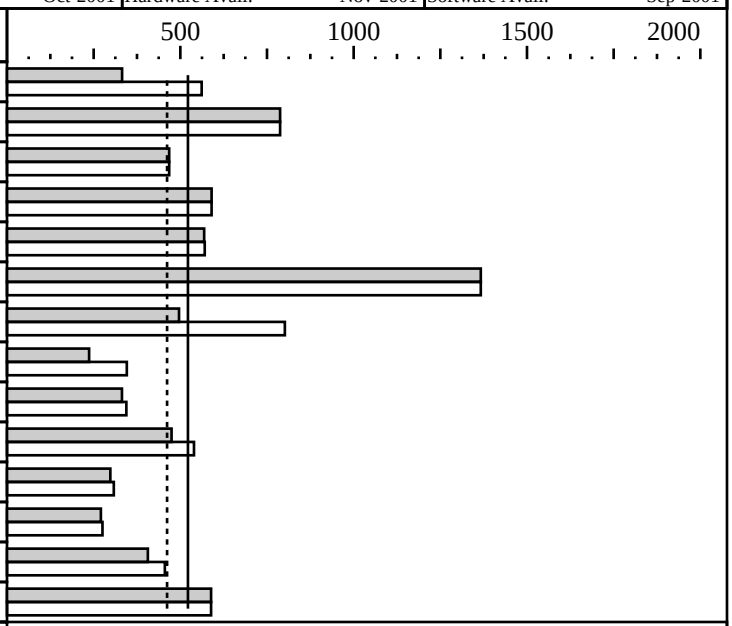

Hardware

CPU:	PA-8700
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 4
Parallel:	No
Primary Cache:	0.75MBI + 1.5MBD on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	4GB
Disk Subsystem:	18GB SCSI disk
Other Hardware:	None

Software

Operating System:	B.11.11.0109.6 HP-UX 11i, September 2001 HWE patches
Compiler:	HP ANSI C 11.11.03 Fortran90 11.11.40 PHSS_24207 libm patch
File System:	HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  178.galgel:  +source=fixed

Base Flags:
  f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
  C:   +I/+P +O4 +Odataprefetch -Wl,-a,archive

Peak Flags:

  ONESTEP=true for 168.wupwise, 187.facerec, 200.sixtrack

  168.wupwise: +cat +O3 +Odataprefetch +Onofltacc
               -Wl,+FPD -Wl,-a,archive
  171.swim:    basepeak=true
  172.mgrid:   basepeak=true
  173.applu:   basepeak=true
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:    +I/+P +Oall +Odataprefetch +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    178.galgel:  basepeak=true
    179.art:     +I/+P +Oall +Onodataprefetch +Onofltacc
                 +Optrs_strongly_typed +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    183.equake:  +O4 +Olibcalls +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    187.facerec: +cat +O3 +Ofastaccess
                 -Wl,+FPD -Wl,-a,archive
    188.ammp:    +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    189.lucas:   +O3 +Onoinline
                 -Wl,+FPD -Wl,-a,archive
    191.fma3d:   +O3 +Onolimit
                 -Wl,+FPD -Wl,-a,archive
    200.sixtrack: +cat +O3 +Onolibcalls +Onolimit +Onoinline
                  +Onodataprefetch
                  -Wl,+FPD -Wl,-a,archive
    301.apsi:     basepeak=true

  System tunables:

     vps_pagesize 4096, vps_ceiling 16384
     dbc_min_pct 20, dbc_max_pct 20
     maxdsiz 2063835136, maxssiz 401604608
     Unused processors disabled at boot
```