CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp7400

SPECfp2000 = 489

SPECfp_base2000 = 430

SPEC license #: 3 | Tested by: HP Richardson | Test date: Oct-2001 | Hardware Avail: Sep-2001 | Software Avail: Sep-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	529	302	314	510
171.swim	3100	393	789	393	789
172.mgrid	1800	396	454	396	454
173.applu	2100	363	578	363	578
177.mesa	1400	280	500	279	503
178.galgel	2900	229	1266	229	1266
179.art	2600	575	452	337	773
183.equake	1300	564	230	384	338
187.facerec	1900	630	302	611	311
188.ammp	2200	510	431	445	494
189.lucas	2000	691	290	666	300
191.fma3d	2100	829	253	815	258
200.sixtrack	1100	310	355	278	395
301.apsi	2600	485	536	485	536

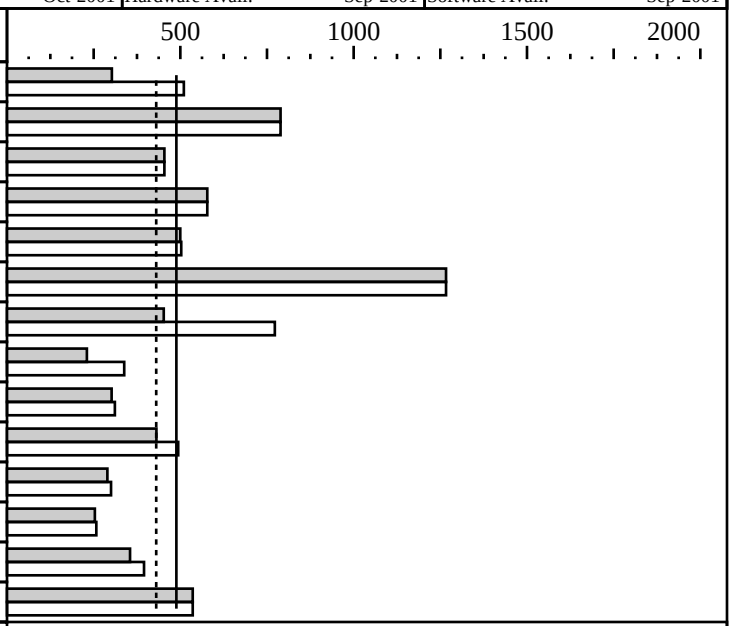

Hardware

CPU:	PA-8700
CPU MHz:	650
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1 to 8
Parallel:	No
Primary Cache:	0.75MBI + 1.5MBD on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	2x9GB SCSI disk
Other Hardware:	None

Software

Operating System:	B.11.11.0109.6 HP-UX 11i, September 2001 HWE patches
Compiler:	HP ANSI C 11.11.03 aC++ C.03.30.02 Fortran90 11.11.40 PHSS_24207 libm patch
File System:	HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  178.galgel:  +source=fixed

Base Flags:
  f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
  C:   +I/+P +O4 +Odataprefetch -Wl,-a,archive

Peak Flags:

  ONESTEP=true for 168.wupwise, 187.facerec, 200.sixtrack

  168.wupwise: +cat +O3 +Odataprefetch +Onofltacc
               -Wl,+FPD -Wl,-a,archive
  171.swim:    basepeak=true
  172.mgrid:   basepeak=true
  173.applu:   basepeak=true
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    177.mesa:    +I/+P +Oall +Odataprefetch +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    178.galgel:  basepeak=true
    179.art:     +I/+P +Oall +Onodataprefetch +Onofltacc
                 +Optrs_strongly_typed +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    183.equake:  +O4 +Olibcalls +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    187.facerec: +cat +O3 +Ofastaccess
                 -Wl,+FPD -Wl,-a,archive
    188.ammp:    +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
                 +Opromote_indirect_calls
                 -Wl,+FPD -Wl,-a,archive
    189.lucas:   +O3 +Onoinline
                 -Wl,+FPD -Wl,-a,archive
    191.fma3d:   +O3 +Onolimit
                 -Wl,+FPD -Wl,-a,archive
    200.sixtrack: +cat +O3 +Onolibcalls +Onolimit +Onoinline
                  +Onodataprefetch
                 -Wl,+FPD -Wl,-a,archive
    301.apsi:    basepeak=true

  System tunables:

     vps_pagesize 4096, vps_ceiling 16384
     dbc_min_pct 20, dbc_max_pct 20
     maxdsiz 2063835136, maxssiz 401604608
     Unused processors disabled at boot
```