CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
HP 9000 rp4440-8 (1000MHz PA-8800)

SPECint_rate2000 = 18.6

SPECint_rate_base2000 = 17.8

SPEC license #: 3 | Tested by: HP Richardson | Test date: Jan-2004 | Hardware Avail: Feb-2004 | Software Avail: Feb-2004

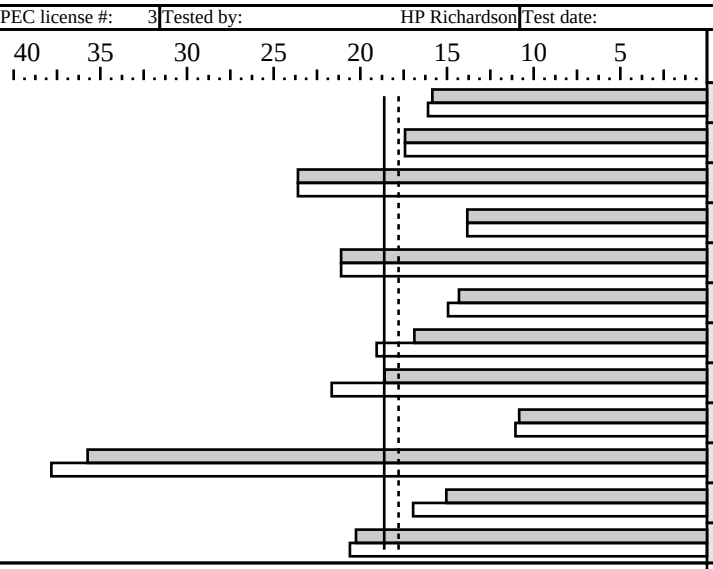

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	205	15.8	2	202	16.1
175.vpr	2	186	17.4	2	186	17.4
176.gcc	2	108	23.6	2	108	23.6
181.mcf	2	302	13.8	2	302	13.8
186.crafty	2	110	21.1	2	110	21.1
197.parser	2	292	14.3	2	280	14.9
252.eon	2	179	16.9	2	158	19.1
253.perlbmk	2	225	18.6	2	193	21.7
254.gap	2	236	10.8	2	231	11.0
255.vortex	2	123	35.7	2	117	37.8
256.bzip2	2	231	15.0	2	205	17.0
300.twolf	2	344	20.3	2	338	20.6

Hardware

CPU:	PA-8800
CPU MHz:	1000
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	2,4,6,8 (order by # cores)
Parallel:	no
Primary Cache:	0.75MBI + 0.75MBD (on chip) per core
Secondary Cache:	32MB (off chip) shared by 2 cores
L3 Cache:	N/A
Other Cache:	N/A
Memory:	64GB (32 * 2GB DIMMs)
Disk Subsystem:	1x73GB 15K rpm SCSI
Other Hardware:	N/A

Software

Operating System:	HPUX11i-TCOE B.11.11.0312
Compiler:	HP aC++ Compiler A.03.52 HP C/ANSI C B.11.11.08
File System:	VxFS
System State:	Multi-user

Notes/Tuning Information

```
Portability flags:
  176.gcc: -DHOST_WORDS_BIG_ENDIAN
  186.crafty: -DHP
  252.eon: -DFMAX_IS_DOUBLE
  253.perlbmk: -DSPEC_CPU2000_HP
  254.gap: -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
           -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Baseline compile flags:
  C      : +I/+P +Oall +Ostatic_prediction -Wl,-a,archive
  C++    : +I/+P +Oall +Ostatic_prediction -Wl,-a,archive

Peak compile flags:
     164.gzip: +I/+P +Oall +Optrs_strongly_typed +Oinline_budget=800
               -Wl,-a,archive +Ostatic_prediction
      175.vpr: basepeak=true
      176.gcc: basepeak=true
      181.mcf: basepeak=true
   186.crafty: basepeak=true
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
     197.parser: +I/+P +Oall +Odataprefetch +ESfic +Oinline_budget=400
                 +Owhole_program_mode -Wl,-a,archive +Ostatic_prediction
        252.eon: +I/+P +noeh +O4 +Optrs_strongly_typed +Olibcalls +Oentrysched
                 +A +ESfic -Wl,-a,archive +Ostatic_prediction
    253.perlbmk: +I/+P +Oall +ESlit +ESfic +Optrs_strongly_typed
                 +Opromote_indirect_calls -Wl,-a,archive +Ostatic_prediction
                 linked with /opt/langtools/lib/fastmem.o
        254.gap: +I/+P +Oall +ESlit +ESfic +Optrs_strongly_typed
                 +Opromote_indirect_calls -Wl,-a,archive +Ostatic_prediction
     255.vortex: +I/+P +Oall +Oinline_budget=800 +Optrs_strongly_typed
                 -Wl,-a,archive +Ostatic_prediction
      256.bzip2: +I/+P +Oall +Odataprefetch +Optrs_strongly_typed +Owhole_program_mode
                +Onoptrs_to_globals +Oinline_budget=80 -Wl,-a,archive +Ostatic_prediction
     300.twolf: +I/+P +Oall +Optrs_strongly_typed -Wl,-a,archive +Ostatic_prediction

Kernel Tunables:
  dbc_max_pct=20
  dbc_min_pct=20
  maxdsiz=3221225472
  maxssiz=268435456
  maxdsiz_64bit=274877906944
  maxssiz_64bit=1073741824
  vps_pagesize=4096
  vps_ceiling=16384

Other notes:

  The system under test had the HP-UX 11i v1 December 2003
  Technical Computing Operating Environment (version 11.11.0312)
  and DART63 (December 2003) compilers installed, with the
  following patches applied:

  GOLDAPPS11i Gold Applications Patches for HP-UX 11i v1, December 2003
  GOLDBASE11i Gold Base Patches for HP-UX 11i v1, December 2003
  HWEnable11i Hardware Enablement Patches for HP-UX 11i v1, December 2003
  HWETEST1111 Hardware Enablement Patches for PA-8800 (prerelease)
  PHSS_29483  aC++ compiler cumulative patch (A.03.52)
  PHSS_30002  Fortran90 cumulative patch (B.11.01.74)

  BCH shell utility command 'co cpu' (configure cpu)
     used to deconfigure processors if necessary.
```