CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated

Altos G5350 (2.2GHz, Dual-Core AMD Opteron (TM) 275 , 2x1MB L2)

SPECfp_rate2000 = 31.1

SPECfp_rate_base2000 = 28.6

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: Oct-2005 | Hardware Avail: Jul-2005 | Software Avail: Jun-2005

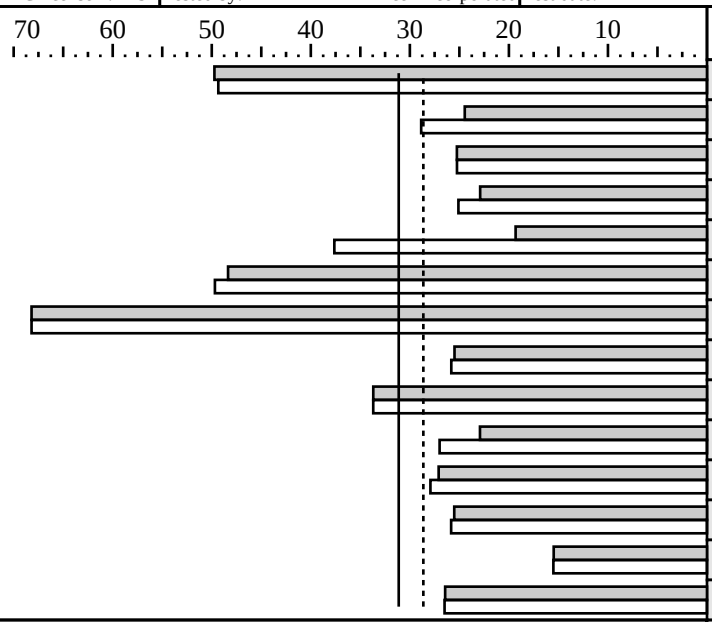

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	74.6	49.7	2	75.2	49.3
171.swim	2	294	24.5	2	249	28.9
172.mgrid	2	165	25.3	2	165	25.2
173.applu	2	213	22.9	2	194	25.1
177.mesa	2	168	19.3	2	86.3	37.6
178.galgel	2	139	48.4	2	135	49.7
179.art	2	88.5	68.2	2	88.5	68.2
183.equake	2	118	25.5	2	117	25.8
187.facerec	2	131	33.7	2	131	33.7
188.ammp	2	223	22.9	2	189	27.0
189.lucas	2	171	27.1	2	166	27.9
191.fma3d	2	191	25.5	2	189	25.8
200.sixtrack	2	165	15.5	2	165	15.5
301.apsi	2	228	26.4	2	228	26.5

Hardware

CPU:	AMD Opteron (TM) 275
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip, per core
Secondary Cache:	1024KB (I+D) on chip, per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 1024MB, DDR400 CL3 ECC
Disk Subsystem:	1 x 36GB 10000RPM U320 SCSI HDD
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition (Build 3790)
Compiler:	Intel C++ 9.0 build 20050430Z for IA32 Intel Fortran 9.0 build 20050722Z for IA32 PGI Fortran compiler 6.0-5 PGI C compiler 6.0-5 ACML Version 2.5.3 (bundled with PGI 6.0-5)
File System:	NTFS
System State:	default

Notes/Tuning Information

```
+FDO:
 icl, ifort  : PASS1=-Qprof_gen  PASS2=-Qprof_use
 pgf90       : PASS1=-Mpfi       PASS2=-Mpfo
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran 90 compiler.
pgcc is the PGI C compiler.
ONESTEP is set to 1 for every compile with the PGI compilers.
Portability:
178.galgel:                 -Mfixed
Baseline: C      :  pgcc    -fastsse -Mipa=fast,inline
Baseline: Fortran:  pgf90   -fastsse -Mipa=fast,inline +FDO
Peak tuning:
168.wupwise:        pgf90   -fastsse -Mipa=fast,inline -Mnovect
171.swim:           ifort   -Qipo  -O3  -QaxN -QxW -Qunroll0 +FDO
172.mgrid:          pgf90   -fastsse -Mipa=fast,inline
173.applu:          ifort   -Qipo  -O3 -QaxN -QxW -auto +FDO
177.mesa:           icl     -Qipo -arch:SSE2 -Qunroll1 -Qansi_alias +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                    -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
178.galgel:         pgf90   -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90
                            -Munix -lacml
179.art:            pgcc     basepeak=yes
183.equake:         icl     -fast -arch:SSE2 -QaxW +FDO
187.facerec:        pgf90   -fastsse -Mipa=fast,inline +FDO
188.ammp:           icl     -Oa   -arch:SSE2  -Zp4 -Qansi_alias
189.lucas:          ifort   -Qipo -QxW -Qunroll1
191.fma3d:          pgf90   -Mipa=fast,inline -fastsse -Mnovect +FDO
200.sixtrack:       pgf90   -fastsse -Mipa=fast,inline
301.apsi:           pgf90   -fastsse -Mipa=fast,inline
```