CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER1500 (2160MHz)

SPECint_rate2000 = 537

SPECint_rate_base2000 = 482

SPEC license #: 19 | Tested by: Fujitsu Limited | Test date: Feb-2006 | Hardware Avail: Jun-2005 | Software Avail: Nov-2005

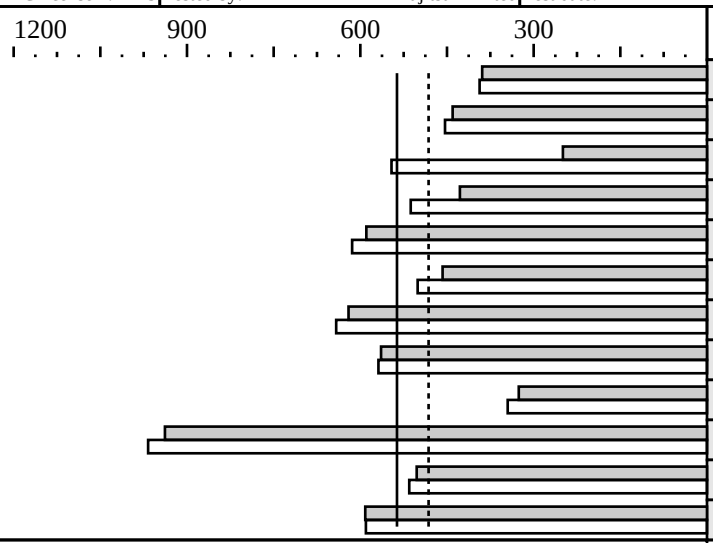

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	32	134	389	32	132	394
175.vpr	32	118	440	32	115	453
176.gcc	32	164	249	32	74.8	546
181.mcf	32	156	428	32	130	513
186.crafty	32	63.0	590	32	60.4	614
197.parser	32	146	458	32	133	501
252.eon	32	77.8	620	32	75.2	642
253.perlbmk	32	118	564	32	117	569
254.gap	32	125	326	32	118	345
255.vortex	32	75.2	938	32	72.9	967
256.bzip2	32	111	502	32	108	515
300.twolf	32	188	591	32	189	590

Hardware

CPU:	SPARC64 V
CPU MHz:	2160
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	1 to 32 (increments of 1)
Parallel:	None
Primary Cache:	128KBI + 128KBD on chip
Secondary Cache:	4MB(I+D) on chip
L3 Cache:	None
Other Cache:	None
Memory:	64GB (512MB x 128)
Disk Subsystem:	1 x 36.4GB SCSI (10000rpm)
Other Hardware:	None

Software

Operating System:	Solaris 10
Compiler:	Studio 11
File System:	ufs
System State:	multi user

Notes/Tuning Information

```
FDO: (for Sun Studio 11)
fdo_pre0=rm -rf ./feedback.profile ./SunWS_cache
PASS1=-xprofile=collect:./feedback
PASS2=-xprofile=use:./feedback

Integer base flags:
(using C compiler of Sun Studio 11)
-fast -xtarget=ultra3cu -xipo=2 ONESTEP=yes FDO
(using C++ compiler of Sun Studio 11)
-fast -xipo=2 ONESTEP=yes FDO

Integer peak flags:
(using C compiler of Sun Studio 11)
164.gzip:     -xarch=v8plusb -xchip=ultra2 -xcache=128/64/2:4096/64/4
              -xalias_level=std -xipo=2 -W2,-whole -xO5 ONESTEP=yes FDO
175.vpr:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=std -xchip=ultra2 -xipo=2 ONESTEP=yes FDO
176.gcc:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -ll2amm ONESTEP=yes FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xprefetch_level=3 -W2,-Apf:llist=3:noinnerllist
              ONESTEP=yes FDO
186.crafty:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xpagesize=512K -W2,-Ashort_ldst
              ONESTEP=yes FDO
197.parser:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -Wc,-Qgsched-T6,
              -Qgsched-trace_late=1,-Qipa:valueprediction ONESTEP=yes FDO
253.perlbmk:  -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=std ONESTEP=yes FDO
254.gap:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xalias_level=strong -xipo=2 -xprefetch_level=3 -xvector
              -W2,-Abcopy ONESTEP=yes FDO
255.vortex:   -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xrestrict -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
              -Wc,-Qdepgraph-early_cross_call=1 -ll2amm ONESTEP=yes FDO
256.bzip2:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 -xalias_level=strong -xrestrict ONESTEP=yes FDO
300.twolf:    -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -xipo=2 ONESTEP=yes FDO

(using C++ compiler of Sun Studio 11)
252.eon:      -fast -xarch=v8plusb -xchip=ultra3cu -xcache=128/64/2:4096/64/4
              -noex -xalias_level=compatible -xipo=2
              -Qoption cg -Qeps:enabled=1,-Qeps:ws=32 ONESTEP=yes FDO

Portability:
176.gcc:      -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
186.crafty:   -DSUN
253.perlbmk:  -DSPEC_CPU2000_SOLARIS
254.gap:      -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
              -DSYS_HAS_CALLOC_PROTO

System Tunables:
(for /etc/system)
      set consistent_coloring=1
      set tune_t_fsflushr=86400
      set autoup=86400
      set memscrub_period_sec=172800

Shell Environments:
      Stack size set to unlimited via "ulimit -s unlimited"
      MPSSHEAP=4M
      MPSSSTACK=4M
      LD_PRELOAD=mpss.so.1

Sun Studio 11, posted at URL http://www.sun.com/software/products/studio/index.xml
was used for this submission.
```