CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

IBM Corporation

AMD Opteron LS21 for IBM BladeCenter (AMD Opteron (TM) 2218)

SPECfp2000 = 2228

SPECfp_base2000 = 1999

SPEC license #: 11 | Tested by: IBM Corporation | Test date: Aug-2006 | Hardware Avail: Aug-2006 | Software Avail: Mar-2006

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	57.9	2765	50.9	3146
171.swim	3100	107	2896	98.7	3141
172.mgrid	1800	99.2	1815	88.5	2033
173.applu	2100	96.8	2169	87.7	2393
177.mesa	1400	69.4	2017	65.0	2154
178.galgel	2900	87.4	3317	86.4	3356
179.art	2600	94.2	2760	70.1	3707
183.equake	1300	101	1284	70.2	1852
187.facerec	1900	71.4	2662	69.2	2744
188.ammp	2200	144	1531	138	1597
189.lucas	2000	91.2	2193	78.3	2555
191.fma3d	2100	120	1755	121	1733
200.sixtrack	1100	129	855	121	909
301.apsi	2600	160	1627	148	1760

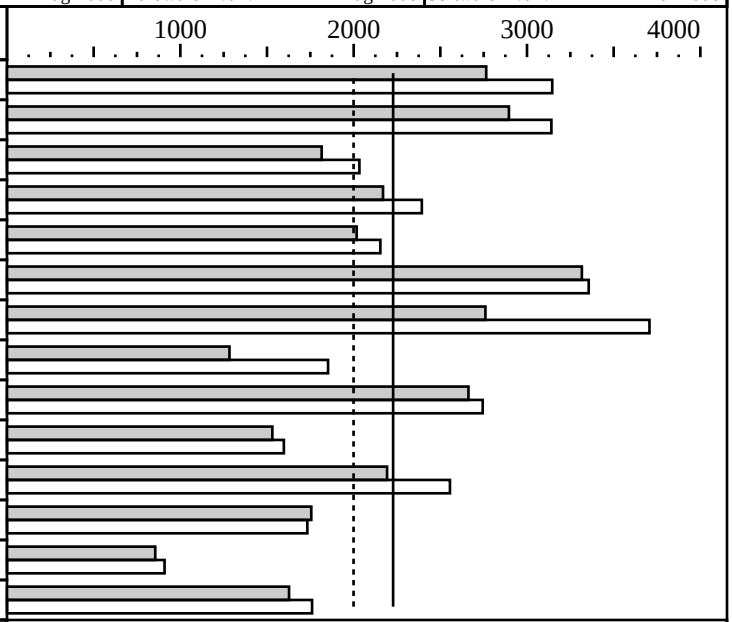

Hardware

CPU:	AMD Opteron 2218
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	64KBI + 64KBD (on chip) per core
Secondary Cache:	1024KB (I+D) (on chip) per core
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x2GB, PC2-5300
Disk Subsystem:	SAS, 36GB 10K RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux 9.0 SP3 SLES 64 bit Kernel 2.6.5-7.244-smp
Compiler:	PathScale EKO Compiler Suite, Release 2.4 PathScale EKOPath(TM) Compiler Suite, Release 2.4
File System:	Linux/reiserfs
System State:	Multi-user, run level 3

Notes/Tuning Information

```
  +FDO: PASS1= -fb_create fbdata  PASS2= -fb_opt fbdata

  Baseline optimization
    C programs:       -Ofast -WOPT:mem_opnds=on +FDO
    Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
  Portability Flags:
    178.galgel: -fixedform

 Peak Tuning:
  168.wupwise:  -Ofast -IPA:linear=on -LNO:prefetch_ahead=5:prefetch=3
                -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
  171.swim:     -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow
  172.mgrid:    -Ofast -CG:gcm=off -OPT:IEEE_arith=3:unroll_size=200
                -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
                -WOPT:mem_opnds=on:aggstr=0
  173.applu:    -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
                -LNO:fusion=2:fission=2:full_unroll_size=10000 +FDO
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
177.mesa:     -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel:   -Ofast -OPT:fast_complex=on +FDO
179.art:      -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.equake:   -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec:  -Ofast -IPA:plimit=1500 -LNO:fusion=2
              -OPT:IEEE_NaN_Inf=off:ro=3:unroll_size=0 +FDO
188.ammp:     -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
              -GRA:optimize_boundary=on -fno-math-errno -TENV:X=4 +FDO
189.lucas:    -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d:    -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
              -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:early_intrinsics=on
              -fno-math-errno -CG:load_exe=1 +FDO
301.apsi:     -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2
```