SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2220 SE)

SPECint®_rate2006 = 51.3

SPECint_rate_base2006 = 45.6

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

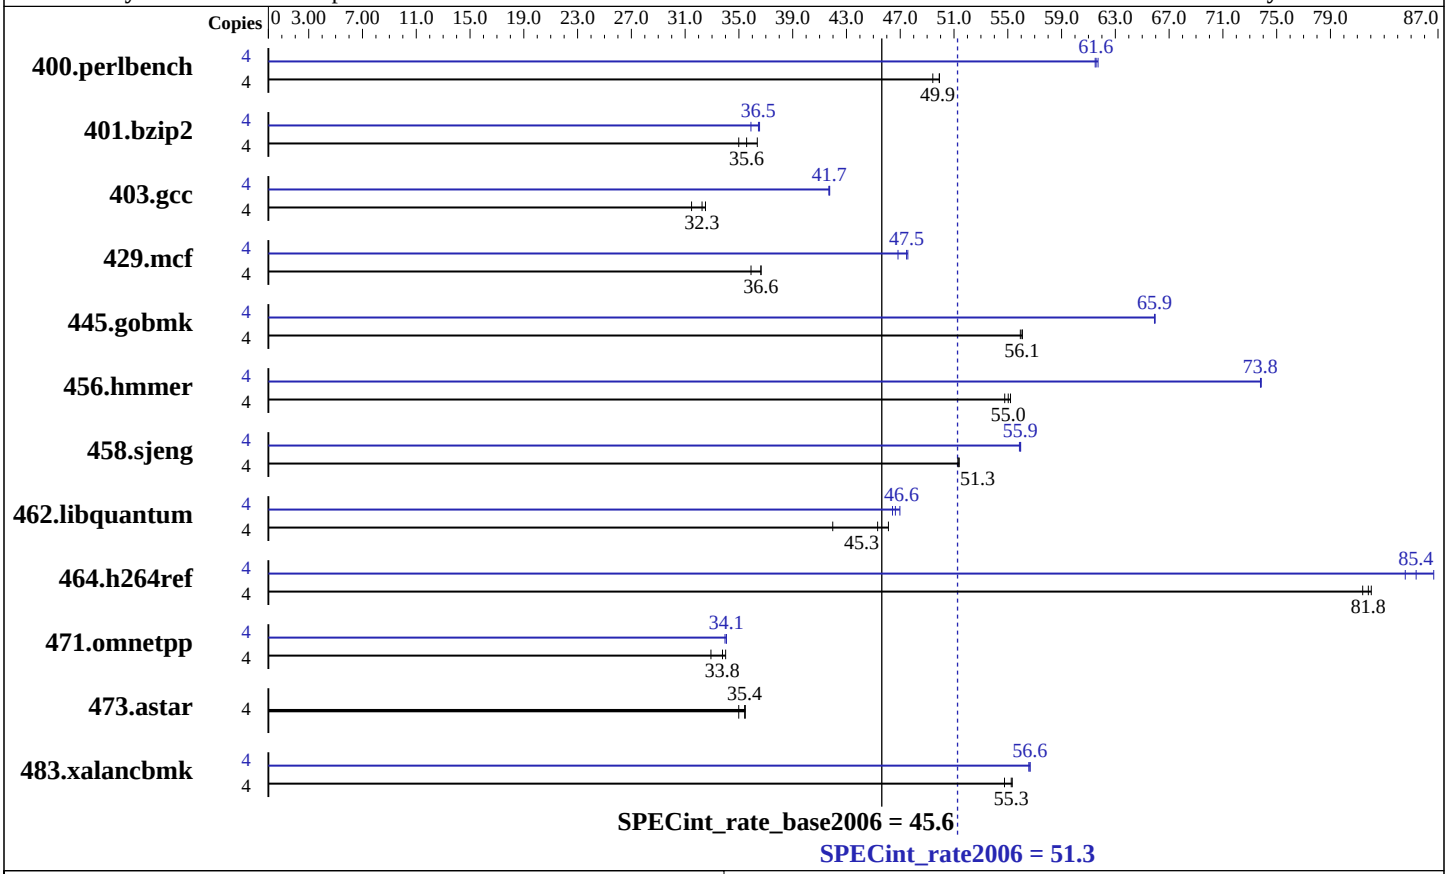

Hardware

CPU Name:	AMD Opteron 2220 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (16x1GB, DDR2-667 CL5 ECC Reg)
Disk Subsystem:	1 x SATA, 160 GB
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 EM64T kernel
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ReiserFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32 bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2220 SE)

SPECint_rate2006 = 51.3

SPECint_rate_base2006 = 45.6

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: Jul-2007
Hardware Availability: Jun-2007
Software Availability: Jun-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	791	49.4	**783**	**49.9**	783	49.9	4	635	61.5	**635**	**61.6**	633	61.7
401.bzip2	4	1103	35.0	**1085**	**35.6**	1061	36.4	4	1075	35.9	1057	36.5	**1059**	**36.5**
403.gcc	4	1023	31.5	**998**	**32.3**	990	32.5	4	**772**	**41.7**	771	41.8	772	41.7
429.mcf	4	1016	35.9	995	36.6	**996**	**36.6**	4	779	46.8	767	47.6	**768**	**47.5**
445.gobmk	4	750	55.9	748	56.1	**749**	**56.1**	4	637	65.9	**636**	**65.9**	636	66.0
456.hmmer	4	681	54.8	676	55.2	**678**	**55.0**	4	506	73.8	**506**	**73.8**	505	73.9
458.sjeng	4	944	51.3	942	51.4	**943**	**51.3**	4	**865**	**55.9**	865	56.0	866	55.9
462.libquantum	4	1974	42.0	**1829**	**45.3**	1797	46.1	4	1785	46.4	**1777**	**46.6**	1764	47.0
464.h264ref	4	1087	81.4	1079	82.0	**1082**	**81.8**	4	1021	86.7	**1037**	**85.4**	1047	84.6
471.omnetpp	4	759	32.9	**740**	**33.8**	735	34.0	4	736	34.0	734	34.1	**734**	**34.1**
473.astar	4	803	35.0	**793**	**35.4**	792	35.5	4	803	35.0	**793**	**35.4**	792	35.5
483.xalancbmk	4	504	54.8	**499**	**55.3**	499	55.3	4	488	56.6	487	56.7	**487**	**56.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind cores to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:50:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 August 2007.