SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8214)

SPECint®_rate2006 = 83.0

SPECint_rate_base2006 = 74.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

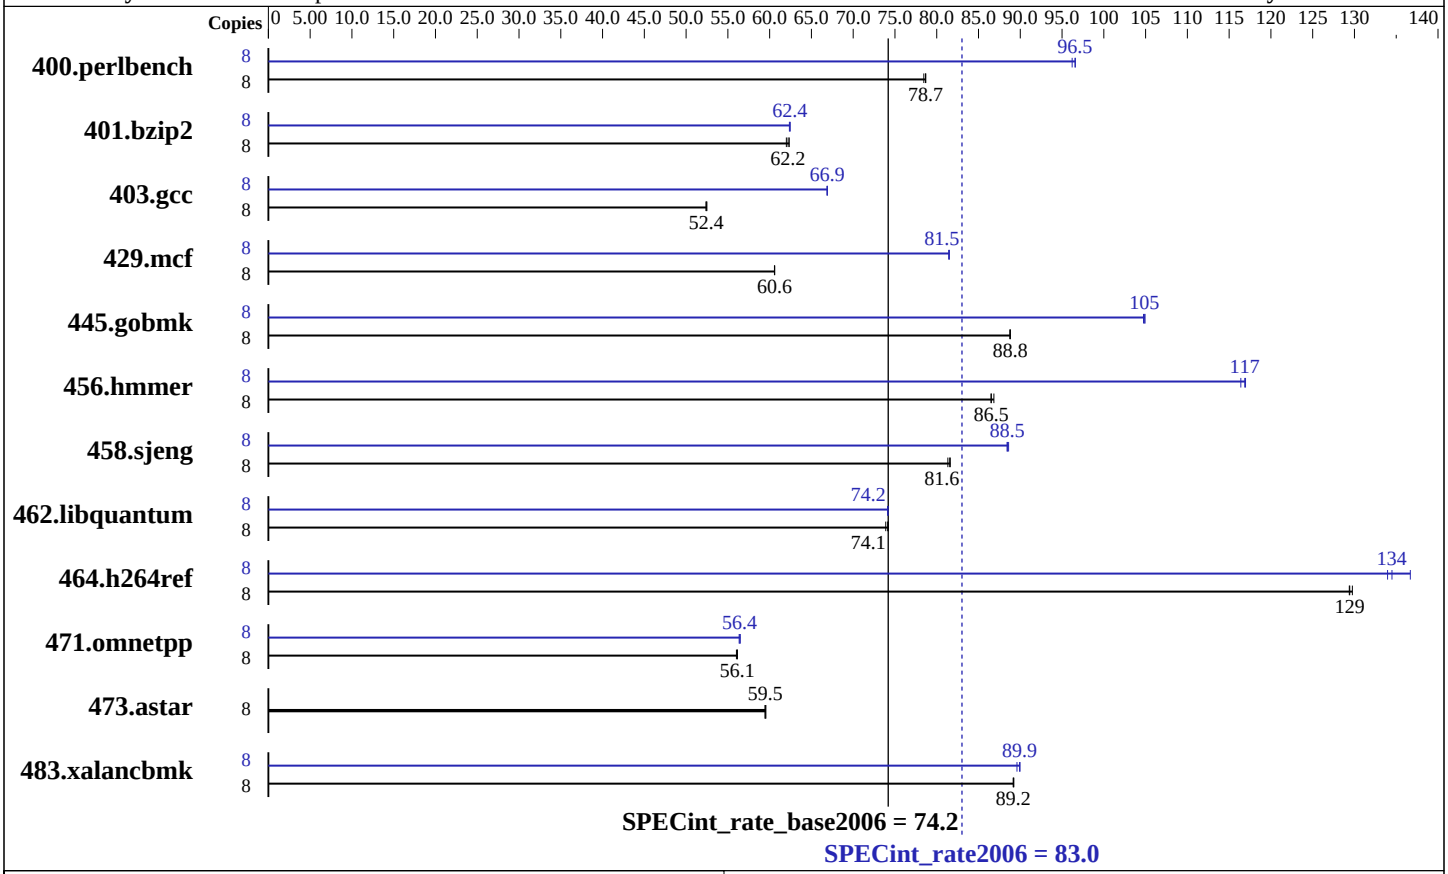

Hardware

CPU Name:	AMD Opteron 8214
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	8 cores, 4 chips, 2 cores/chip
CPU(s) orderable:	1, 2, 3, 4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 (AMD Opteron 8214)

SPECint_rate2006 = 83.0

SPECint_rate_base2006 = 74.2

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	993	78.7	996	78.5	**994**	**78.7**	8	**810**	**96.5**	809	96.6	812	96.2
401.bzip2	8	1238	62.3	**1241**	**62.2**	1245	62.0	8	**1236**	**62.4**	1238	62.4	1236	62.4
403.gcc	8	1227	52.5	1229	52.4	**1229**	**52.4**	8	963	66.9	963	66.9	**963**	**66.9**
429.mcf	8	1204	60.6	**1204**	**60.6**	1204	60.6	8	895	81.5	896	81.4	**895**	**81.5**
445.gobmk	8	**945**	**88.8**	945	88.8	945	88.8	8	801	105	**800**	**105**	800	105
456.hmmer	8	**863**	**86.5**	859	86.8	863	86.5	8	641	116	638	117	**639**	**117**
458.sjeng	8	1186	81.6	1190	81.3	**1187**	**81.6**	8	**1094**	**88.5**	1093	88.6	1095	88.4
462.libquantum	8	2243	73.9	**2236**	**74.1**	2234	74.2	8	2236	74.1	**2235**	**74.2**	2235	74.2
464.h264ref	8	1364	130	**1368**	**129**	1368	129	8	1295	137	1322	134	**1316**	**134**
471.omnetpp	8	**891**	**56.1**	891	56.1	892	56.0	8	887	56.4	885	56.5	**886**	**56.4**
473.astar	8	**944**	**59.5**	943	59.6	945	59.5	8	**944**	**59.5**	943	59.6	945	59.5
483.xalancbmk	8	619	89.2	**619**	**89.2**	619	89.2	8	**614**	**89.9**	616	89.6	614	90.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:26:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 August 2007.