SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS21 (AMD Opteron 2212)

SPECint®2006 = 10.8

SPECint_base2006 = 9.77

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

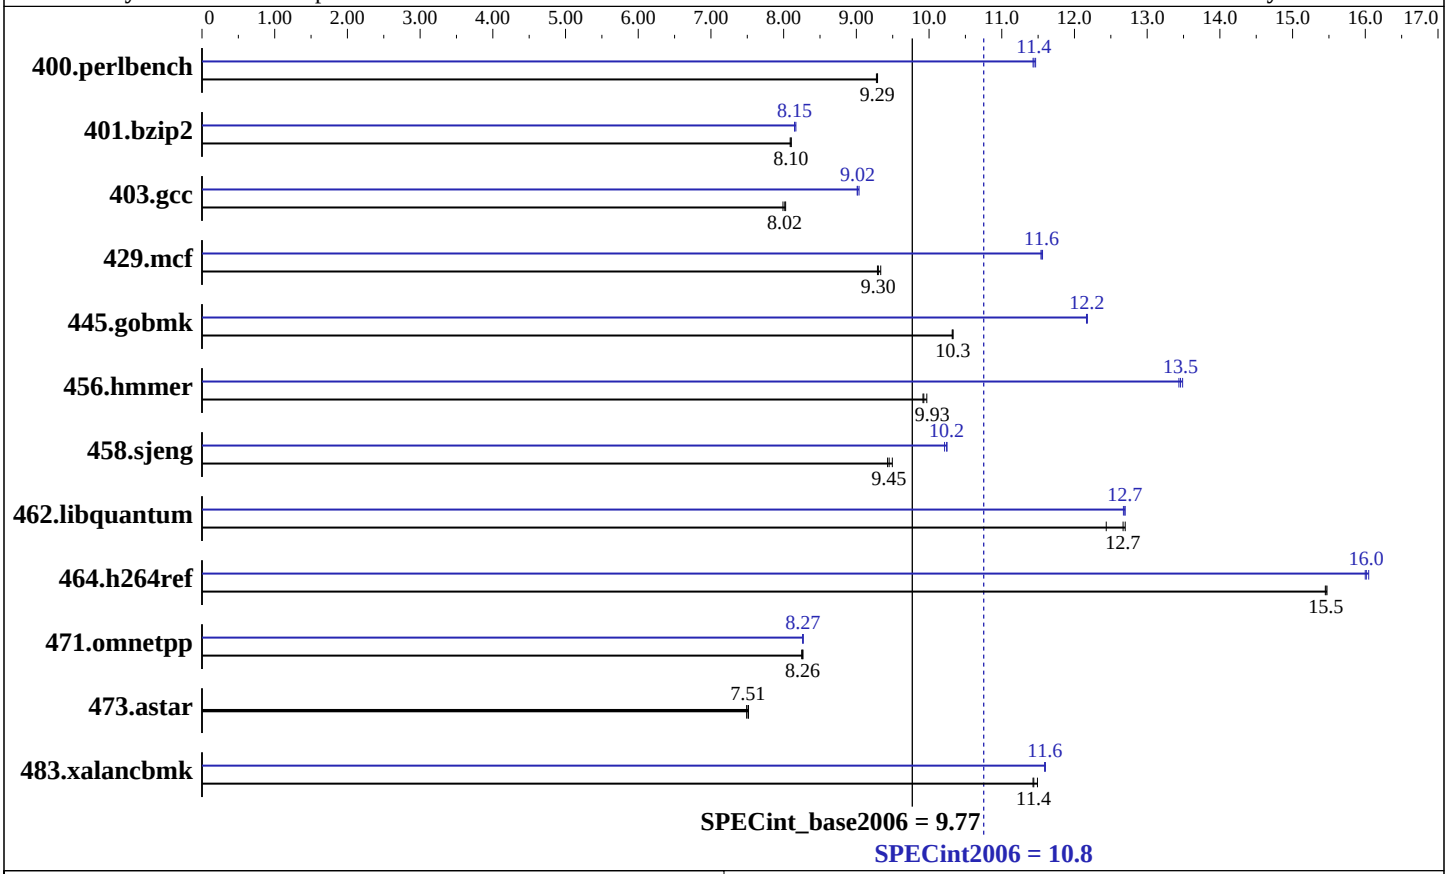

Hardware

CPU Name:	AMD Opteron 2212
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS21 (AMD Opteron 2212)

SPECint2006 = 10.8

SPECint_base2006 = 9.77

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**1052**	**9.29**	1051	9.29	1053	9.28	852	11.5	**854**	**11.4**	855	11.4
401.bzip2	1191	8.10	**1191**	**8.10**	1193	8.09	1181	8.17	**1184**	**8.15**	1184	8.15
403.gcc	1003	8.03	**1004**	**8.02**	1007	7.99	893	9.01	891	9.04	**893**	**9.02**
429.mcf	977	9.34	**980**	**9.30**	982	9.29	790	11.5	789	11.6	**790**	**11.6**
445.gobmk	**1016**	**10.3**	1016	10.3	1017	10.3	862	12.2	**862**	**12.2**	861	12.2
456.hmmer	**940**	**9.93**	936	9.97	941	9.92	692	13.5	694	13.4	**693**	**13.5**
458.sjeng	1274	9.49	1283	9.43	**1280**	**9.45**	**1181**	**10.2**	1181	10.2	1185	10.2
462.libquantum	1666	12.4	1632	12.7	**1636**	**12.7**	1632	12.7	**1632**	**12.7**	1635	12.7
464.h264ref	1432	15.5	1430	15.5	**1431**	**15.5**	1383	16.0	1379	16.0	**1382**	**16.0**
471.omnetpp	756	8.27	**757**	**8.26**	758	8.25	**756**	**8.27**	756	8.27	757	8.26
473.astar	934	7.52	**935**	**7.51**	937	7.49	934	7.52	**935**	**7.51**	937	7.49
483.xalancbmk	600	11.5	**603**	**11.4**	604	11.4	595	11.6	**595**	**11.6**	595	11.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-Ofast -OPT:malloc_alg=1`

C++ benchmarks:
`-Ofast -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Base Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

Peak Compiler Invocation

C benchmarks:
`pathcc`

C++ benchmarks:
`pathCC`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -LNO:opt=0`

401.bzip2: `-O3 -LNO:ou_prod_max=10 -OPT:Ofast -OPT:alias=disjoint`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-m32 -O3 -OPT:Ofast`

429.mcf: `-m32 -O3 -ipa -L/tools/SmartHeap_8.1/lib -lsmartheap`

445.gobmk: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off -WOPT:retype_expr=on`

456.hmmer: `-O2 -OPT:alias=disjoint -OPT:malloc_alg=1 -CG:cflow=0`

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=50000 -IPA:pu_reorder=2`

462.libquantum: `-O3 -ipa -CG:local_fwd_sched=on -IPA:space=1000`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0`

C++ benchmarks:

471.omnetpp: `-Ofast -CG:gcm=off -m32 -L/tools/SmartHeap_8.1/lib -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-Ofast -m32 -OPT:unroll_times_max=8 -L/tools/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:
`-IPA:max_jobs=2`

C++ benchmarks:
`-IPA:max_jobs=2`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS21 (AMD Opteron 2212)

SPECint2006 = 10.8

SPECint_base2006 = 9.77

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Aug-2007
Hardware Availability: Oct-2006
Software Availability: Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:31:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2007.