SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp®_rate2006 = 38.7

SPECfp_rate_base2006 = 36.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

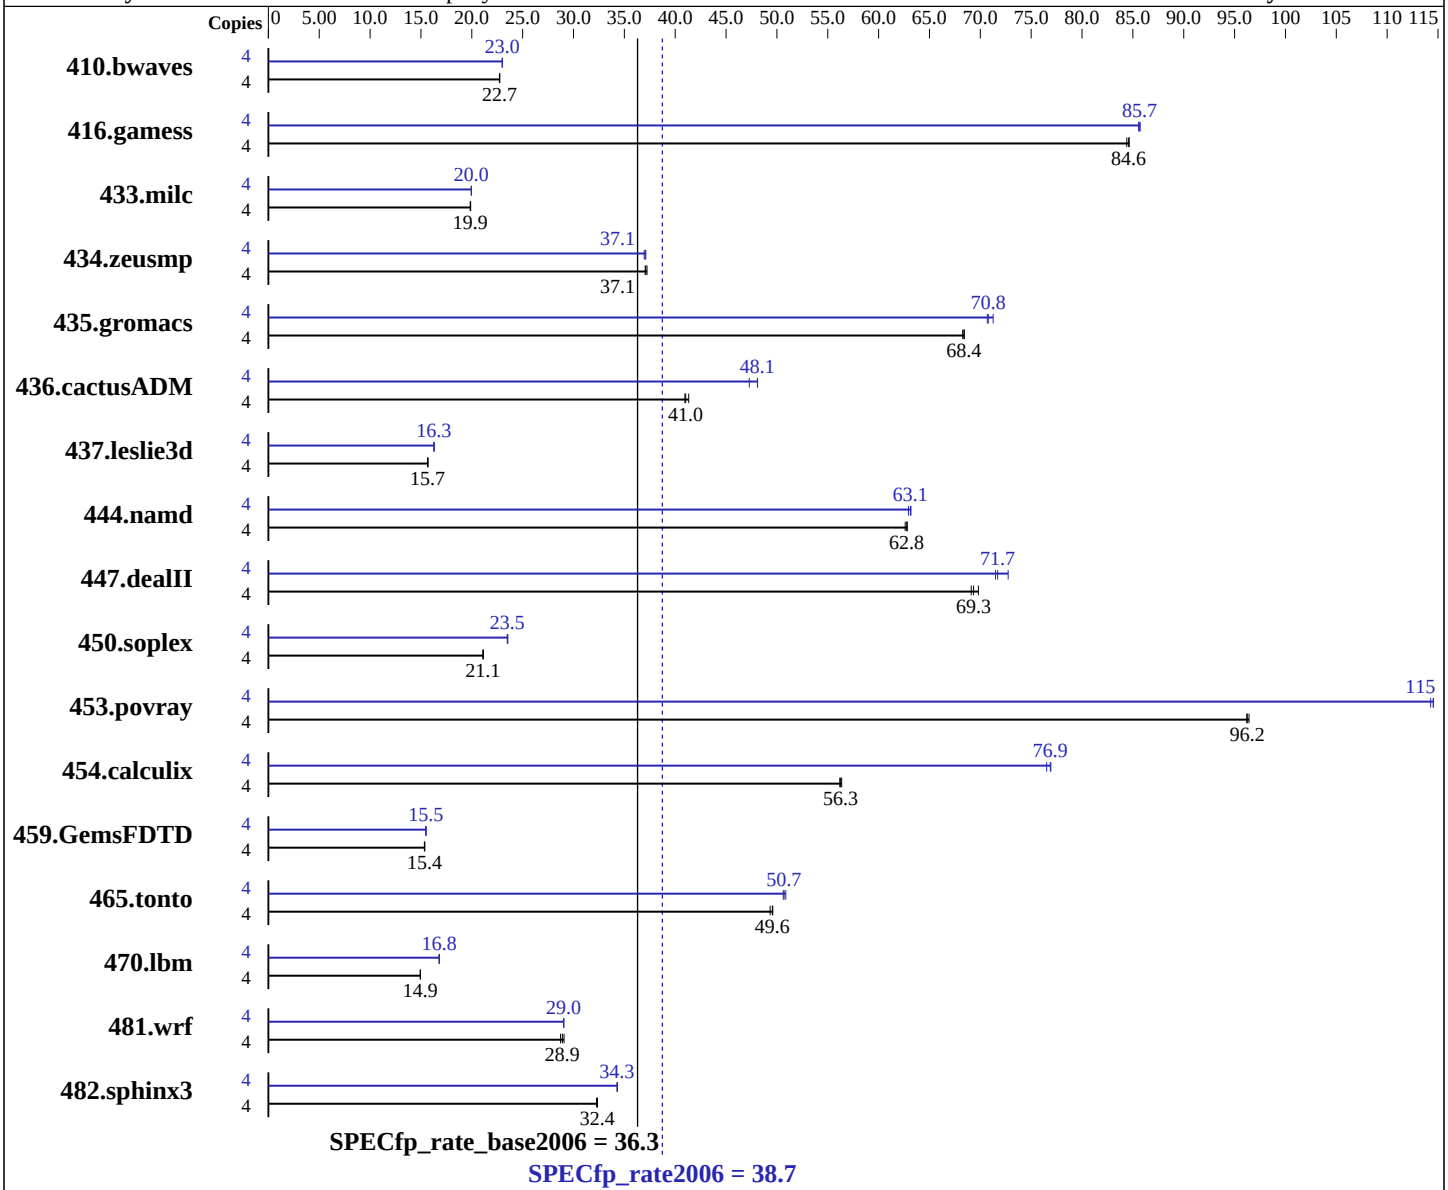

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL380 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_rate2006 = 38.7

SPECfp_rate_base2006 = 36.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2393	22.7	2390	22.7	**2391**	**22.7**	4	**2363**	**23.0**	2363	23.0	2364	23.0
416.gamess	4	925	84.6	**926**	**84.6**	928	84.4	4	914	85.7	915	85.6	**914**	**85.7**
433.milc	4	1850	19.9	1846	19.9	**1849**	**19.9**	4	**1840**	**20.0**	1841	19.9	1839	20.0
434.zeusmp	4	**981**	**37.1**	983	37.0	978	37.2	4	981	37.1	**982**	**37.1**	985	36.9
435.gromacs	4	417	68.4	418	68.3	**418**	**68.4**	4	401	71.3	**403**	**70.8**	404	70.7
436.cactusADM	4	1167	41.0	**1165**	**41.0**	1157	41.3	4	**994**	**48.1**	994	48.1	1011	47.3
437.leslie3d	4	**2399**	**15.7**	2403	15.7	2395	15.7	4	2311	16.3	**2308**	**16.3**	2307	16.3
444.namd	4	512	62.6	**511**	**62.8**	511	62.8	4	510	62.9	508	63.2	**508**	**63.1**
447.dealII	4	655	69.8	662	69.1	**660**	**69.3**	4	640	71.5	629	72.7	**638**	**71.7**
450.soplex	4	**1580**	**21.1**	1581	21.1	1579	21.1	4	1417	23.5	**1420**	**23.5**	1420	23.5
453.povray	4	**221**	**96.2**	221	96.4	221	96.2	4	186	114	**186**	**115**	186	115
454.calculix	4	587	56.2	**586**	**56.3**	585	56.4	4	**429**	**76.9**	431	76.5	429	76.9
459.GemsFDTD	4	2759	15.4	2767	15.3	**2765**	**15.4**	4	2738	15.5	**2738**	**15.5**	2742	15.5
465.tonto	4	794	49.6	**794**	**49.6**	798	49.3	4	777	50.6	**776**	**50.7**	774	50.9
470.lbm	4	3678	14.9	3677	14.9	**3678**	**14.9**	4	3272	16.8	**3272**	**16.8**	3272	16.8
481.wrf	4	1537	29.1	**1546**	**28.9**	1555	28.7	4	**1539**	**29.0**	1539	29.0	1538	29.0
482.sphinx3	4	2416	32.3	**2410**	**32.4**	2409	32.4	4	2274	34.3	2271	34.3	**2273**	**34.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch Disabled
  Hardware Prefetcher Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:37:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 September 2007.