SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp®_rate2006 = 38.8

SPECfp_rate_base2006 = 36.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

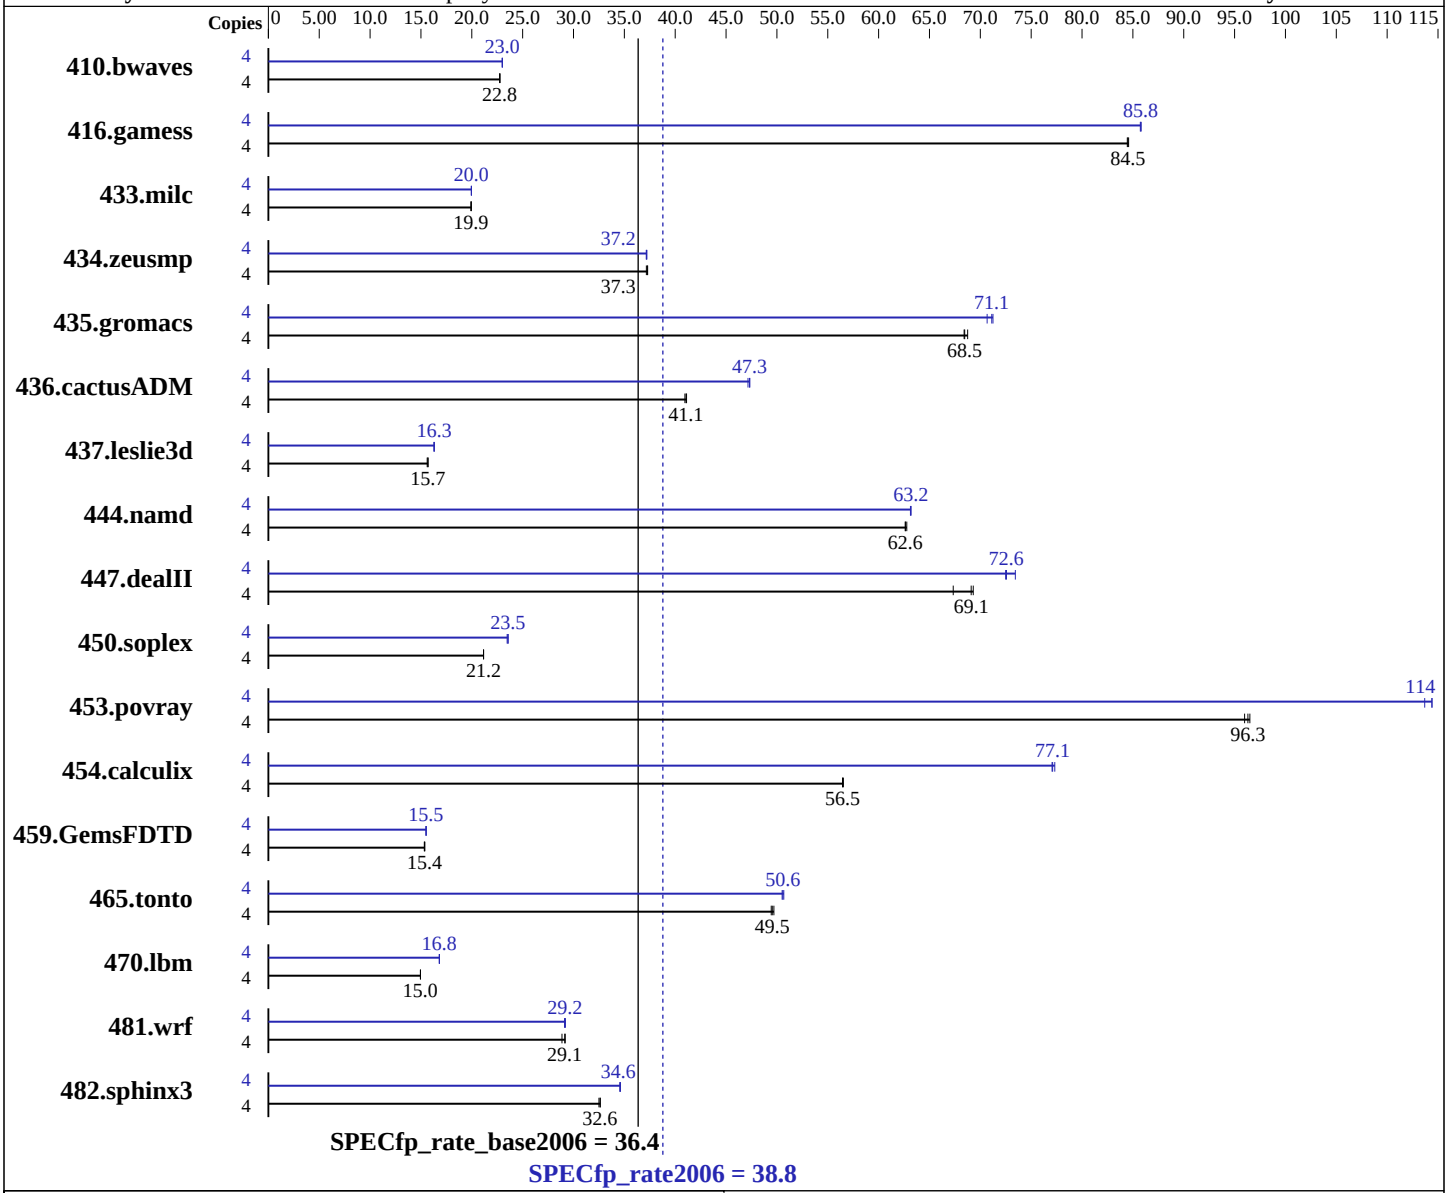

Hardware

CPU Name:	Intel Xeon X5365
CPU Characteristics:	3.0 GHz, 2x4 MB L2 shared, 1333 MHz system bus
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1 kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	No
File System:	ext2
System State:	Multi-user run level 3
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G5
(3.0 GHz, Intel Xeon processor X5365)

SPECfp_rate2006 = 38.8

SPECfp_rate_base2006 = 36.4

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Aug-2007
Hardware Availability: Sep-2007
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2390	22.7	**2389**	**22.8**	2388	22.8	4	**2363**	**23.0**	2363	23.0	2364	23.0
416.gamess	4	926	84.6	**927**	**84.5**	927	84.5	4	913	85.8	**913**	**85.8**	914	85.7
433.milc	4	**1842**	**19.9**	1843	19.9	1840	20.0	4	**1840**	**20.0**	1839	20.0	1840	20.0
434.zeusmp	4	979	37.2	**977**	**37.3**	976	37.3	4	**979**	**37.2**	980	37.2	978	37.2
435.gromacs	4	415	68.8	418	68.4	**417**	**68.5**	4	404	70.7	**402**	**71.1**	401	71.2
436.cactusADM	4	1163	41.1	1167	41.0	**1164**	**41.1**	4	1014	47.2	**1010**	**47.3**	1010	47.3
437.leslie3d	4	**2397**	**15.7**	2408	15.6	2395	15.7	4	2305	16.3	2309	16.3	**2306**	**16.3**
444.namd	4	**512**	**62.6**	511	62.8	512	62.6	4	**508**	**63.2**	508	63.2	508	63.1
447.dealII	4	660	69.3	**662**	**69.1**	680	67.3	4	623	73.4	**631**	**72.6**	631	72.5
450.soplex	4	**1577**	**21.2**	1577	21.2	1577	21.2	4	**1417**	**23.5**	1421	23.5	1415	23.6
453.povray	4	222	96.0	**221**	**96.3**	221	96.5	4	186	114	187	114	**186**	**114**
454.calculix	4	584	56.5	585	56.4	**584**	**56.5**	4	427	77.3	428	77.1	**428**	**77.1**
459.GemsFDTD	4	2768	15.3	2758	15.4	**2764**	**15.4**	4	2737	15.5	2737	15.5	**2737**	**15.5**
465.tonto	4	**794**	**49.5**	792	49.7	796	49.4	4	777	50.7	**778**	**50.6**	779	50.5
470.lbm	4	3676	15.0	3675	15.0	**3675**	**15.0**	4	3269	16.8	3269	16.8	**3269**	**16.8**
481.wrf	4	1548	28.9	**1533**	**29.1**	1531	29.2	4	1534	29.1	1530	29.2	**1533**	**29.2**
482.sphinx3	4	2399	32.5	**2390**	**32.6**	2389	32.6	4	**2254**	**34.6**	2252	34.6	2256	34.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch Disabled
  Hardware Prefetcher Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):
```
/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include
```

433.milc: `icc`

C++ benchmarks (except as noted below):
```
icpc
```

450.soplex: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/icpc -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Fortran benchmarks (except as noted below):
```
ifort
```

437.leslie3d: `/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/bin/ifort -L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/lib -I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux32/include`

Benchmarks using both Fortran and C:
```
icc ifort
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -scalar-rep- -prefetch -opt-malloc-options=3`

482.sphinx3: `-fast -unroll2`

C++ benchmarks:

444.namd: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -fno-alias -auto-ilp32`

447.dealII: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias -scalar-rep-`

450.soplex: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -opt-malloc-options=3`

453.povray: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -ansi-alias`

Fortran benchmarks:

410.bwaves: `-fast -prefetch`

416.gamess: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -ansi-alias -scalar-rep-`

434.zeusmp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast`

437.leslie3d: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -opt-malloc-options=3`

459.GemsFDTD: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -Ob0 -prefetch`

465.tonto: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4 -auto`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

436.cactusADM: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -prefetch -auto-ilp32`

454.calculix: `-fast -unroll-aggressive -auto-ilp32`

481.wrf: `-fast -auto-ilp32`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-flags.20090714.01.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 12:36:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 September 2007.