



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp®\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2007

Hardware Availability: Oct-2007

Software Availability: Sep-2007

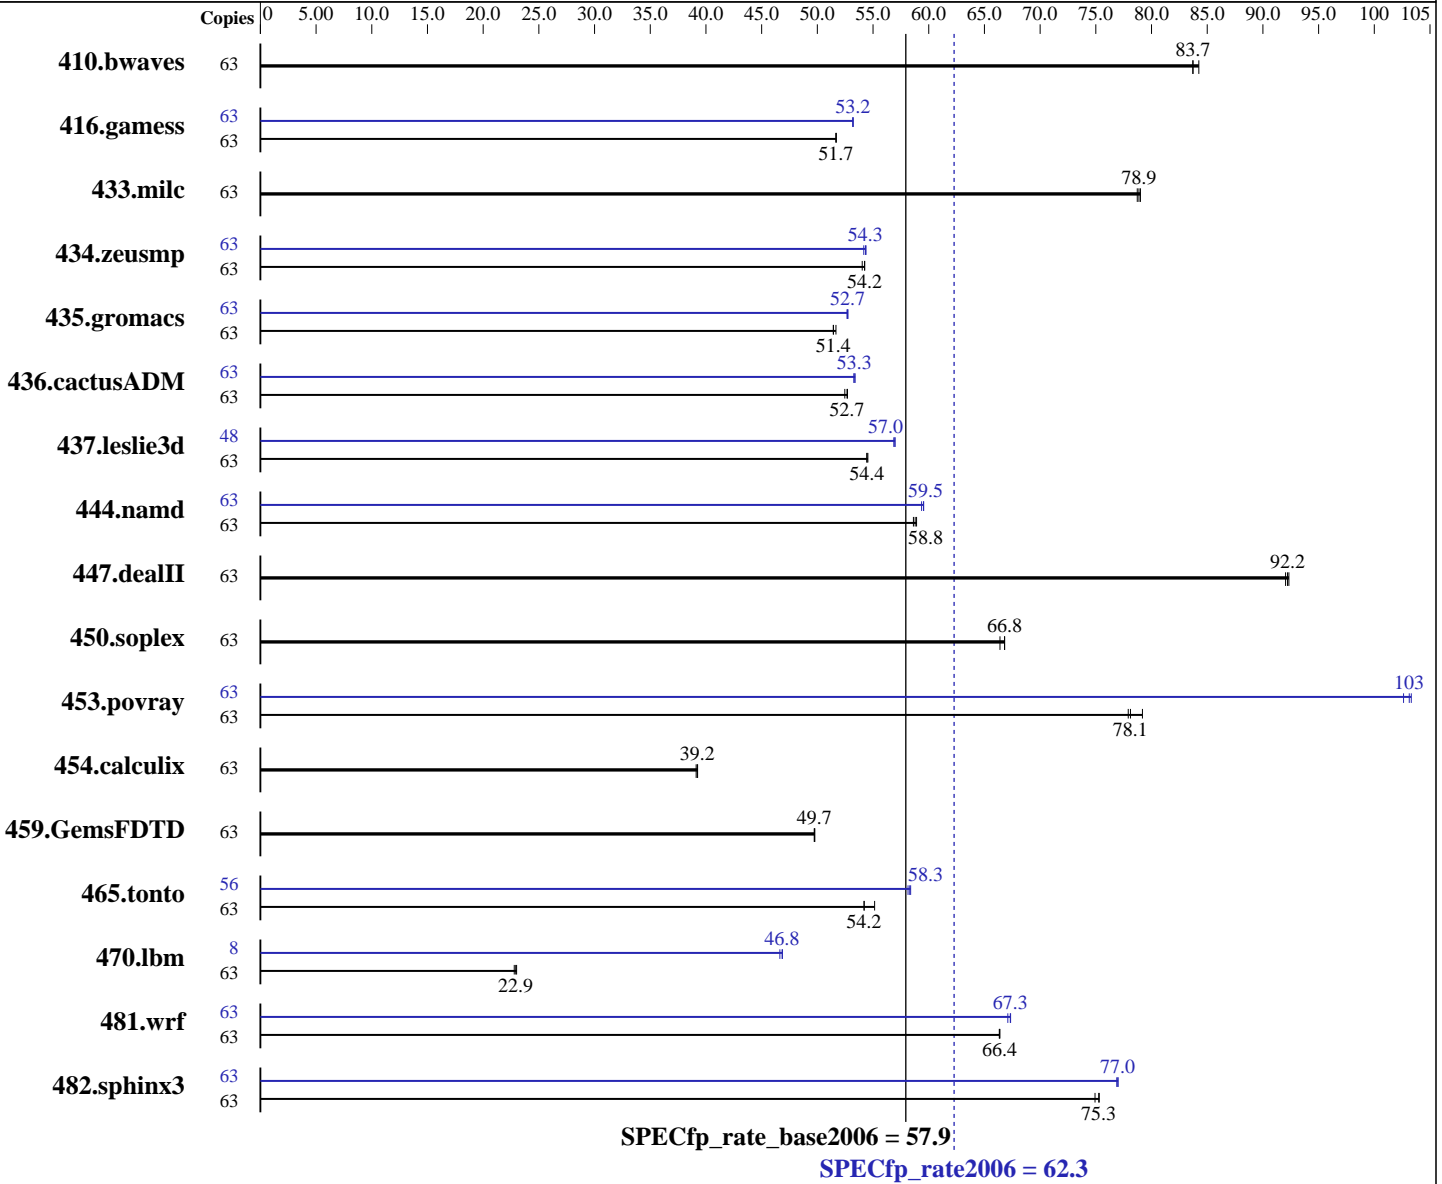

### Hardware

CPU Name: UltraSPARC T2  
 CPU Characteristics:  
 CPU MHz: 1417  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 8 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 16 KB I + 8 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Solaris 10 8/07 (build s10s\_u4wos\_10)  
 Compiler: Sun Studio 12 (build 2007/05/20)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19  
Test sponsor: Fujitsu Limited  
Tested by: Sun Microsystems

Test date: Jul-2007  
Hardware Availability: Oct-2007  
Software Availability: Sep-2007

L3 Cache: None  
Other Cache: None  
Memory: 64 GB (16 x 4 GB)  
Disk Subsystem: 275 GB Solaris Volume Manager  
RAID 0, interlace 384KB, on  
5 x SUN72G 10K RPM SAS disks;  
ufs fragment size 8192 bytes  
Other Hardware: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	63	10163	84.2	<b>10226</b>	<b>83.7</b>	10228	83.7	63	10163	84.2	<b>10226</b>	<b>83.7</b>	10228	83.7		
416.gamess	63	23870	51.7	23865	51.7	<b>23868</b>	<b>51.7</b>	63	23183	53.2	23195	53.2	<b>23185</b>	<b>53.2</b>		
433.milc	63	7347	78.7	7320	79.0	<b>7333</b>	<b>78.9</b>	63	7347	78.7	7320	79.0	<b>7333</b>	<b>78.9</b>		
434.zeusmp	63	10611	54.0	<b>10570</b>	<b>54.2</b>	10568	54.3	63	10544	54.4	<b>10554</b>	<b>54.3</b>	10584	54.2		
435.gromacs	63	8746	51.4	<b>8743</b>	<b>51.4</b>	8706	51.7	63	8527	52.8	8542	52.7	<b>8534</b>	<b>52.7</b>		
436.cactusADM	63	14284	52.7	<b>14295</b>	<b>52.7</b>	14349	52.5	63	<b>14122</b>	<b>53.3</b>	14129	53.3	14100	53.4		
437.leslie3d	63	10876	54.4	<b>10876</b>	<b>54.4</b>	10859	54.5	48	7919	57.0	7935	56.9	<b>7921</b>	<b>57.0</b>		
444.namd	63	8577	58.9	8618	58.6	<b>8596</b>	<b>58.8</b>	63	<b>8488</b>	<b>59.5</b>	8485	59.5	8512	59.4		
447.dealII	63	<b>7816</b>	<b>92.2</b>	7831	92.0	7806	92.3	63	<b>7816</b>	<b>92.2</b>	7831	92.0	7806	92.3		
450.soplex	63	7913	66.4	<b>7864</b>	<b>66.8</b>	7864	66.8	63	7913	66.4	<b>7864</b>	<b>66.8</b>	7864	66.8		
453.povray	63	4233	79.2	4302	77.9	<b>4291</b>	<b>78.1</b>	63	3266	103	<b>3250</b>	<b>103</b>	3244	103		
454.calculix	63	<b>13251</b>	<b>39.2</b>	13286	39.1	13241	39.3	63	<b>13251</b>	<b>39.2</b>	13286	39.1	13241	39.3		
459.GemsFDTD	63	<b>13439</b>	<b>49.7</b>	13429	49.8	13443	49.7	63	<b>13439</b>	<b>49.7</b>	13429	49.8	13443	49.7		
465.tonto	63	<b>11437</b>	<b>54.2</b>	11439	54.2	11242	55.1	56	9439	58.4	9477	58.1	<b>9453</b>	<b>58.3</b>		
470.lbm	63	37983	22.8	37632	23.0	<b>37763</b>	<b>22.9</b>	8	2345	46.9	<b>2347</b>	<b>46.8</b>	2357	46.6		
481.wrf	63	10601	66.4	<b>10603</b>	<b>66.4</b>	10608	66.3	63	10449	67.3	10488	67.1	<b>10453</b>	<b>67.3</b>		
482.sphinx3	63	<b>16315</b>	<b>75.3</b>	16305	75.3	16387	74.9	63	15972	76.9	<b>15953</b>	<b>77.0</b>	15946	77.0		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Processes were bound to cores using "submit" and "pbind".

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

```
/etc/system parameters
autoup=600
```

Causes pages older than the listed number of seconds to be written by fsflush.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2007

Hardware Availability: Oct-2007

Software Availability: Sep-2007

## Operating System Notes (Continued)

tune\_t\_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

The "webconsole" service was turned off using svcadm disable webconsole

## Platform Notes

This result was measured on a Sun SPARC Enterprise T5220. All of these are electronically equivalent:

- Sun SPARC Enterprise T5120
- Sun SPARC Enterprise T5220
- Fujitsu SPARC Enterprise T5120
- Fujitsu SPARC Enterprise T5220

This result was run with 5 internal disks. The correct number of disks should have been 4 or fewer for the T5120. The number of disks has a minor effect on T5120 SPEC CPU2006 scores - typically well under 1%. New results have been submitted using 4 or fewer disks.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Base Optimization Flags

C benchmarks:

-g -fast -xipo=2 -xpagesize=4M -xprefetch\_level=2 -xalias\_level=std -xprefetch\_level=3 -xprefetch\_auto\_type=indirect\_array\_access

C++ benchmarks:

-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch\_level=2 -xdepend -xalias\_level=compatible

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19

Test date: Jul-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Oct-2007

Tested by: Sun Microsystems

Software Availability: Sep-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

-g -fast -xipo=2 -xpagesize=4M -xprefetch\_level=2

Benchmarks using both Fortran and C:

-g -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -xprefetch\_level=2  
-xalias\_level=std -xprefetch\_level=3  
-xprefetch\_auto\_type=indirect\_array\_access

## Base Other Flags

C benchmarks:

-xjobs=16 -V

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Fortran benchmarks:

-xjobs=16 -V

Benchmarks using both Fortran and C:

-xjobs=16 -V

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xprefetch\_level=3 -xipo=2 -xrestrict

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19

Test date: Jul-2007

Test sponsor: Fujitsu Limited

Hardware Availability: Oct-2007

Tested by: Sun Microsystems

Software Availability: Sep-2007

## Peak Optimization Flags (Continued)

```
482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xinline= -xprefetch_level=2 -Wc,-Qlp-ol=1 -xrestrict
-xalias_level=strong -fsimple=1 -xlinkopt=2 -lfast
```

### C++ benchmarks:

```
444.namd: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xdepend -xalias_level=compatible -xprefetch_level=1
-xlinkopt=2
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xdepend -xalias_level=compatible -xipo=2 -xrestrict
-xlinkopt=2
```

### Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xlinkopt=2
```

```
434.zeusmp: -g -fast -xpagesize=4M -xipo=1 -qoption cg -Qeps:enabled=1
-qoption cg -Qeps:ws=8 -lmopt
```

```
437.leslie3d: -g -fast -xpagesize_heap=4M -xpagesize_stack=64K
-xprefetch_level=3 -xprefetch=latx:1.6 -qoption cg -Qlp=1
-qoption cg -Qlp-fa=0 -qoption cg -Qlp-fl=1
-qoption cg -Qlp-av=448 -qoption cg -Qlp-t=4
```

459.GemsFDTD: basepeak = yes

```
465.tonto: -g -fast -xpagesize=4M -xipo=2 -lfast
```

### Benchmarks using both Fortran and C:

```
435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -xipo=1 -xinline= -xarch=generic
-xchip=generic -fsimple=0
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 62.3

Fujitsu SPARC Enterprise T5120

SPECfp\_rate\_base2006 = 57.9

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Sun Microsystems

Test date: Jul-2007

Hardware Availability: Oct-2007

Software Availability: Sep-2007

## Peak Optimization Flags (Continued)

436.cactusADM: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xpagesize=4M -xipo=2 -fsimple=1 -xlinkopt=2

454.calculix: basepeak = yes

481.wrf: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-xpagesize=4M -xlinkopt=2

## Peak Other Flags

C benchmarks:  
-xjobs=16 -V

C++ benchmarks:  
-xjobs=16 -verbose=diags,version

Fortran benchmarks:  
-xjobs=16 -V

Benchmarks using both Fortran and C:  
-xjobs=16 -V

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 14:08:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 November 2007.