SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5450, 3.00 GHz)

SPECint®2006 = 26.4

SPECint_base2006 = 23.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

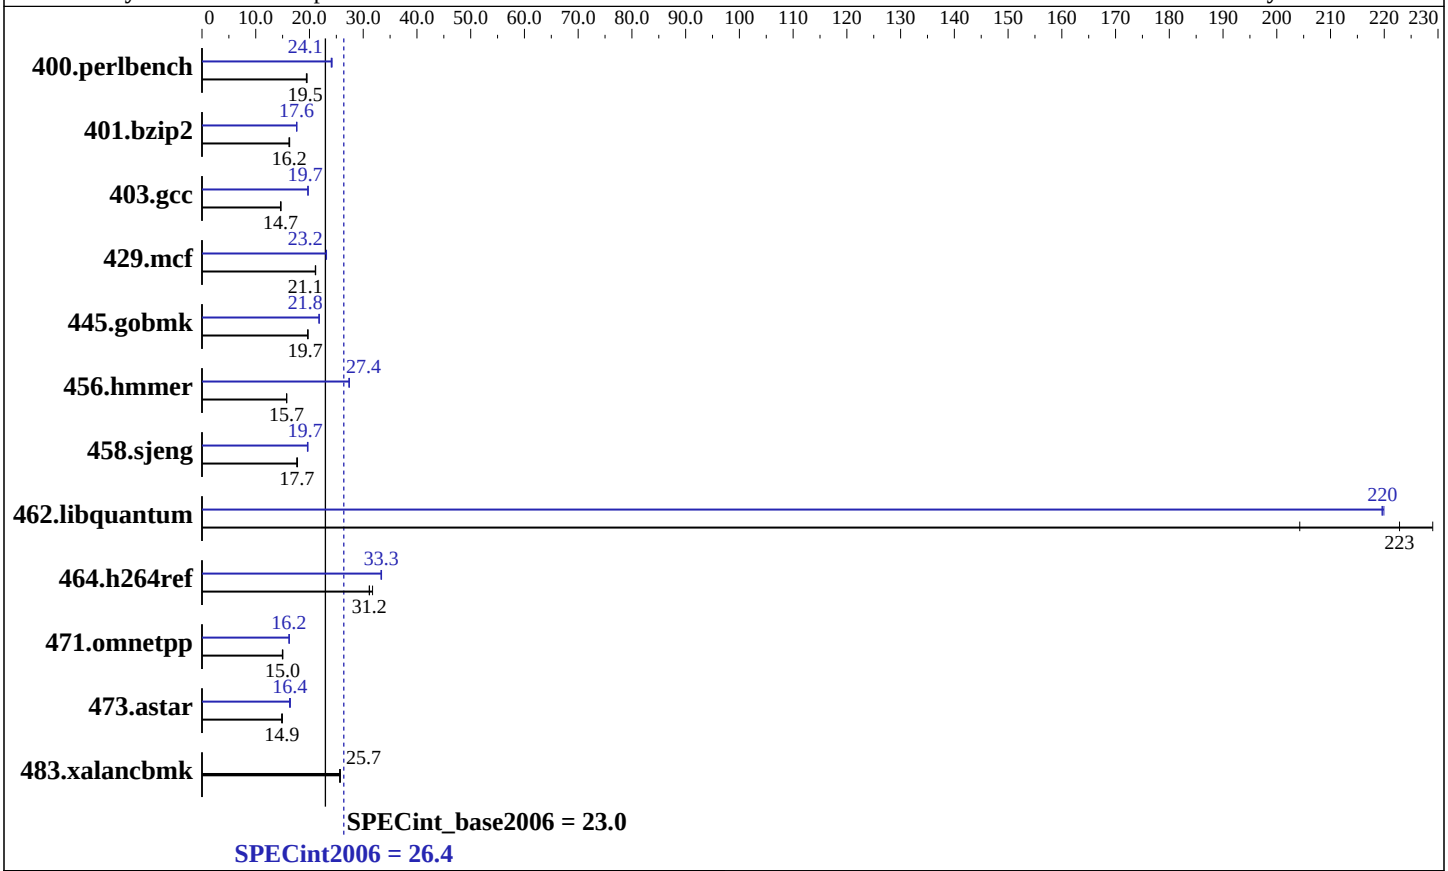

Hardware

CPU Name:	Intel Xeon E5450
CPU Characteristics:	Quad Core, 3.00 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73GB Seagate ST37330LC SCSI 10K RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5450, 3.00 GHz)

SPECint2006 = 26.4

SPECint_base2006 = 23.0

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**501**	**19.5**	503	19.4	500	19.5	406	24.1	403	24.2	**406**	**24.1**
401.bzip2	596	16.2	**594**	**16.2**	591	16.3	548	17.6	547	17.6	**547**	**17.6**
403.gcc	551	14.6	**549**	**14.7**	547	14.7	409	19.7	**408**	**19.7**	408	19.8
429.mcf	**432**	**21.1**	433	21.1	431	21.1	394	23.2	394	23.1	**394**	**23.2**
445.gobmk	532	19.7	**533**	**19.7**	533	19.7	481	21.8	**481**	**21.8**	481	21.8
456.hmmer	**592**	**15.7**	592	15.8	593	15.7	340	27.4	341	27.4	**341**	**27.4**
458.sjeng	681	17.8	685	17.7	**685**	**17.7**	617	19.6	**615**	**19.7**	614	19.7
462.libquantum	**93.0**	**223**	101	204	90.5	229	94.2	220	94.4	220	**94.3**	**220**
464.h264ref	697	31.7	711	31.1	**710**	**31.2**	**664**	**33.3**	662	33.4	664	33.3
471.omnetpp	416	15.0	418	15.0	**416**	**15.0**	385	16.2	**386**	**16.2**	386	16.2
473.astar	474	14.8	469	15.0	**471**	**14.9**	431	16.3	427	16.4	**428**	**16.4**
483.xalancbmk	268	25.7	269	25.6	**269**	**25.7**	268	25.7	269	25.6	**269**	**25.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Enabled
Adjacent Sector Prefetch: Enabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -vec-guard-write -parallel -par-runtime-control
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib  -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:41:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2007.