SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5440, 2.83 GHz)

SPECint®_rate2006 = 130

SPECint_rate_base2006 = 106

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

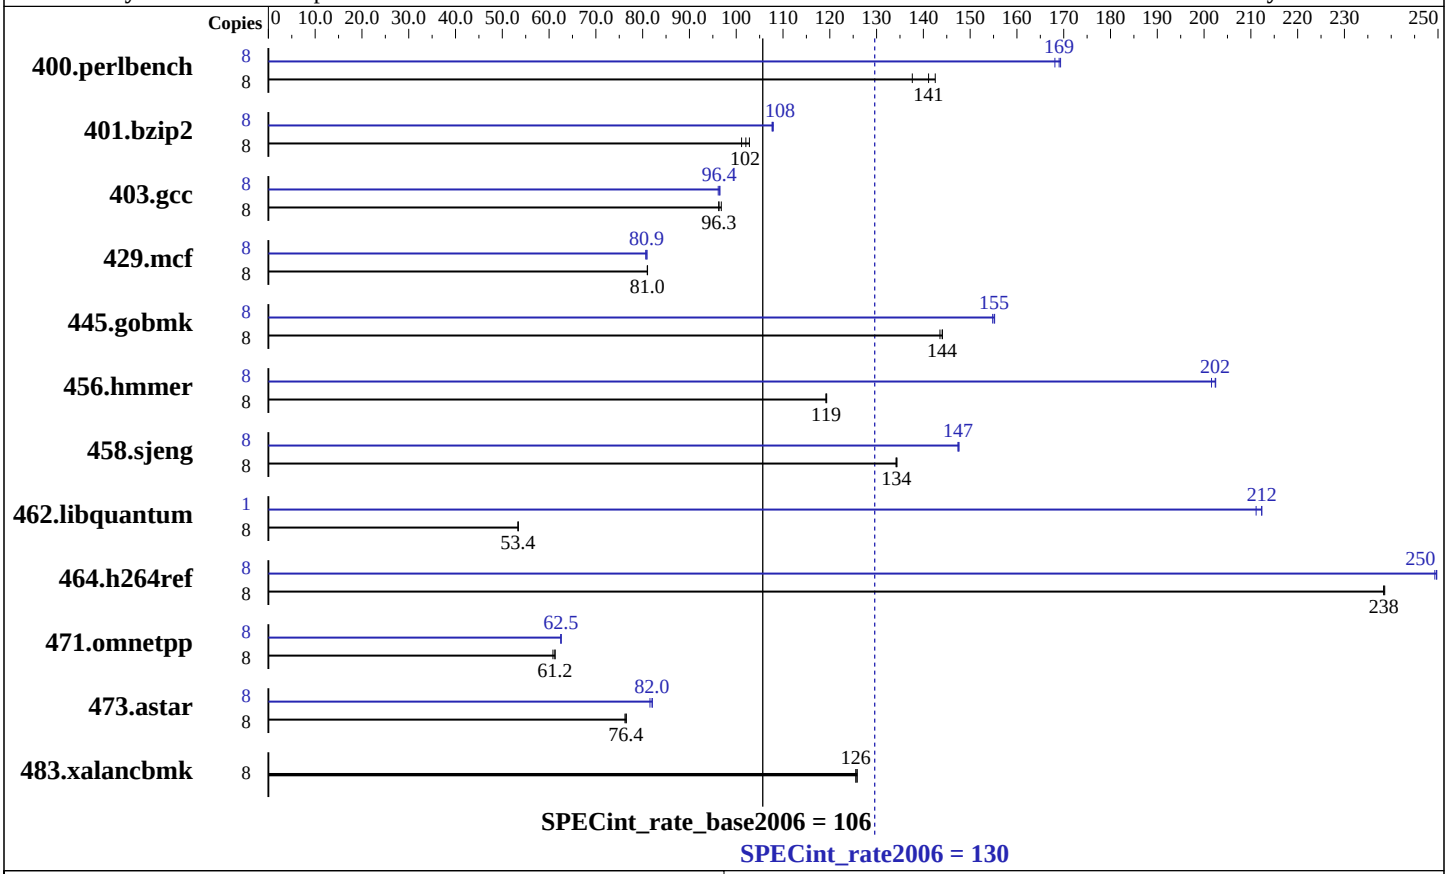

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	Quad Core, 2.83 GHz
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x73GB Seagate ST37330LC SCSI 10K RPM
Other Hardware:	None

Software

Operating System:	64-Bit SUSE LINUX Enterprise Server 10 SP1 RC1, Kernel linux-cbgm 2.6.16.43-0.5-smp for x86_64
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Intel Corporation)

Supermicro X7DB8+ (Intel Xeon processor E5440, 2.83 GHz)

SPECint_rate2006 = 130

SPECint_rate_base2006 = 106

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Nov-2007
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	568	138	548	143	**554**	**141**	8	465	168	462	169	**462**	**169**
401.bzip2	8	763	101	751	103	**756**	**102**	8	717	108	**716**	**108**	715	108
403.gcc	8	669	96.3	**669**	**96.3**	665	96.8	8	670	96.2	**668**	**96.4**	667	96.5
429.mcf	8	901	81.0	900	81.0	**901**	**81.0**	8	902	80.9	905	80.6	**902**	**80.9**
445.gobmk	8	**583**	**144**	585	144	583	144	8	542	155	**541**	**155**	541	155
456.hmmer	8	625	119	**626**	**119**	626	119	8	370	202	**369**	**202**	369	202
458.sjeng	8	**721**	**134**	720	134	722	134	8	657	147	**656**	**147**	656	148
462.libquantum	8	**3105**	**53.4**	3105	53.4	3105	53.4	1	97.6	212	**97.6**	**212**	98.1	211
464.h264ref	8	**742**	**238**	742	239	743	238	8	**709**	**250**	709	250	710	249
471.omnetpp	8	822	60.8	816	61.3	**816**	**61.2**	8	800	62.5	799	62.6	**800**	**62.5**
473.astar	8	734	76.5	737	76.2	**735**	**76.4**	8	684	82.1	**685**	**82.0**	689	81.6
483.xalancbmk	8	440	126	439	126	**440**	**126**	8	440	126	439	126	**440**	**126**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Bios settings:
Hardware Prefetcher:      Enabled
Adjacent Sector Prefetch: Disabled
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
The taskset utility was used to bind processes to cores
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.36.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:39:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 December 2007.