SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480E1
(Intel Xeon X7350,2.93GHz)

SPECint®_rate2006 = 211

SPECint_rate_base2006 = 177

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

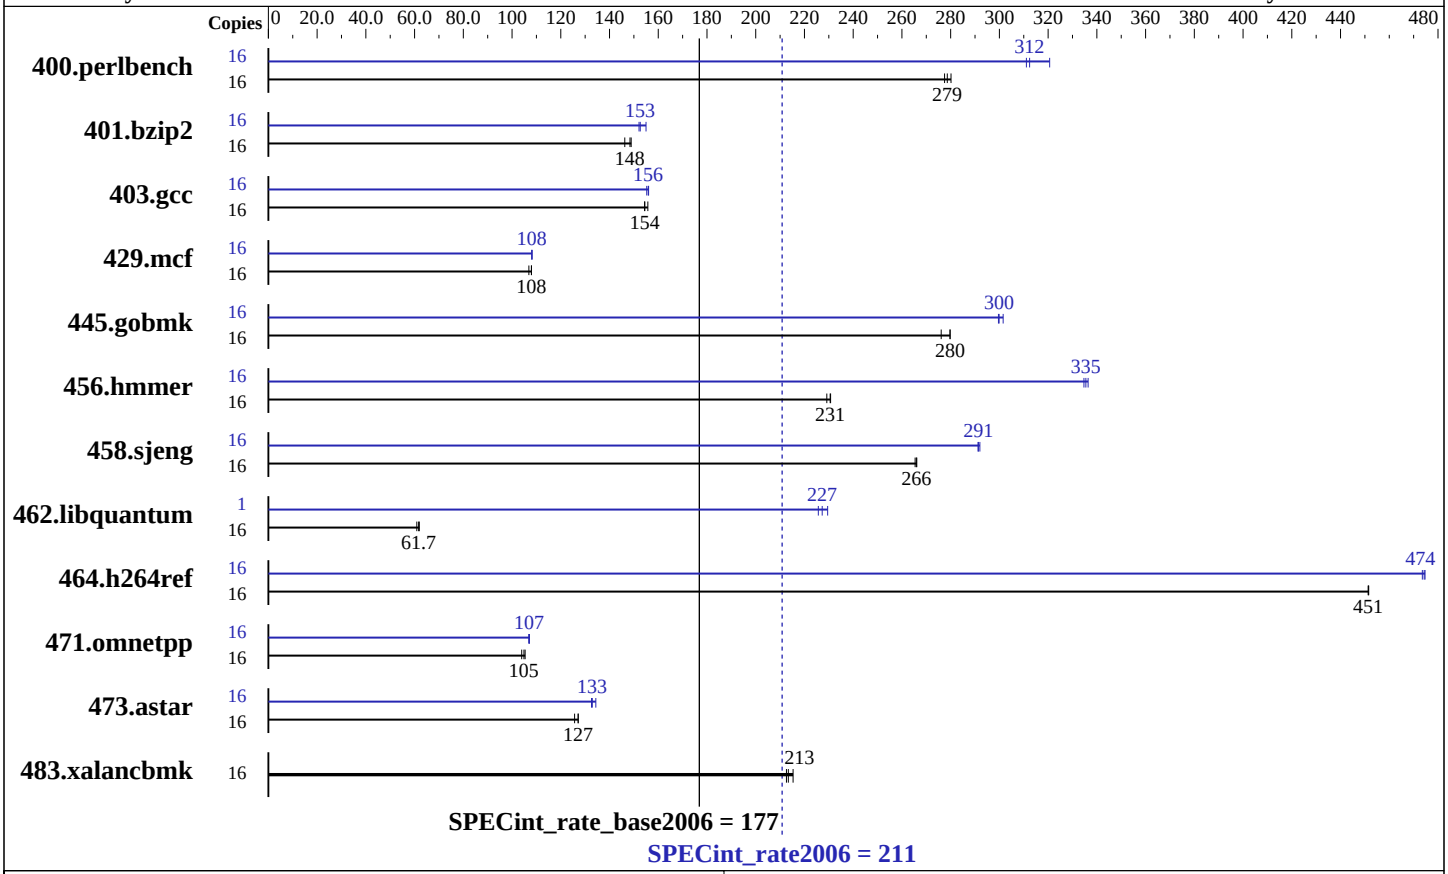

Hardware

CPU Name:	Intel Xeon X7350
CPU Characteristics:	2.93 GHz, 8 MB L2, 1066 MHz system bus
CPU MHz:	2930
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1 to 4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	8 MB I+D on chip per chip, 4 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16x2 GB) FB-DIMM PC2-5300F ECC CL5
Disk Subsystem:	1x73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SUSE LINUX Enterprise Server 10 SP1 Kernel 2.6.16.46-0.12-smp for x86_64
Compiler:	Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070725
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap library V8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480E1
(Intel Xeon X7350,2.93GHz)

SPECint_rate2006 = 211

SPECint_rate_base2006 = 177

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Dec-2007
Hardware Availability: Dec-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	563	278	**561**	**279**	558	280	16	503	311	**500**	**312**	488	321
401.bzip2	16	1056	146	**1040**	**148**	1037	149	16	1015	152	**1012**	**153**	996	155
403.gcc	16	834	154	**834**	**154**	827	156	16	**826**	**156**	825	156	830	155
429.mcf	16	1351	108	1365	107	**1352**	**108**	16	1349	108	**1349**	**108**	1349	108
445.gobmk	16	600	280	608	276	**600**	**280**	16	**560**	**300**	557	302	560	300
456.hmmer	16	647	231	651	229	**647**	**231**	16	**445**	**335**	446	335	444	336
458.sjeng	16	728	266	**728**	**266**	729	265	16	**664**	**291**	663	292	665	291
462.libquantum	16	5353	61.9	5442	60.9	**5377**	**61.7**	1	**91.2**	**227**	91.8	226	90.3	230
464.h264ref	16	784	451	784	452	**784**	**451**	16	748	474	746	475	**747**	**474**
471.omnetpp	16	949	105	962	104	**953**	**105**	16	**934**	**107**	936	107	934	107
473.astar	16	883	127	894	126	**883**	**127**	16	836	134	847	133	**845**	**133**
483.xalancbmk	16	513	215	519	213	**517**	**213**	16	513	215	519	213	**517**	**213**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer
for peak, are compiled in 64-bit mode

/usr/bin/taskset utility used to bind CPU(s) to processes
```

General Notes

```
BIOS settings :
Hardware Prefetcher :  Disabled
Adjacent Cache-Line Prefetch : Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias -prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_flags.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/EM64T_Intel101_flags.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:19:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 February 2008.