SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon E5405)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 86.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

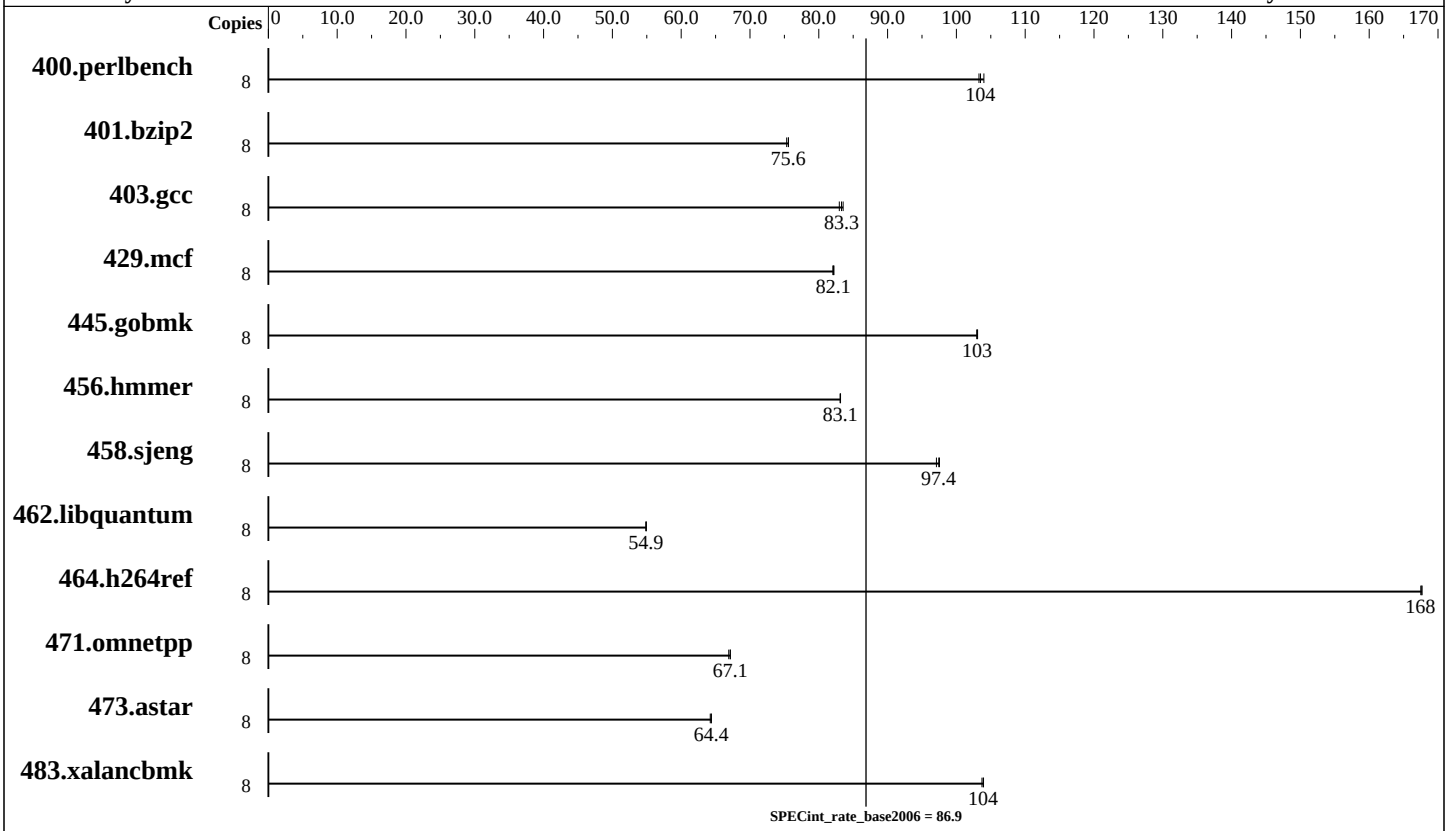

Hardware

CPU Name:	Intel Xeon E5405
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 * 2 GB DDR2 5300F, 2 rank, CL5 ECC)
Disk Subsystem:	1 x SCSI, 73GB, 15000RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler for Linux32 version 10.1 Build 20080112 Package ID: l_cc_p_10.1.012
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-User, Run Level 3
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Binutils 2.17.10.50 MicroQuill SmartHeap 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX221 (Intel Xeon E5405)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 86.9

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Feb-2008
Hardware Availability: Dec-2007
Software Availability: Jan-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	752	104	757	103	**755**	**104**							
401.bzip2	8	1025	75.3	1021	75.6	**1021**	**75.6**							
403.gcc	8	776	83.0	**773**	**83.3**	771	83.5							
429.mcf	8	888	82.2	889	82.0	**888**	**82.1**							
445.gobmk	8	814	103	815	103	**815**	**103**							
456.hmmer	8	898	83.2	**898**	**83.1**	898	83.1							
458.sjeng	8	997	97.1	**993**	**97.4**	992	97.5							
462.libquantum	8	3021	54.9	**3019**	**54.9**	3018	54.9							
464.h264ref	8	1057	167	1056	168	**1056**	**168**							
471.omnetpp	8	**745**	**67.1**	747	66.9	745	67.1							
473.astar	8	874	64.2	872	64.4	**873**	**64.4**							
483.xalancbmk	8	**531**	**104**	532	104	531	104							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
OMP_NUM_THREADS set to number of cores
KMP_STACK_SIZE set to 64M
KMP_AFFINITY set to physical,0
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run.
'/usr/bin/taskset' used to bind benchmark copies to processors.
```

Platform Notes

```
BIOS configuration:
Hardware Prefetcher Disabled (default Enabled)
```

General Notes

```
This result was measured on the Servidor Itautec MX201.
The Servidor Itautec MX221 and the Servidor Itautec MX201 are electronically equivalent.
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs -L/CPU2006/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-Intel-ic10-ia32-intel64-linux-flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Itautec-Intel-ic10-ia32-intel64-linux-flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.1.
Report generated on Tue Jul 22 15:34:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 March 2008.