SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint®2006 = 24.3

SPECint_base2006 = 21.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

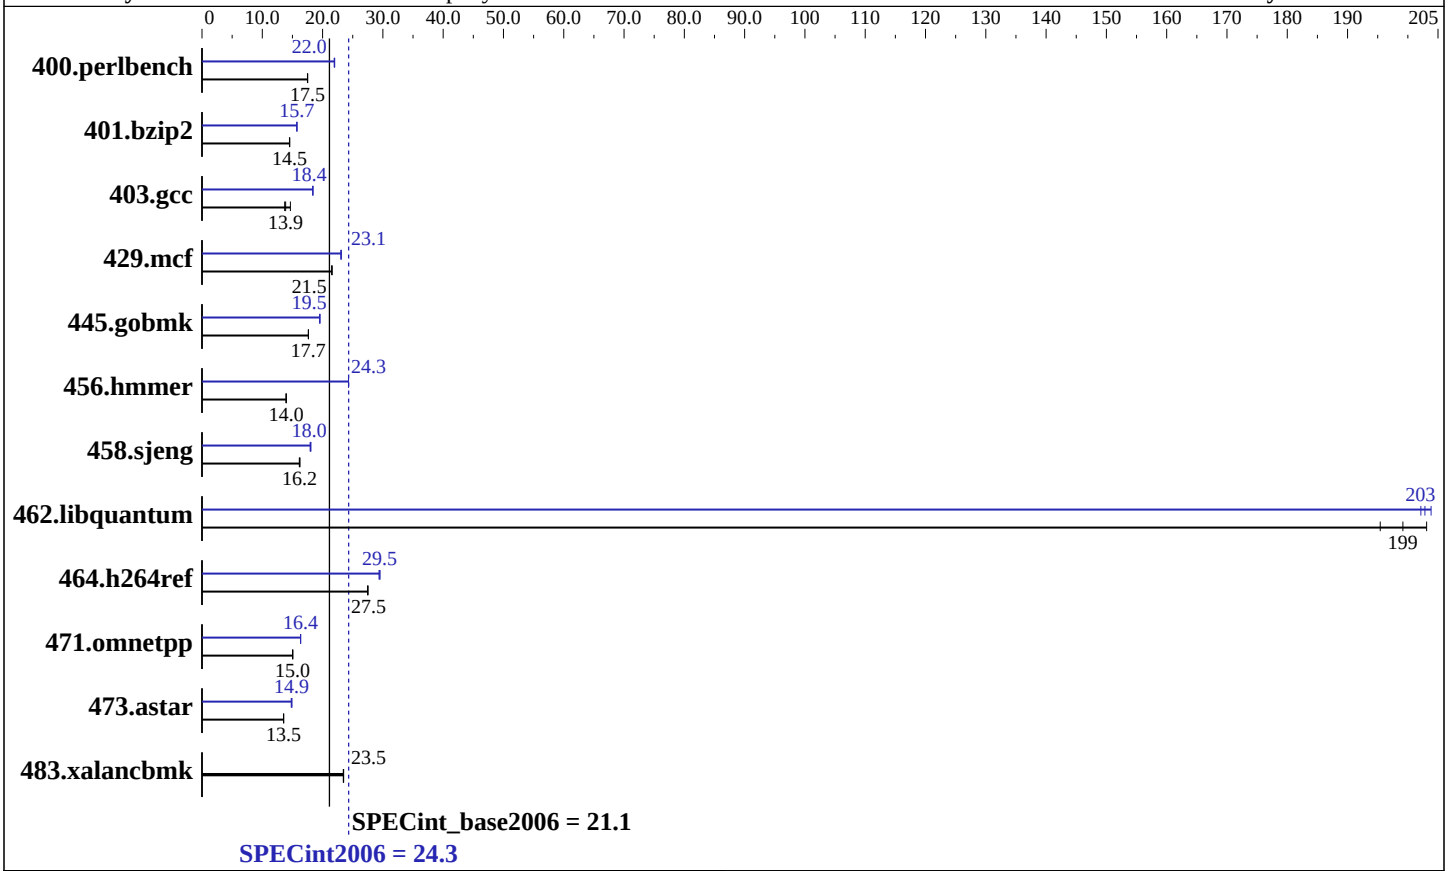

Hardware

CPU Name:	Intel Xeon E5430
CPU Characteristics:	2.66 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem:	1x72 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 binutils-2.17.50

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(2.66 GHz, Intel Xeon E5430)

SPECint2006 = 24.3

SPECint_base2006 = 21.1

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2008
Hardware Availability: Nov-2007
Software Availability: Nov-2007

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**558**	**17.5**	559	17.5	557	17.5	446	21.9	**444**	**22.0**	444	22.0
401.bzip2	**665**	**14.5**	663	14.6	665	14.5	**613**	**15.7**	613	15.8	614	15.7
403.gcc	549	14.7	**580**	**13.9**	587	13.7	438	18.4	438	18.4	**438**	**18.4**
429.mcf	424	21.5	423	21.6	**423**	**21.5**	**395**	**23.1**	395	23.1	396	23.0
445.gobmk	594	17.7	**594**	**17.7**	595	17.6	537	19.5	**537**	**19.5**	536	19.6
456.hmmer	**668**	**14.0**	669	13.9	667	14.0	384	24.3	384	24.3	**384**	**24.3**
458.sjeng	746	16.2	**746**	**16.2**	750	16.1	**673**	**18.0**	670	18.1	675	17.9
462.libquantum	106	195	**104**	**199**	102	203	**102**	**203**	102	204	102	202
464.h264ref	804	27.5	805	27.5	**805**	**27.5**	754	29.4	**751**	**29.5**	750	29.5
471.omnetpp	415	15.0	**415**	**15.0**	416	15.0	**382**	**16.4**	382	16.4	383	16.3
473.astar	518	13.6	**519**	**13.5**	519	13.5	471	14.9	474	14.8	**471**	**14.9**
483.xalancbmk	294	23.5	**294**	**23.5**	294	23.4	294	23.5	**294**	**23.5**	294	23.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to physical,0
 KMP_STACKSIZE set to 64M
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch -auto-ilp32`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/cpu2006/SmartHeap_8.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-int-flags.20090713.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:21:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2008.