SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5440)

SPECint®_rate2006 = 128

SPECint_rate_base2006 = 103

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2008
Hardware Availability: Jun-2008
Software Availability: Nov-2007

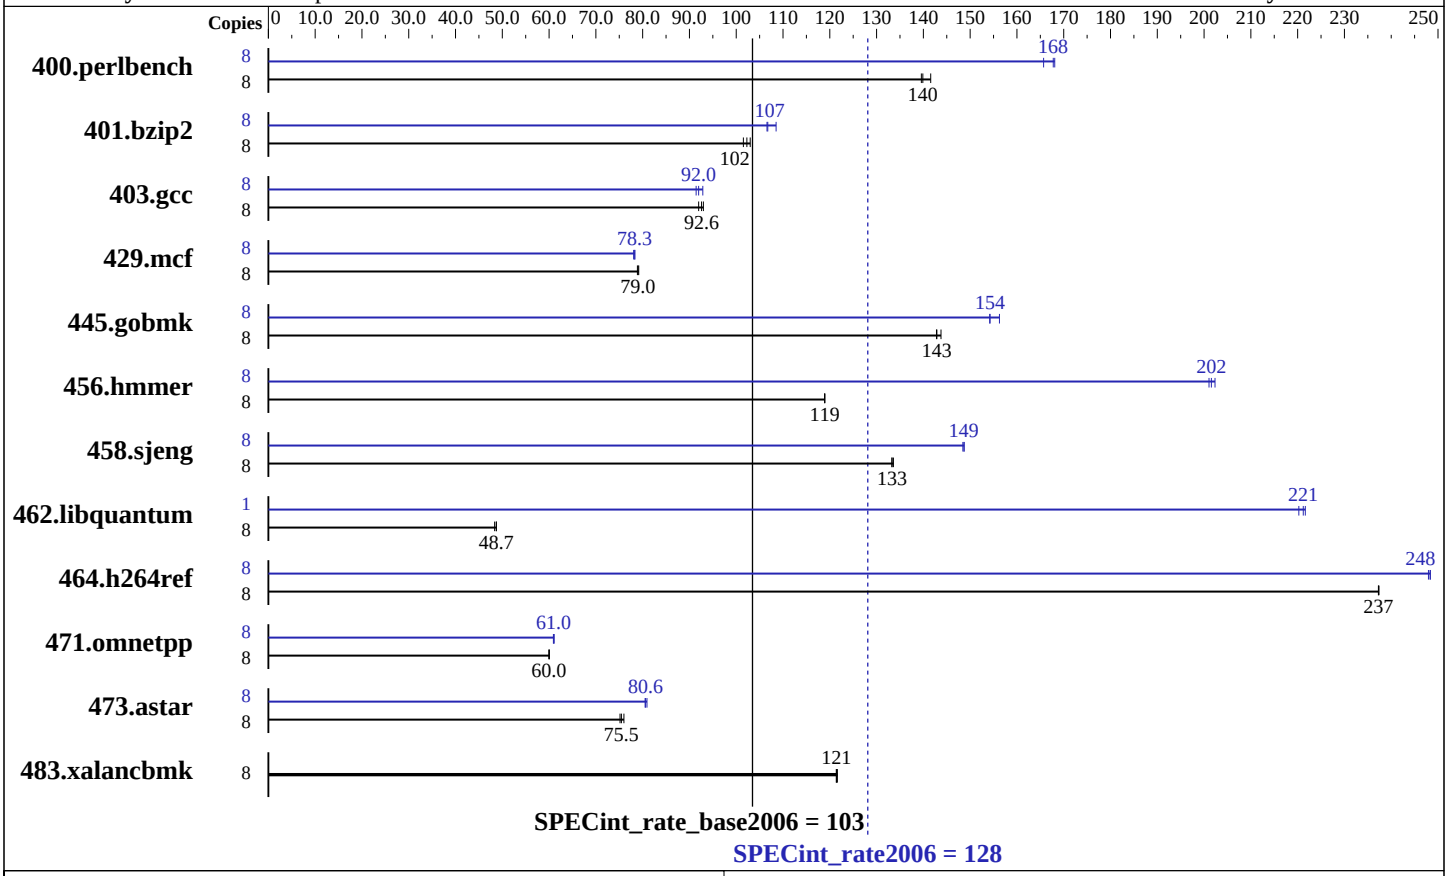

Hardware

CPU Name:	Intel Xeon E5440
CPU Characteristics:	1333MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem:	1 x 160 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x iDataPlex dx340 (Intel Xeon E5440)

SPECint_rate2006 = 128

SPECint_rate_base2006 = 103

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Apr-2008
Hardware Availability: Jun-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	560	140	**559**	**140**	552	142	8	472	166	465	168	**466**	**168**
401.bzip2	8	760	102	**755**	**102**	750	103	8	724	107	**723**	**107**	711	109
403.gcc	8	693	93.0	700	92.0	**696**	**92.6**	8	**700**	**92.0**	694	92.9	704	91.4
429.mcf	8	925	78.9	922	79.2	**923**	**79.0**	8	**932**	**78.3**	931	78.3	935	78.1
445.gobmk	8	584	144	**587**	**143**	588	143	8	537	156	544	154	**544**	**154**
456.hmmer	8	**628**	**119**	628	119	628	119	8	**370**	**202**	369	202	371	201
458.sjeng	8	**726**	**133**	726	133	725	134	8	**651**	**149**	652	148	651	149
462.libquantum	8	3428	48.4	3402	48.7	**3403**	**48.7**	1	**93.7**	**221**	94.1	220	93.5	222
464.h264ref	8	746	237	**746**	**237**	746	237	8	714	248	**713**	**248**	713	248
471.omnetpp	8	834	60.0	833	60.0	**833**	**60.0**	8	**820**	**61.0**	821	60.9	819	61.1
473.astar	8	747	75.2	739	76.0	**744**	**75.5**	8	**697**	**80.6**	694	80.9	697	80.5
483.xalancbmk	8	455	121	454	122	**455**	**121**	8	455	121	454	122	**455**	**121**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090714.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 23 17:47:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.