



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 123

IBM System x3400 (Intel Xeon E5430)

SPECint_rate_base2006 = 100

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

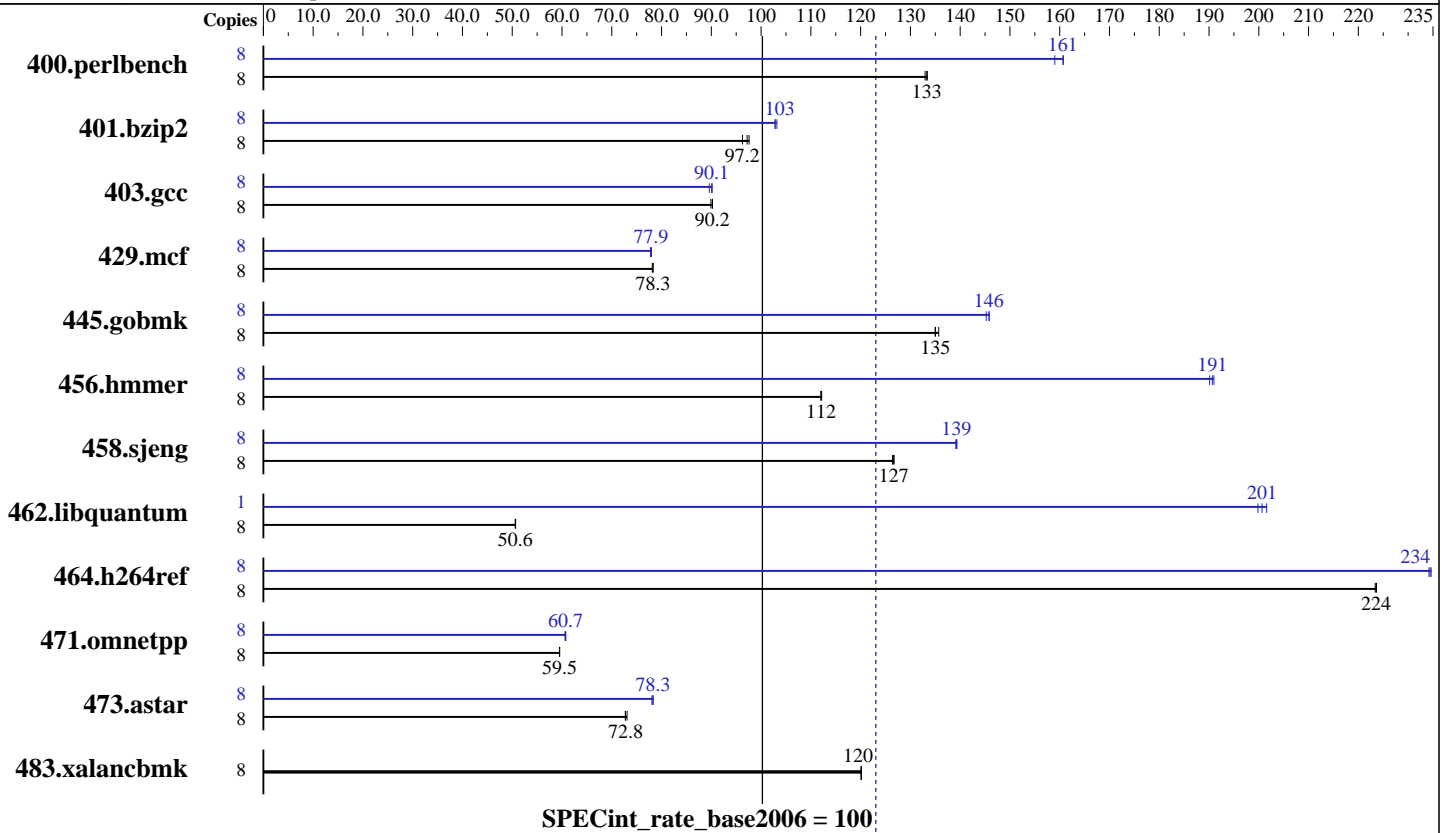

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 80 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), Kernel 2.6.16.21-0.8-smp
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, run level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 123

IBM System x3400 (Intel Xeon E5430)

SPECint_rate_base2006 = 100

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	586	133	586	133	588	133	8	486	161	492	159	487	161
401.bzip2	8	794	97.2	791	97.6	802	96.3	8	751	103	751	103	748	103
403.gcc	8	716	89.9	714	90.2	714	90.2	8	715	90.1	719	89.6	714	90.2
429.mcf	8	934	78.1	932	78.3	932	78.3	8	937	77.9	936	78.0	938	77.8
445.gobmk	8	622	135	621	135	618	136	8	576	146	578	145	575	146
456.hmmmer	8	666	112	665	112	666	112	8	391	191	391	191	393	190
458.sjeng	8	764	127	764	127	766	126	8	696	139	695	139	695	139
462.libquantum	8	3275	50.6	3271	50.7	3274	50.6	1	104	200	103	201	103	202
464.h264ref	8	793	223	792	224	792	224	8	756	234	755	234	755	235
471.omnetpp	8	840	59.5	841	59.5	840	59.5	8	823	60.8	825	60.6	824	60.7
473.astar	8	772	72.8	772	72.7	769	73.1	8	717	78.3	718	78.3	719	78.1
483.xalancbmk	8	460	120	459	120	460	120	8	460	120	459	120	460	120

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M
taskset utility used to bind CPU(s) to processes
This result is measured on an IBM System x 3500 Server. Note that the IBM System x 3500 and IBM System x 3400 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 123

IBM System x3400 (Intel Xeon E5430)

SPECint_rate_base2006 = 100

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 123

IBM System x3400 (Intel Xeon E5430)

SPECint_rate_base2006 = 100

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 123

IBM System x3400 (Intel Xeon E5430)

SPECint_rate_base2006 = 100

CPU2006 license: 11

Test date: Apr-2008

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:20:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 May 2008.