SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2350)

SPECint®_rate2006 = 91.9

SPECint_rate_base2006 = 80.0

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

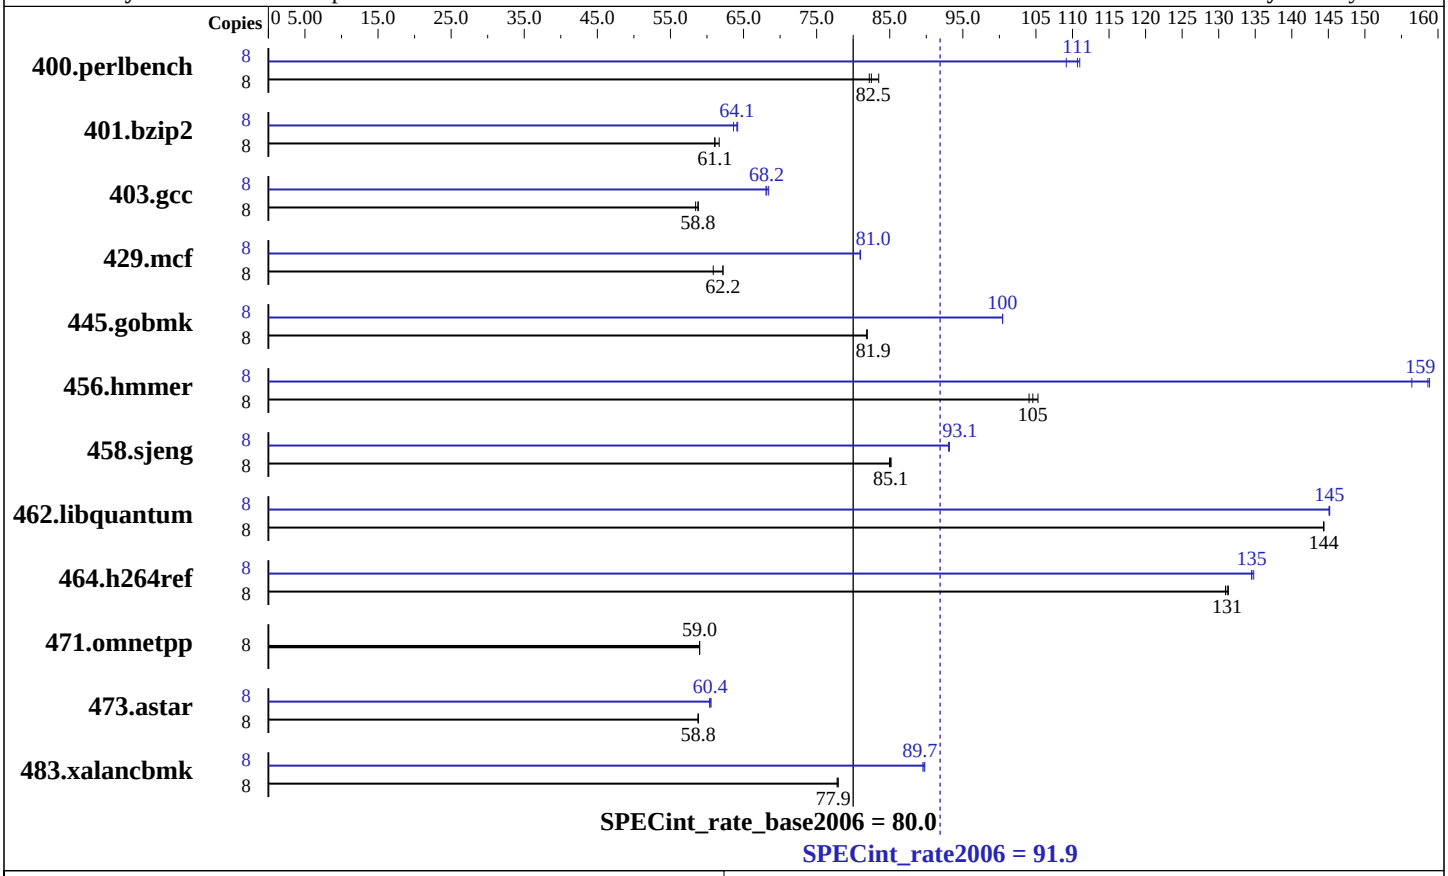

Hardware

CPU Name:	AMD Opteron 2350
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1x160GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2350)

SPECint_rate2006 = 91.9

SPECint_rate_base2006 = 80.0

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	936	83.5	**948**	**82.5**	951	82.2	8	716	109	**706**	**111**	704	111
401.bzip2	8	1252	61.7	**1264**	**61.1**	1265	61.1	8	1213	63.6	1203	64.2	**1205**	**64.1**
403.gcc	8	1102	58.4	1095	58.8	**1096**	**58.8**	8	941	68.4	946	68.1	**945**	**68.2**
429.mcf	8	1199	60.9	1173	62.2	**1173**	**62.2**	8	901	81.0	**901**	**81.0**	901	81.0
445.gobmk	8	1025	81.9	1025	81.9	**1025**	**81.9**	8	836	100	**836**	**100**	835	100
456.hmmer	8	**714**	**105**	709	105	717	104	8	477	156	470	159	**471**	**159**
458.sjeng	8	**1137**	**85.1**	1136	85.2	1139	85.0	8	1039	93.2	1040	93.1	**1040**	**93.1**
462.libquantum	8	1148	144	**1148**	**144**	1148	144	8	1142	145	1142	145	**1142**	**145**
464.h264ref	8	1348	131	**1350**	**131**	1352	131	8	1316	134	1313	135	**1316**	**135**
471.omnetpp	8	**848**	**59.0**	848	59.0	847	59.0	8	**848**	**59.0**	848	59.0	847	59.0
473.astar	8	**955**	**58.8**	955	58.8	955	58.8	8	931	60.4	927	60.6	**929**	**60.4**
483.xalancbmk	8	708	77.9	710	77.8	**708**	**77.9**	8	617	89.5	615	89.8	**615**	**89.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=150 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w -Mipa=jobs:4`

C++ benchmarks:
`-w -Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

471.omnetpp: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:46:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 June 2008.