SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2356)

SPECint®_rate2006 = 51.4

SPECint_rate_base2006 = 44.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2008
Hardware Availability: Mar-2008
Software Availability: May-2008

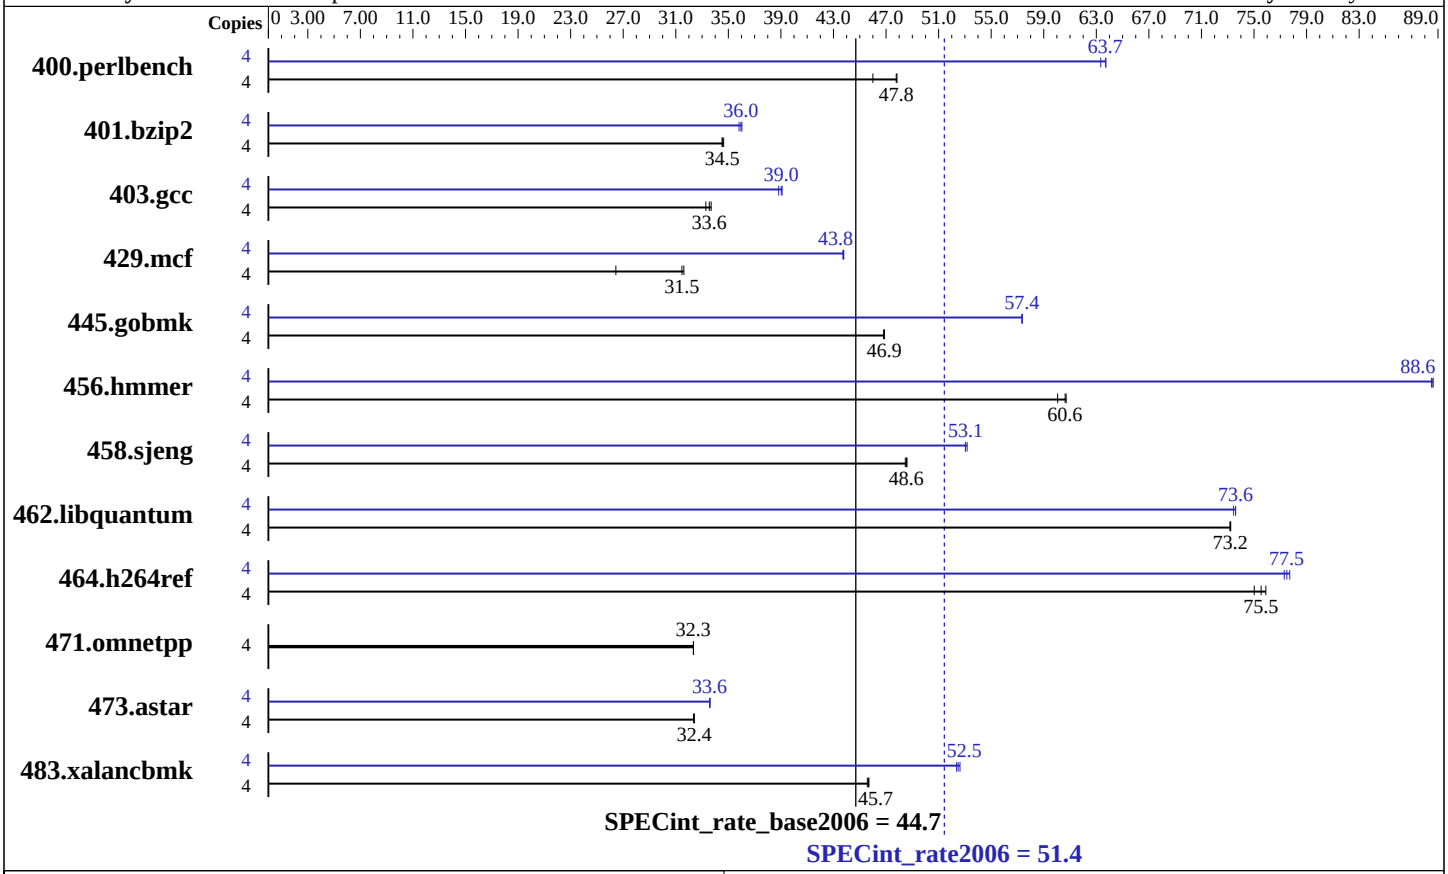

Hardware

CPU Name:	AMD Opteron 2356
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (4x2GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1x160GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos G5450 (AMD Opteron 2356)

SPECint_rate2006 = 51.4

SPECint_rate_base2006 = 44.7

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2008
Hardware Availability: Mar-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	850	46.0	817	47.8	**818**	**47.8**	4	617	63.3	613	63.7	**614**	**63.7**
401.bzip2	4	1114	34.6	1118	34.5	**1117**	**34.5**	4	1078	35.8	**1073**	**36.0**	1071	36.0
403.gcc	4	956	33.7	**960**	**33.6**	967	33.3	4	**825**	**39.0**	829	38.8	824	39.1
429.mcf	4	1380	26.4	1154	31.6	**1159**	**31.5**	4	835	43.7	833	43.8	**833**	**43.8**
445.gobmk	4	895	46.9	**895**	**46.9**	896	46.8	4	731	57.4	**732**	**57.4**	732	57.3
456.hmmer	4	615	60.7	**616**	**60.6**	621	60.1	4	422	88.5	**421**	**88.6**	421	88.6
458.sjeng	4	996	48.6	**997**	**48.6**	999	48.5	4	913	53.0	910	53.2	**912**	**53.1**
462.libquantum	4	1132	73.2	1133	73.2	**1132**	**73.2**	4	1126	73.6	**1126**	**73.6**	1128	73.4
464.h264ref	4	1180	75.0	**1172**	**75.5**	1166	75.9	4	1145	77.3	**1142**	**77.5**	1139	77.7
471.omnetpp	4	773	32.3	**773**	**32.3**	773	32.3	4	773	32.3	**773**	**32.3**	773	32.3
473.astar	4	868	32.4	**867**	**32.4**	867	32.4	4	**836**	**33.6**	835	33.6	837	33.6
483.xalancbmk	4	604	45.7	606	45.6	**605**	**45.7**	4	527	52.4	**526**	**52.5**	524	52.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 1228800' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):
pathCC

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:38:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 June 2008.