SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint®_rate2006 = 78.3

SPECint_rate_base2006 = 67.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jun-2008
Software Availability: Jun-2008

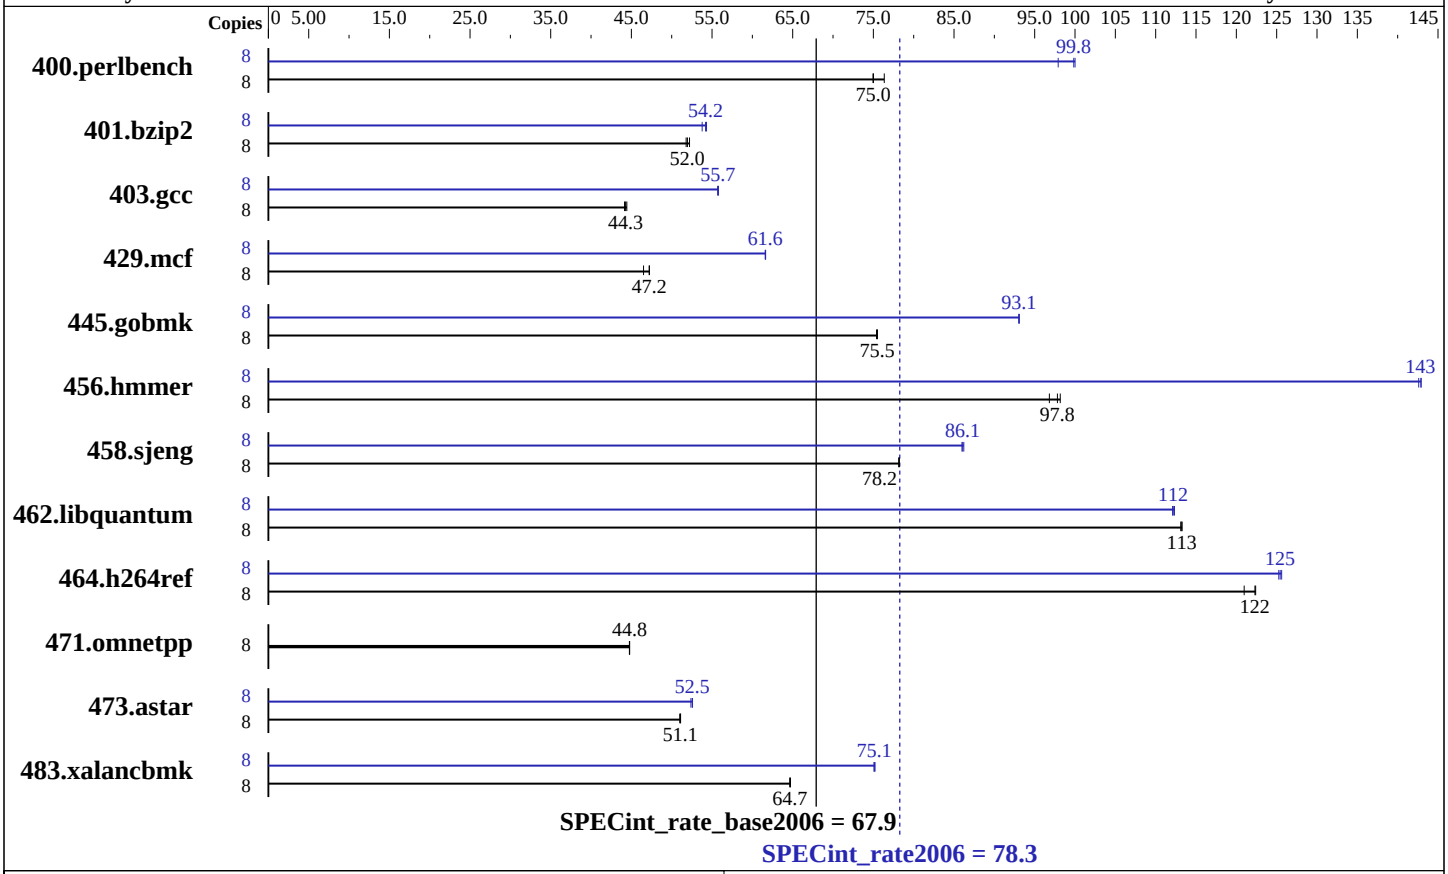

Hardware

CPU Name:	AMD Opteron 2347 HE
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (8 x 2GB, DDR2-667 CL5)
Disk Subsystem:	1 x 73GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge SC1435 (AMD Opteron 2347 HE, 1.9 GHz)

SPECint_rate2006 = 78.3

SPECint_rate_base2006 = 67.9

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2008
Hardware Availability: Jun-2008
Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1024	76.4	**1042**	**75.0**	1043	75.0	8	798	97.9	782	100	**783**	**99.8**
401.bzip2	8	1479	52.2	1491	51.8	**1486**	**52.0**	8	1436	53.8	1421	54.3	**1424**	**54.2**
403.gcc	8	1449	44.4	**1454**	**44.3**	1459	44.2	8	1156	55.7	1154	55.8	**1155**	**55.7**
429.mcf	8	1569	46.5	1544	47.2	**1546**	**47.2**	8	**1184**	**61.6**	1184	61.6	1184	61.6
445.gobmk	8	**1112**	**75.5**	1113	75.4	1112	75.5	8	902	93.0	**902**	**93.1**	902	93.1
456.hmmer	8	771	96.8	760	98.2	**763**	**97.8**	8	**522**	**143**	522	143	523	143
458.sjeng	8	**1238**	**78.2**	1239	78.2	1238	78.2	8	**1125**	**86.1**	1126	86.0	1123	86.2
462.libquantum	8	1466	113	1463	113	**1464**	**113**	8	1479	112	1476	112	**1478**	**112**
464.h264ref	8	1463	121	**1448**	**122**	1446	122	8	1409	126	1413	125	**1411**	**125**
471.omnetpp	8	**1117**	**44.8**	1116	44.8	1117	44.8	8	**1117**	**44.8**	1116	44.8	1117	44.8
473.astar	8	1099	51.1	**1100**	**51.1**	1101	51.0	8	1072	52.4	**1069**	**52.5**	1068	52.6
483.xalancbmk	8	853	64.7	**854**	**64.7**	854	64.7	8	**735**	**75.1**	734	75.2	735	75.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit
mount -t hugetlbfs nodev /mnt/hugepages
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

Base Compiler Invocation

C benchmarks:
`pgcc`

C++ benchmarks:
`pgcpp`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`

Continued on next page

Base Portability Flags (Continued)

458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:
`-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150 --zc_eh -tp barcelona -Bstatic_pgi`

Base Other Flags

C benchmarks:
`-w -Mipa=jobs:4`

C++ benchmarks:
`-w -Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks (except as noted below):
`pgcc`

400.perlbench: `pathcc`

403.gcc: `pathcc`

445.gobmk: `pathcc`

C++ benchmarks (except as noted below):
`pathCC`

471.omnetpp: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap

Peak Other Flags

C benchmarks (except as noted below):
-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):
-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:25:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 August 2008.