SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M2 (Intel Xeon X3360)

SPECint®_rate2006 = 73.6

SPECint_rate_base2006 = 63.7

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2007

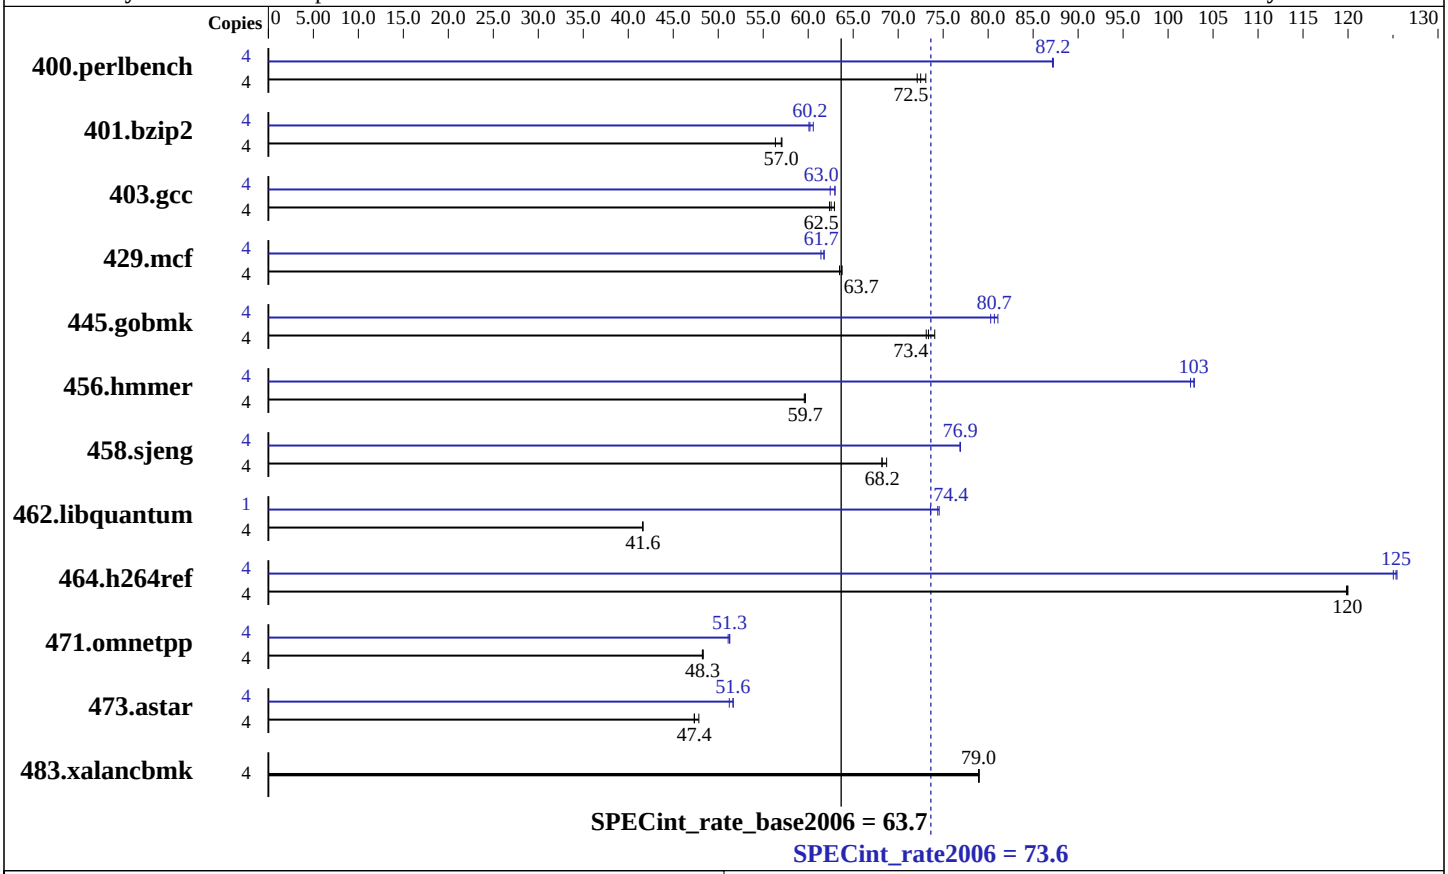

Hardware

CPU Name:	Intel Xeon X3360
CPU Characteristics:	1333MHz system bus
CPU MHz:	2833
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4 x 2 GB DDR2-6400E ECC)
Disk Subsystem:	1 x 160 GB SATA, 7200RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M2 (Intel Xeon X3360)

SPECint_rate2006 = 73.6

SPECint_rate_base2006 = 63.7

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	542	72.1	535	73.1	**539**	**72.5**	4	448	87.1	**448**	**87.2**	448	87.2
401.bzip2	4	**677**	**57.0**	685	56.4	676	57.1	4	**641**	**60.2**	642	60.1	637	60.6
403.gcc	4	**515**	**62.5**	516	62.4	512	62.9	4	**511**	**63.0**	511	63.0	516	62.4
429.mcf	4	572	63.8	**573**	**63.7**	575	63.5	4	591	61.8	**591**	**61.7**	594	61.4
445.gobmk	4	574	73.1	567	74.1	**572**	**73.4**	4	**520**	**80.7**	517	81.1	523	80.3
456.hmmer	4	**625**	**59.7**	627	59.6	625	59.7	4	364	102	363	103	**363**	**103**
458.sjeng	4	**709**	**68.2**	710	68.2	704	68.7	4	630	76.9	629	76.9	**629**	**76.9**
462.libquantum	4	**1991**	**41.6**	1992	41.6	1991	41.6	1	278	74.6	**279**	**74.4**	282	73.6
464.h264ref	4	**738**	**120**	739	120	738	120	4	708	125	**706**	**125**	706	125
471.omnetpp	4	518	48.2	517	48.3	**518**	**48.3**	4	489	51.1	488	51.3	**488**	**51.3**
473.astar	4	587	47.8	**593**	**47.4**	593	47.3	4	548	51.2	**544**	**51.6**	543	51.7
483.xalancbmk	4	349	79.0	**350**	**79.0**	350	78.9	4	349	79.0	**350**	**79.0**	350	78.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,
for peak, are compiled in 64-bit mode
Hardware Sector Prefetch Disabled and Adjacent Sector Prefetch Disabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to null
taskset utility used to bind CPU(s) to processes
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-fast -inline-calloc -opt-malloc-options=3
```

C++ benchmarks:
```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc
```

401.bzip2:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

456.hmmer:
```
/opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include
```

C++ benchmarks:
```
icpc
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -ansi-alias -prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -prefetch`

403.gcc: `-fast -inline-calloc -opt-malloc-options=3`

429.mcf: `-fast -prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-fast -unroll2 -ansi-alias -opt-multi-version-aggressive`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll4`

462.libquantum: `-fast -unroll4 -Ob0 -prefetch -opt-streaming-stores always -vec-guard-write -opt-malloc-options=3 -parallel -par-runtime-control`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-fast -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xT -O3 -ipo -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revC.20090713.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:16:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.