SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECint®_rate2006 = 87.8

SPECint_rate_base2006 = 76.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: May-2008

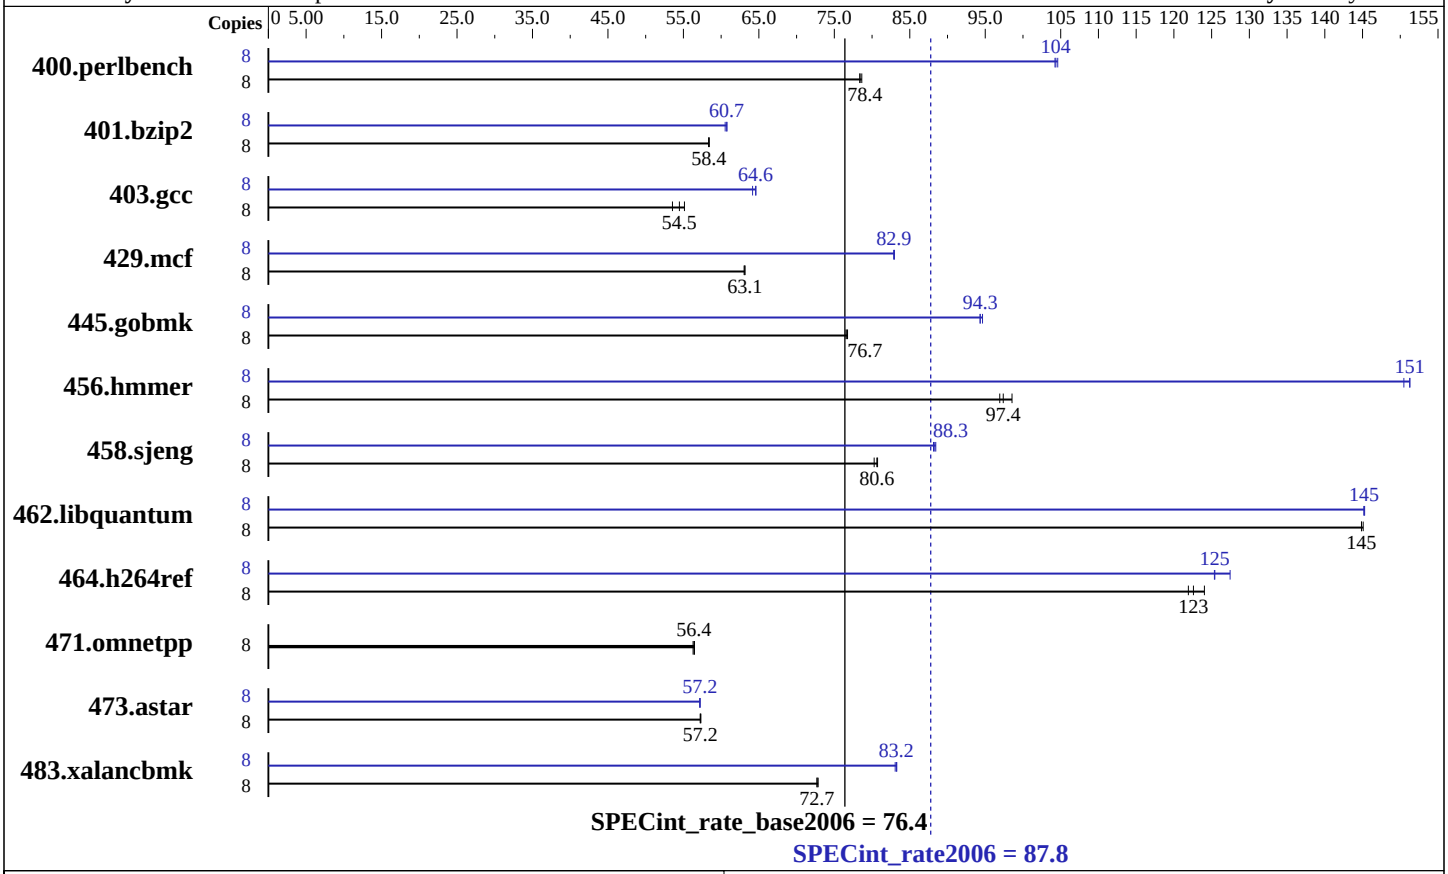

Hardware

CPU Name:	AMD Opteron 2347 HE
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-6400 ECC)
Disk Subsystem:	1 x 73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
Auto Parallel:	No
File System:	ext2
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS22 (AMD Opteron 2347 HE)

SPECint_rate2006 = 87.8

SPECint_rate_base2006 = 76.4

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2008
Hardware Availability: Sep-2008
Software Availability: May-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**997**	**78.4**	997	78.4	994	78.6	8	747	105	**749**	**104**	750	104
401.bzip2	8	1323	58.3	1322	58.4	**1322**	**58.4**	8	1275	60.5	1270	60.8	**1271**	**60.7**
403.gcc	8	**1182**	**54.5**	1168	55.1	1203	53.5	8	**997**	**64.6**	1004	64.2	997	64.6
429.mcf	8	1157	63.0	1155	63.1	**1155**	**63.1**	8	**880**	**82.9**	880	82.9	879	83.0
445.gobmk	8	1096	76.6	**1095**	**76.7**	1093	76.8	8	887	94.6	**890**	**94.3**	890	94.3
456.hmmer	8	770	96.9	**766**	**97.4**	757	98.5	8	493	151	**493**	**151**	496	150
458.sjeng	8	1199	80.7	1206	80.3	**1200**	**80.6**	8	**1096**	**88.3**	1098	88.1	1094	88.4
462.libquantum	8	**1144**	**145**	1144	145	1142	145	8	1141	145	**1142**	**145**	1142	145
464.h264ref	8	1452	122	1427	124	**1444**	**123**	8	1389	127	1412	125	**1412**	**125**
471.omnetpp	8	885	56.5	888	56.3	**886**	**56.4**	8	885	56.5	888	56.3	**886**	**56.4**
473.astar	8	980	57.3	981	57.2	**981**	**57.2**	8	982	57.2	**982**	**57.2**	982	57.2
483.xalancbmk	8	758	72.9	**759**	**72.7**	759	72.7	8	663	83.3	665	83.1	**663**	**83.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600'  was used to set environment locked pages in memory limit
Environment variable PGI_HUGE_PAGES set to 896
Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -tp barcelona -Bstatic_pgi

Base Other Flags

C benchmarks:
-w -Mipa=jobs:4

C++ benchmarks:
-w -Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):
pathCC

471.omnetpp: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
-Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
-Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
-tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
-CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed
-Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
-Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
-Msmartalloc=huge:150 -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -Ofast -TENV:frame_pointer=off -WOPT:if_conv=0 -GRA:optimize_boundary=on -IPA:plimit=525 -m32 -lsmartheap`

483.xalancbmk: `-march=barcelona -Ofast -m32 -OPT:unroll_times_max=8 -CG:push_pop_int_saved_regs=off -CG:ptr_load_use=0 -lsmartheap`

Peak Other Flags

C benchmarks (except as noted below):
`-w -Mipa=jobs:4`(pass 2)

400.perlbench: `No flags used`

401.bzip2: `-w`

403.gcc: `No flags used`

445.gobmk: `No flags used`

C++ benchmarks (except as noted below):
`-L/root/work/cpu2006/amd123GH.libs/32`

471.omnetpp: `-w -Mipa=jobs:4`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.01.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.01.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 19:07:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.