SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(3.33 GHz, Intel Xeon X5470)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 139

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

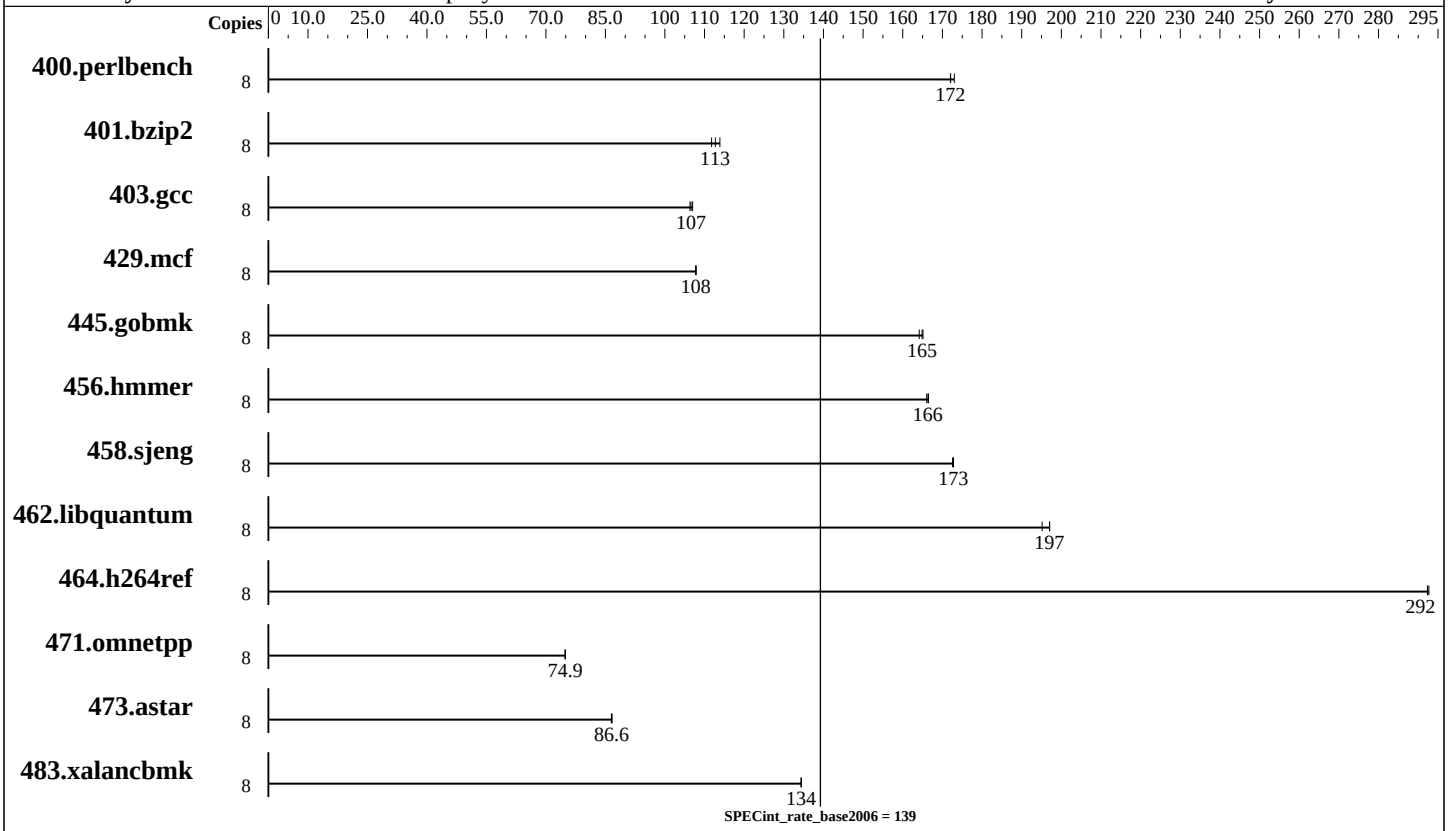

Hardware

CPU Name:	Intel Xeon X5470
CPU Characteristics:	3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem:	2x72 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c
(3.33 GHz, Intel Xeon X5470)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 139

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	452	173	**454**	**172**	454	172							
401.bzip2	8	678	114	**685**	**113**	691	112							
403.gcc	8	602	107	606	106	**604**	**107**							
429.mcf	8	**677**	**108**	677	108	677	108							
445.gobmk	8	508	165	511	164	**509**	**165**							
456.hmmer	8	**449**	**166**	450	166	448	167							
458.sjeng	8	560	173	**560**	**173**	561	173							
462.libquantum	8	**841**	**197**	849	195	841	197							
464.h264ref	8	605	293	606	292	**605**	**292**							
471.omnetpp	8	668	74.9	668	74.9	**668**	**74.9**							
473.astar	8	648	86.7	649	86.5	**648**	**86.6**							
483.xalancbmk	8	411	134	411	134	**411**	**134**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 taskset was used to bind processes to cores except
 for 462.libquantum peak
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
  Adjacent Sector Prefetch Disabled
  Hardware Prefetcher Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:
`-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.html
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.01.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.00.xml
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.01.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:14:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 October 2008.