SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Lenovo SureServer R630 G7 (Intel Xeon L7455)

SPECfp®2006 = 19.8

SPECfp_base2006 = 18.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

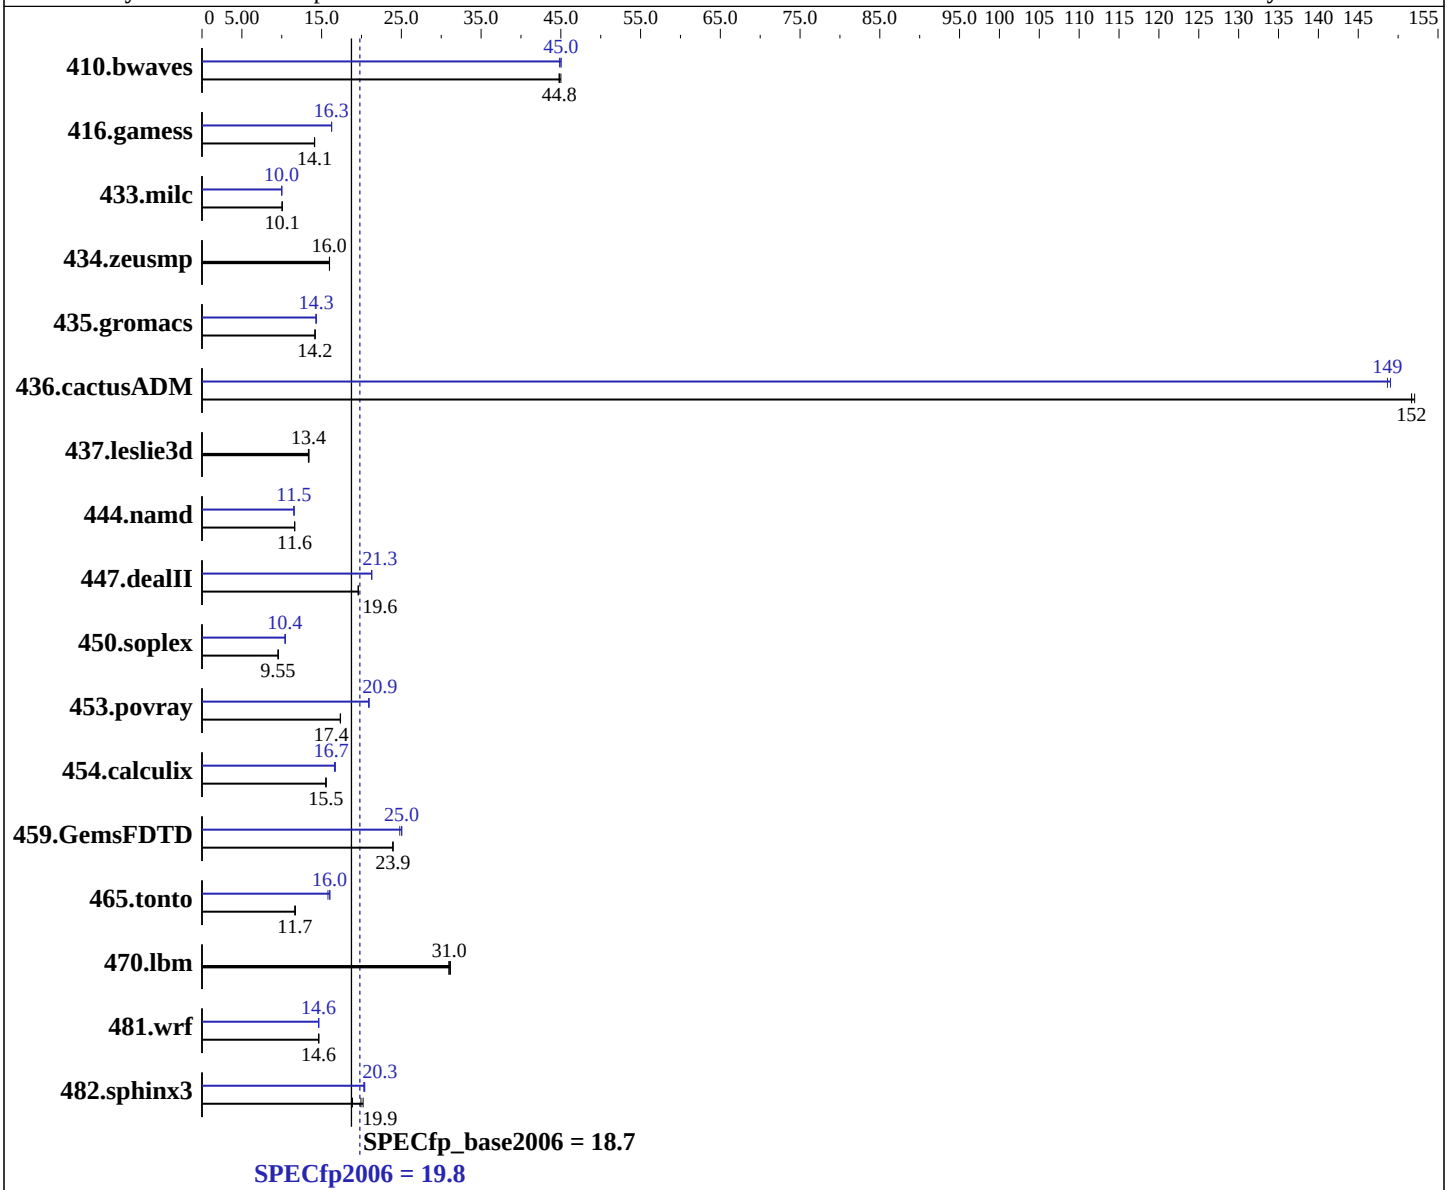

Hardware

CPU Name:	Intel Xeon L7455
CPU Characteristics:	
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	9 MB I+D on chip per chip, 3 MB shared / 2 cores

Continued on next page

Software

Operating System:	SuSe Linux SLES10 SP2
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cc_b_11.0.042, l_fc_b_11.0.042
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Lenovo SureServer R630 G7 (Intel Xeon L7455)

SPECfp2006 = 19.8

SPECfp_base2006 = 18.7

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Sep-2008
Hardware Availability: Sep-2008
Software Availability: Nov-2008

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB(16 x2 GB Micron DDR2 5300F, CL5-5-5, ECC)
Disk Subsystem: 73 GB Seagate SAS, 10K RPM
Other Hardware: None

Other Software: Microquill SmartHeap V8.1
Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	302	45.0	303	44.8	**303**	**44.8**	302	45.0	303	44.8	**302**	**45.0**
416.gamess	1386	14.1	**1387**	**14.1**	1389	14.1	1204	16.3	**1205**	**16.3**	1206	16.2
433.milc	912	10.1	**913**	**10.1**	913	10.1	918	10.0	**918**	**10.0**	918	10.0
434.zeusmp	569	16.0	570	16.0	**569**	**16.0**	569	16.0	570	16.0	**569**	**16.0**
435.gromacs	503	14.2	504	14.2	**504**	**14.2**	498	14.3	500	14.3	**498**	**14.3**
436.cactusADM	78.6	152	78.8	152	**78.8**	**152**	**80.4**	**149**	80.4	149	80.2	149
437.leslie3d	701	13.4	705	13.3	**702**	**13.4**	701	13.4	705	13.3	**702**	**13.4**
444.namd	690	11.6	691	11.6	**690**	**11.6**	696	11.5	695	11.5	**695**	**11.5**
447.dealII	**584**	**19.6**	584	19.6	584	19.6	538	21.3	**538**	**21.3**	538	21.3
450.soplex	870	9.58	**874**	**9.55**	875	9.53	798	10.4	**800**	**10.4**	801	10.4
453.povray	306	17.4	**306**	**17.4**	307	17.3	254	20.9	254	20.9	**254**	**20.9**
454.calculix	530	15.6	531	15.5	**531**	**15.5**	493	16.7	497	16.6	**495**	**16.7**
459.GemsFDTD	443	23.9	443	24.0	**443**	**23.9**	**424**	**25.0**	428	24.8	424	25.0
465.tonto	840	11.7	845	11.6	**844**	**11.7**	613	16.0	**614**	**16.0**	623	15.8
470.lbm	444	31.0	**443**	**31.0**	441	31.2	444	31.0	**443**	**31.0**	441	31.2
481.wrf	**763**	**14.6**	762	14.7	764	14.6	764	14.6	**763**	**14.6**	763	14.6
482.sphinx3	1033	18.9	**978**	**19.9**	965	20.2	959	20.3	**959**	**20.3**	955	20.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
All benchmarks compiled in 64-bit mode except 450.soplex
and 482.sphinx3, at peak, are compiled in 32-bit mode
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetcher: Enabled
High Bandwidth Option: Disabled
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):
icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

Continued on next page

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.16.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.16.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:08:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2008.