SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P5730, Intel Core 2 Duo E7300 processor

SPECint®_rate2006 = 32.4

SPECint_rate_base2006 = 29.6

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2008
Hardware Availability: Jul-2008
Software Availability: Feb-2008

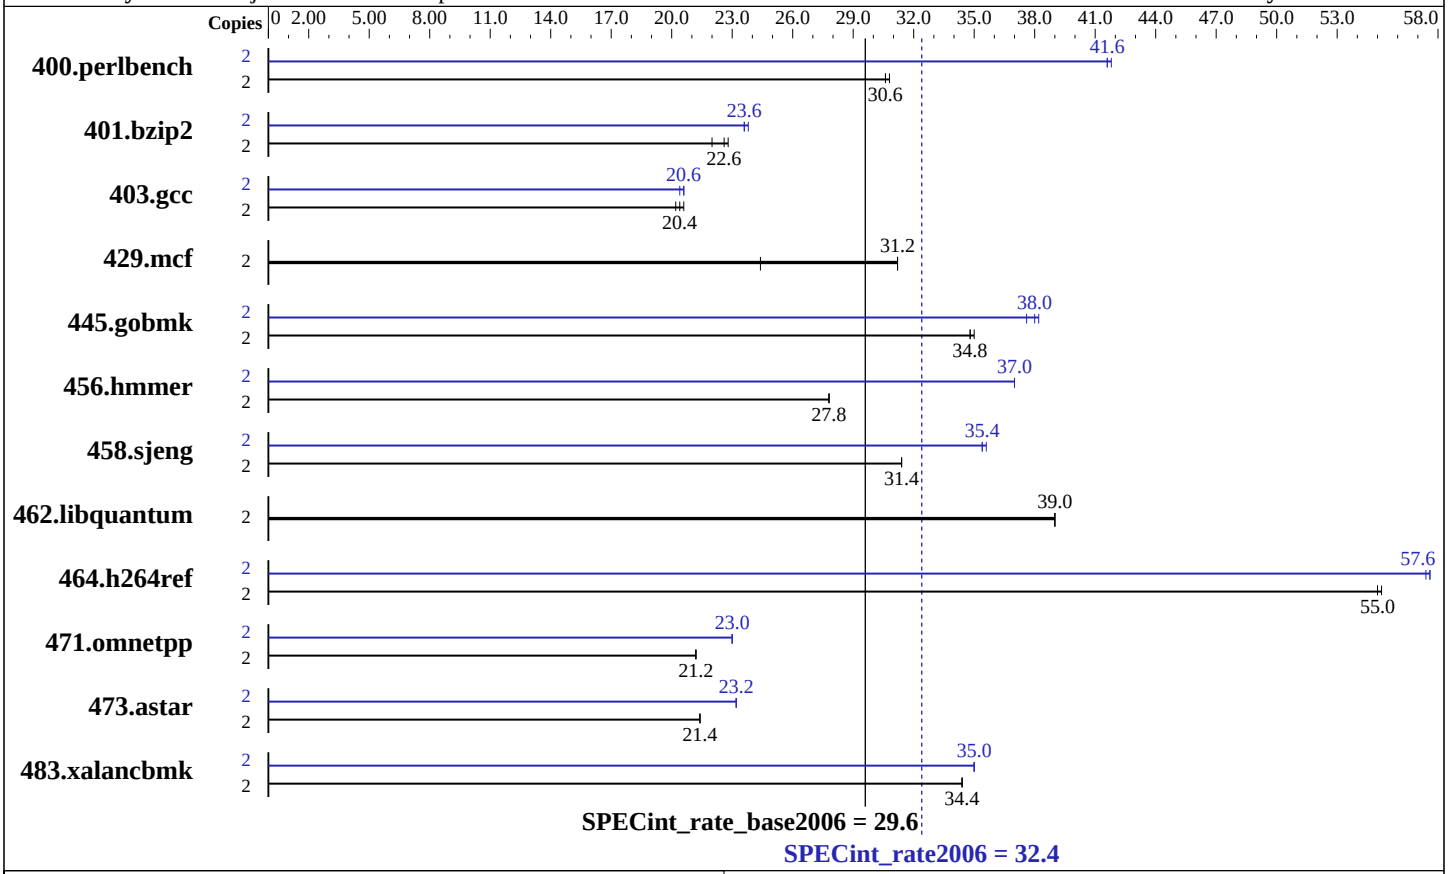

Hardware

CPU Name:	Intel Core 2 Duo E7300
CPU Characteristics:	
CPU MHz:	2666
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	3 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	2 GB (2x1 GB PC2-6400U-666-12 SDRAM)
Disk Subsystem:	1 x 250 GB SATA, 8 MB, 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows XP Professional x64 Edition SP2
Compiler:	Intel C++ Compiler for applications running on IA-32, Version 10.1, Build 20080212 Intel C++ Compiler for applications running on Intel 64, Version 10.1, Build 20080212 Microsoft Visual Studio 2005 with SP1 (for libraries)
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 9 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

ESPRIMO P5730, Intel Core 2 Duo E7300 processor

SPECint_rate2006 = 32.4

SPECint_rate_base2006 = 29.6

CPU2006 license: 22
Test sponsor: Fujitsu Siemens Computers
Tested by: Fujitsu Siemens Computers

Test date: Nov-2008
Hardware Availability: Jul-2008
Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	635	30.8	**637**	**30.6**	637	30.6	2	470	41.6	**469**	**41.6**	468	41.8
401.bzip2	2	880	22.0	**855**	**22.6**	850	22.8	2	**815**	**23.6**	810	23.8	818	23.6
403.gcc	2	780	20.6	**792**	**20.4**	797	20.2	2	**783**	**20.6**	791	20.4	782	20.6
429.mcf	2	746	24.4	584	31.2	**584**	**31.2**	2	746	24.4	584	31.2	**584**	**31.2**
445.gobmk	2	601	35.0	**602**	**34.8**	604	34.8	2	550	38.2	**552**	**38.0**	557	37.6
456.hmmer	2	**672**	**27.8**	672	27.8	672	27.8	2	505	37.0	504	37.0	**504**	**37.0**
458.sjeng	2	769	31.4	**769**	**31.4**	769	31.4	2	**682**	**35.4**	682	35.4	681	35.6
462.libquantum	2	1064	39.0	**1062**	**39.0**	1061	39.0	2	1064	39.0	**1062**	**39.0**	1061	39.0
464.h264ref	2	**803**	**55.0**	802	55.2	803	55.0	2	**770**	**57.6**	770	57.4	769	57.6
471.omnetpp	2	588	21.2	**588**	**21.2**	588	21.2	2	**545**	**23.0**	545	23.0	545	23.0
473.astar	2	658	21.4	657	21.4	**658**	**21.4**	2	607	23.2	607	23.2	**607**	**23.2**
483.xalancbmk	2	401	34.4	**401**	**34.4**	401	34.4	2	**395**	**35.0**	395	35.0	395	35.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Screen Saver was disabled
Power scheme was modified to Always On; Turn off monitor: Never; Turn off hard disks: Never
```

Platform Notes

```
BIOS default settings have been used.
```

General Notes

```
For information about Fujitsu Siemens Computers please see:
http://www.fujitsu-siemens.com
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc8 -Qc99
```

C++ benchmarks:

```
icl -Qvc8
```

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:
-fast -Qvec-guard-write -F512000000

C++ benchmarks:
-fast -Qcxx_features -F512000000 shlW32M.lib -link -FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icl -Qvc8 -Qc99

401.bzip2: C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Bin\icl.exe
-IC:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Include
-link -LIBPATH:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Lib
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\PlatformSDK\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib

456.hmmer: C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Bin\icl.exe
-IC:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Include
-link -LIBPATH:C:\DevelTools\Intel\Compiler\C++\10.1.021\EM64T\Lib
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\PlatformSDK\lib\AMD64
-link -LIBPATH:C:\ProgramFiles\MicrosoftVisualStudio8\VC\lib

C++ benchmarks:
icl -Qvc8

Peak Portability Flags

401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_WIN32
456.hmmer: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qprefetch -F512000000 shlW32M.lib -link -FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch -F512000000

403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -F512000000

429.mcf: basepeak = yes

445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo -Qprec-div- -Qansi-alias -F512000000

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias -Qopt-multi-version-aggressive -F512000000

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll4 -F512000000

462.libquantum: basepeak = yes

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll2 -Qansi-alias -F512000000

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=block -Qcxx_features -F512000000 shlW32M.lib -link -FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qopt-ra-region-strategy=routine -Qcxx_features -F512000000 shlW32M.lib -link -FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias -Qcxx_features -F512000000 shlW32M.lib -link -FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090713.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:45:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.