



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECint®\_rate2006 = 133

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

### SPECint\_rate\_base2006 = 111

CPU2006 license: 3


Test date: Nov-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

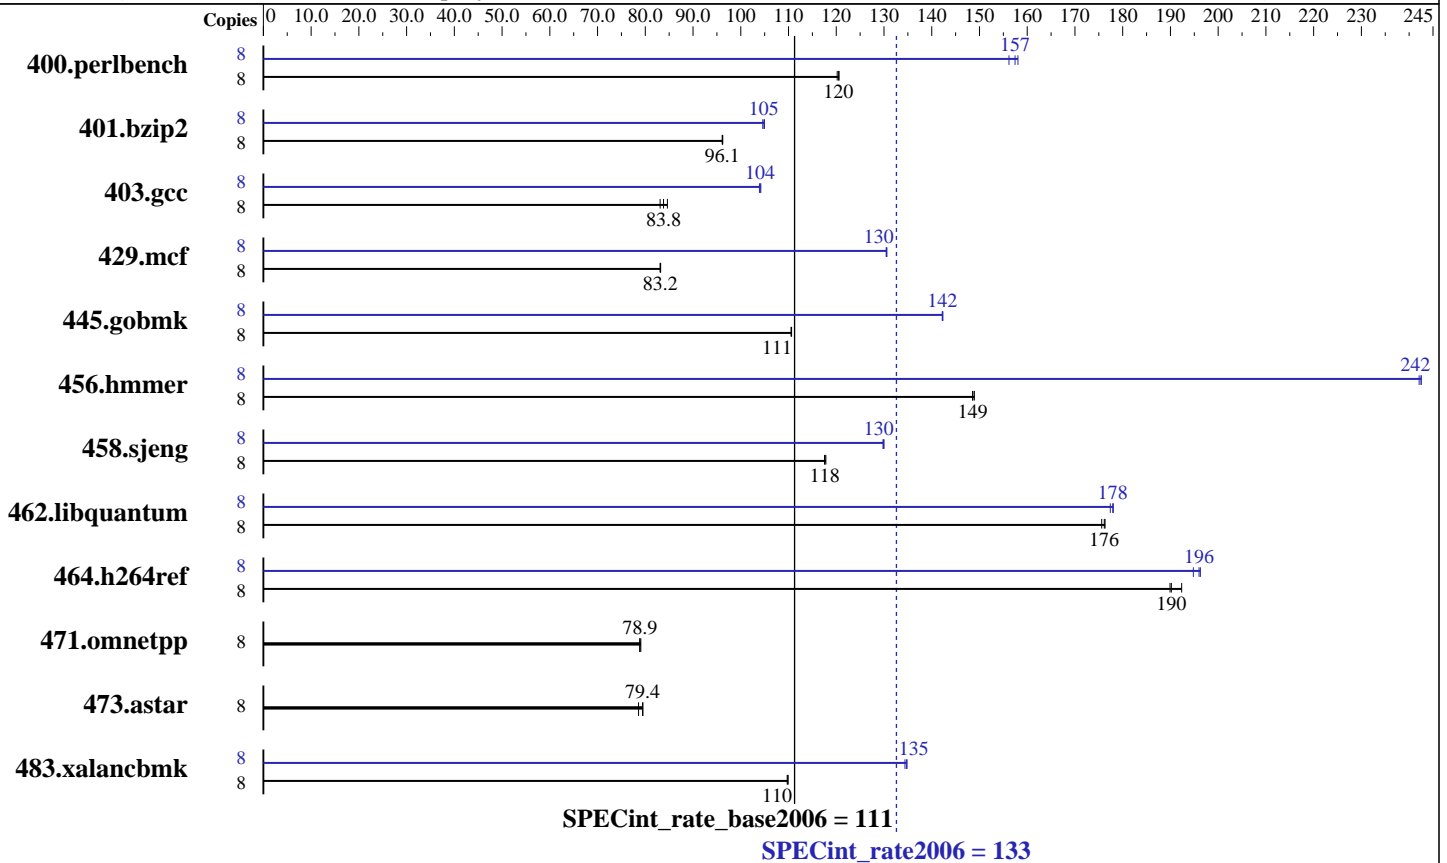

### Hardware

CPU Name: AMD Opteron 2384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
 Disk Subsystem: 1x146 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.17.50  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 133

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

SPECint\_rate\_base2006 = 111

CPU2006 license: 3

Test date: Nov-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	648	121	650	120	<b>649</b>	<b>120</b>	8	<b>496</b>	<b>157</b>	494	158	500	156
401.bzip2	8	802	96.2	<b>803</b>	<b>96.1</b>	803	96.1	8	735	105	738	105	<b>736</b>	<b>105</b>
403.gcc	8	<b>768</b>	<b>83.8</b>	775	83.1	761	84.6	8	618	104	620	104	<b>619</b>	<b>104</b>
429.mcf	8	878	83.1	<b>877</b>	<b>83.2</b>	877	83.2	8	559	130	559	131	<b>559</b>	<b>130</b>
445.gobmk	8	<b>759</b>	<b>111</b>	758	111	759	111	8	590	142	<b>590</b>	<b>142</b>	590	142
456.hammer	8	<b>502</b>	<b>149</b>	502	149	501	149	8	308	242	308	243	<b>308</b>	<b>242</b>
458.sjeng	8	<b>823</b>	<b>118</b>	824	118	822	118	8	<b>745</b>	<b>130</b>	745	130	746	130
462.libquantum	8	944	176	<b>941</b>	<b>176</b>	940	176	8	<b>932</b>	<b>178</b>	931	178	934	177
464.h264ref	8	932	190	<b>931</b>	<b>190</b>	920	192	8	909	195	902	196	<b>903</b>	<b>196</b>
471.omnetpp	8	<b>634</b>	<b>78.9</b>	632	79.1	634	78.8	8	<b>634</b>	<b>78.9</b>	632	79.1	634	78.8
473.astar	8	706	79.5	715	78.6	<b>707</b>	<b>79.4</b>	8	706	79.5	715	78.6	<b>707</b>	<b>79.4</b>
483.xalancbmk	8	502	110	503	110	<b>502</b>	<b>110</b>	8	<b>410</b>	<b>135</b>	411	134	409	135

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.  
NCPUS set to number of cores

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 133

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

SPECint\_rate\_base2006 = 111

CPU2006 license: 3

Test date: Nov-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:  
-Mipa=jobs:4

C++ benchmarks:  
-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc  
  
456.hmmer: pgcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 133

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

SPECint\_rate\_base2006 = 111

CPU2006 license: 3

Test date: Nov-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

## Peak Compiler Invocation (Continued)

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 133

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

SPECint\_rate\_base2006 = 111

CPU2006 license: 3

Test date: Nov-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

445.gobmk (continued):

-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
-LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer:

-Mvect=cachesize:6291456 -fastsse -Mvect=partial  
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

458.sjeng:

-march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
-LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
-LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum:

-Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref:

-march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: basepeak = yes

483.xalancbmk:

-march=barcelona -Ofast -INLINE:aggressive=on -m32  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):

-Mipa=jobs:4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 133**

ProLiant DL185 G5  
(2.7 GHz AMD Opteron 2384)

**SPECint\_rate\_base2006 = 111**

**CPU2006 license:** 3

**Test date:** Nov-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Other Flags (Continued)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:57:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 November 2008.