SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8378, 2.40 GHz)

SPECint®2006 = 18.6

SPECint_base2006 = 15.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Oct-2008

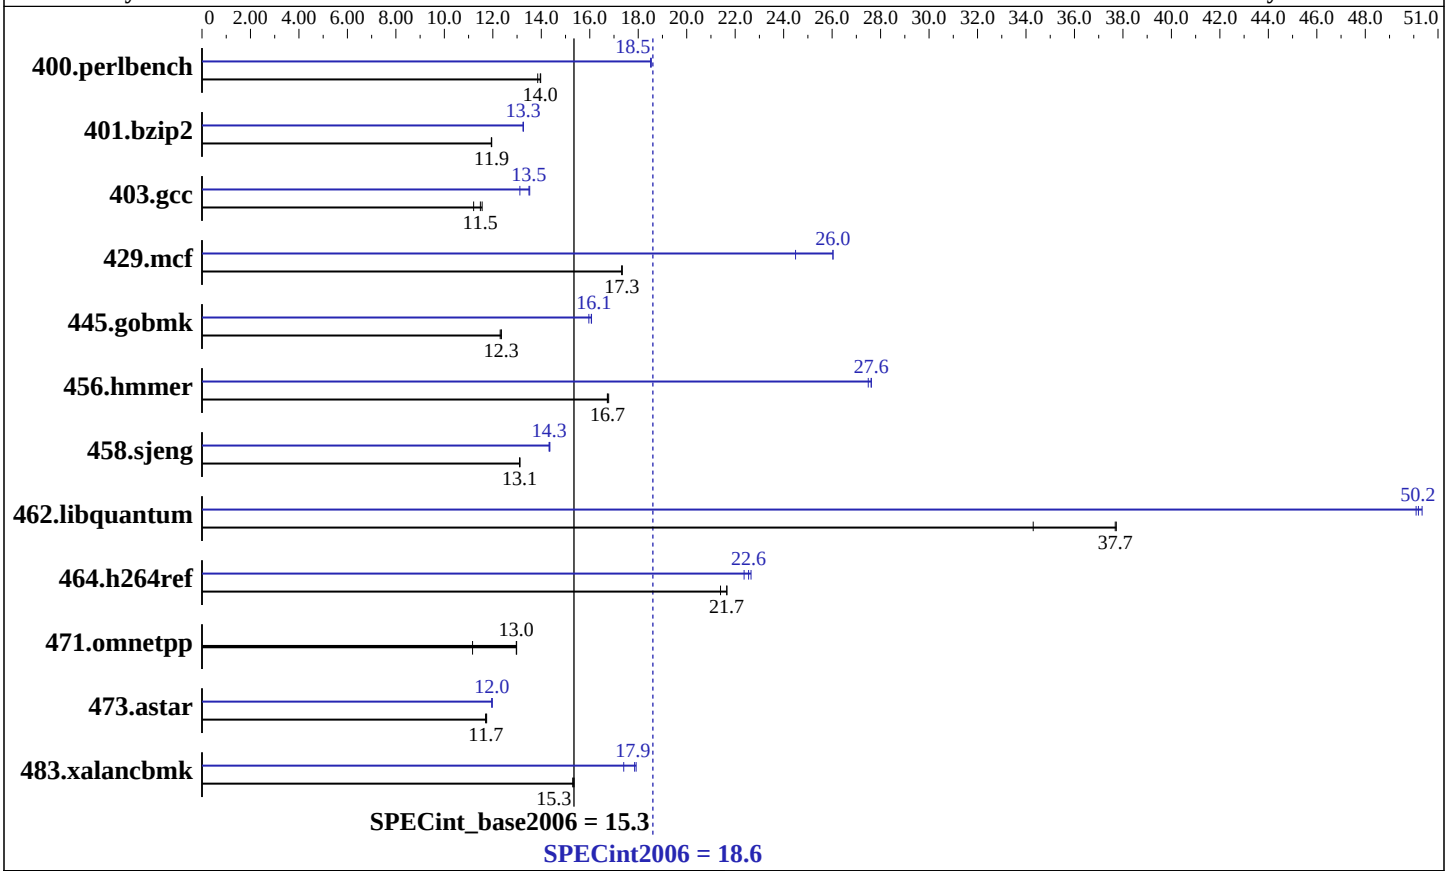

Hardware

CPU Name:	AMD Opteron 8378
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2 Kernel 2.6.16.60-0.21-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M905 (AMD Opteron 8378, 2.40 GHz)

SPECint2006 = 18.6

SPECint_base2006 = 15.3

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	705	13.9	699	14.0	**700**	**14.0**	**528**	**18.5**	527	18.5	528	18.5
401.bzip2	808	11.9	807	12.0	**808**	**11.9**	728	13.3	728	13.3	**728**	**13.3**
403.gcc	**701**	**11.5**	696	11.6	718	11.2	595	13.5	614	13.1	**597**	**13.5**
429.mcf	527	17.3	526	17.3	**526**	**17.3**	**350**	**26.0**	372	24.5	350	26.0
445.gobmk	**850**	**12.3**	853	12.3	849	12.3	657	16.0	**653**	**16.1**	653	16.1
456.hmmer	558	16.7	**557**	**16.7**	556	16.8	338	27.6	339	27.5	**338**	**27.6**
458.sjeng	**923**	**13.1**	924	13.1	923	13.1	845	14.3	843	14.4	**844**	**14.3**
462.libquantum	**550**	**37.7**	604	34.3	549	37.7	412	50.3	**413**	**50.2**	414	50.1
464.h264ref	1034	21.4	**1022**	**21.7**	1022	21.7	977	22.7	989	22.4	**981**	**22.6**
471.omnetpp	**482**	**13.0**	560	11.2	481	13.0	**482**	**13.0**	560	11.2	481	13.0
473.astar	**599**	**11.7**	598	11.7	600	11.7	586	12.0	**587**	**12.0**	587	12.0
483.xalancbmk	451	15.3	449	15.4	**451**	**15.3**	385	17.9	397	17.4	**387**	**17.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):
pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

456.hmmer: `-Mipa=jobs:4`

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

483.xalancbmk: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:28:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 December 2008.