SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint®_rate2006 = 119

SPECint_rate_base2006 = 99.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2009
Hardware Availability: Mar-2009
Software Availability: Jun-2008

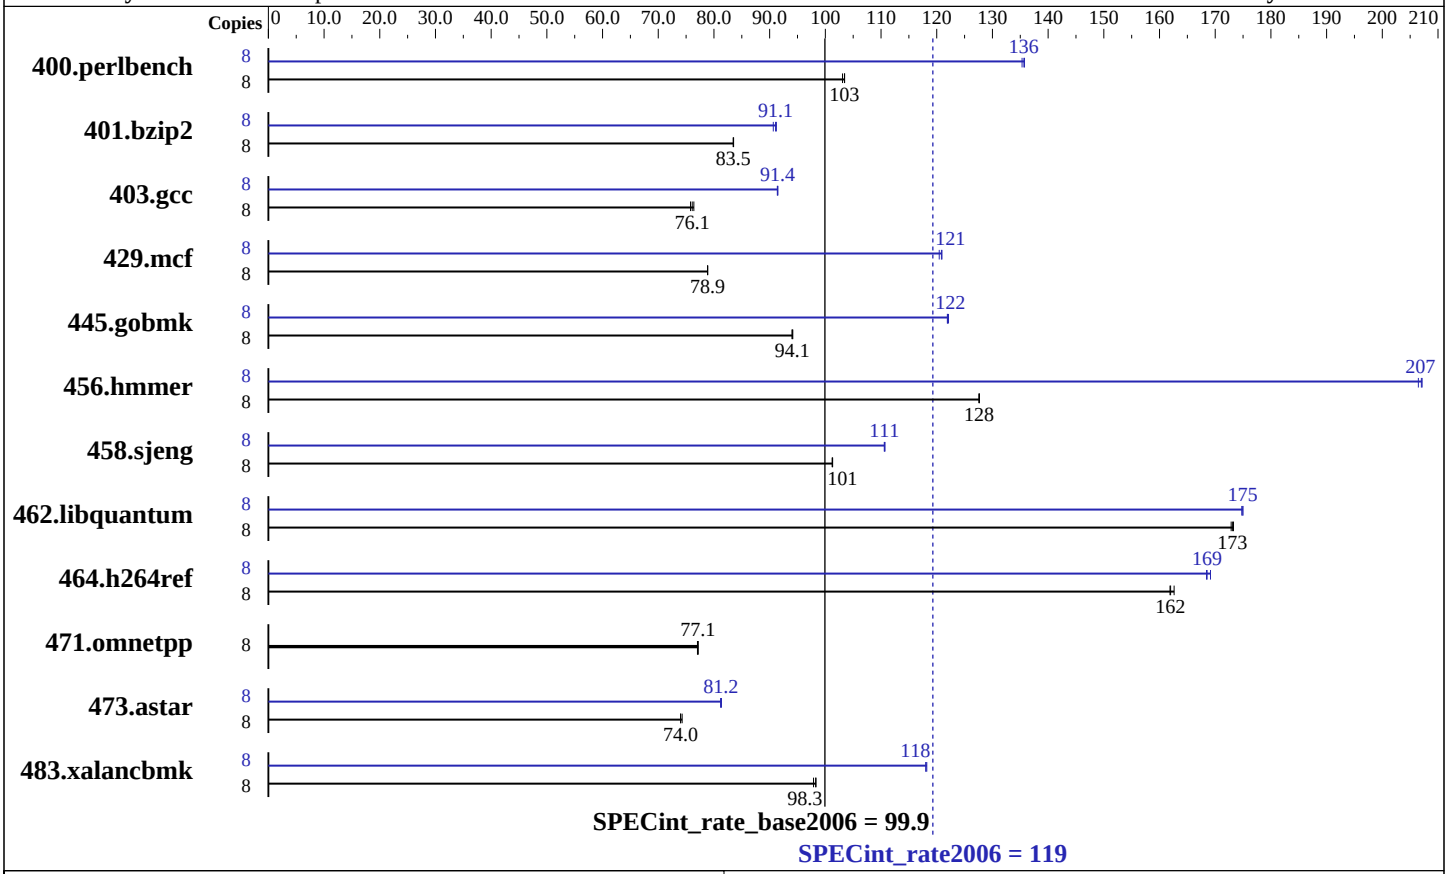

Hardware

CPU Name:	AMD Opteron 8376 HE
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-6400 ECC)
Disk Subsystem:	1 x 73 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter LS42 (AMD Opteron 8376 HE)

SPECint_rate2006 = 119

SPECint_rate_base2006 = 99.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Feb-2009
Hardware Availability: Mar-2009
Software Availability: Jun-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	**756**	**103**	755	103	758	103	8	578	135	576	136	**576**	**136**
401.bzip2	8	925	83.5	**925**	**83.5**	924	83.5	8	846	91.2	852	90.7	**848**	**91.1**
403.gcc	8	**846**	**76.1**	850	75.8	843	76.4	8	705	91.4	**704**	**91.4**	704	91.5
429.mcf	8	**925**	**78.9**	925	78.9	925	78.8	8	**604**	**121**	603	121	606	120
445.gobmk	8	**892**	**94.1**	892	94.0	891	94.2	8	688	122	687	122	**688**	**122**
456.hmmer	8	585	128	**585**	**128**	585	128	8	**361**	**207**	361	206	360	207
458.sjeng	8	**956**	**101**	956	101	955	101	8	875	111	874	111	**875**	**111**
462.libquantum	8	957	173	959	173	**957**	**173**	8	**947**	**175**	948	175	947	175
464.h264ref	8	1094	162	**1093**	**162**	1089	163	8	**1050**	**169**	1051	168	1047	169
471.omnetpp	8	649	77.0	648	77.2	**648**	**77.1**	8	649	77.0	648	77.2	**648**	**77.1**
473.astar	8	759	74.0	**759**	**74.0**	756	74.3	8	690	81.4	**691**	**81.2**	692	81.2
483.xalancbmk	8	561	98.3	564	97.9	**562**	**98.3**	8	468	118	**468**	**118**	467	118

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/cpu2006/amd909gh-libs/64:/cpu2006/amd909gh-libs/32"

Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):
pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

456.hmmer: `-Mipa=jobs:4`

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

483.xalancbmk: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090713.html`
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090713.xml`
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:32:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 March 2009.