



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp®\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

CPU2006 license: 9016


Test sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test date: Mar-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

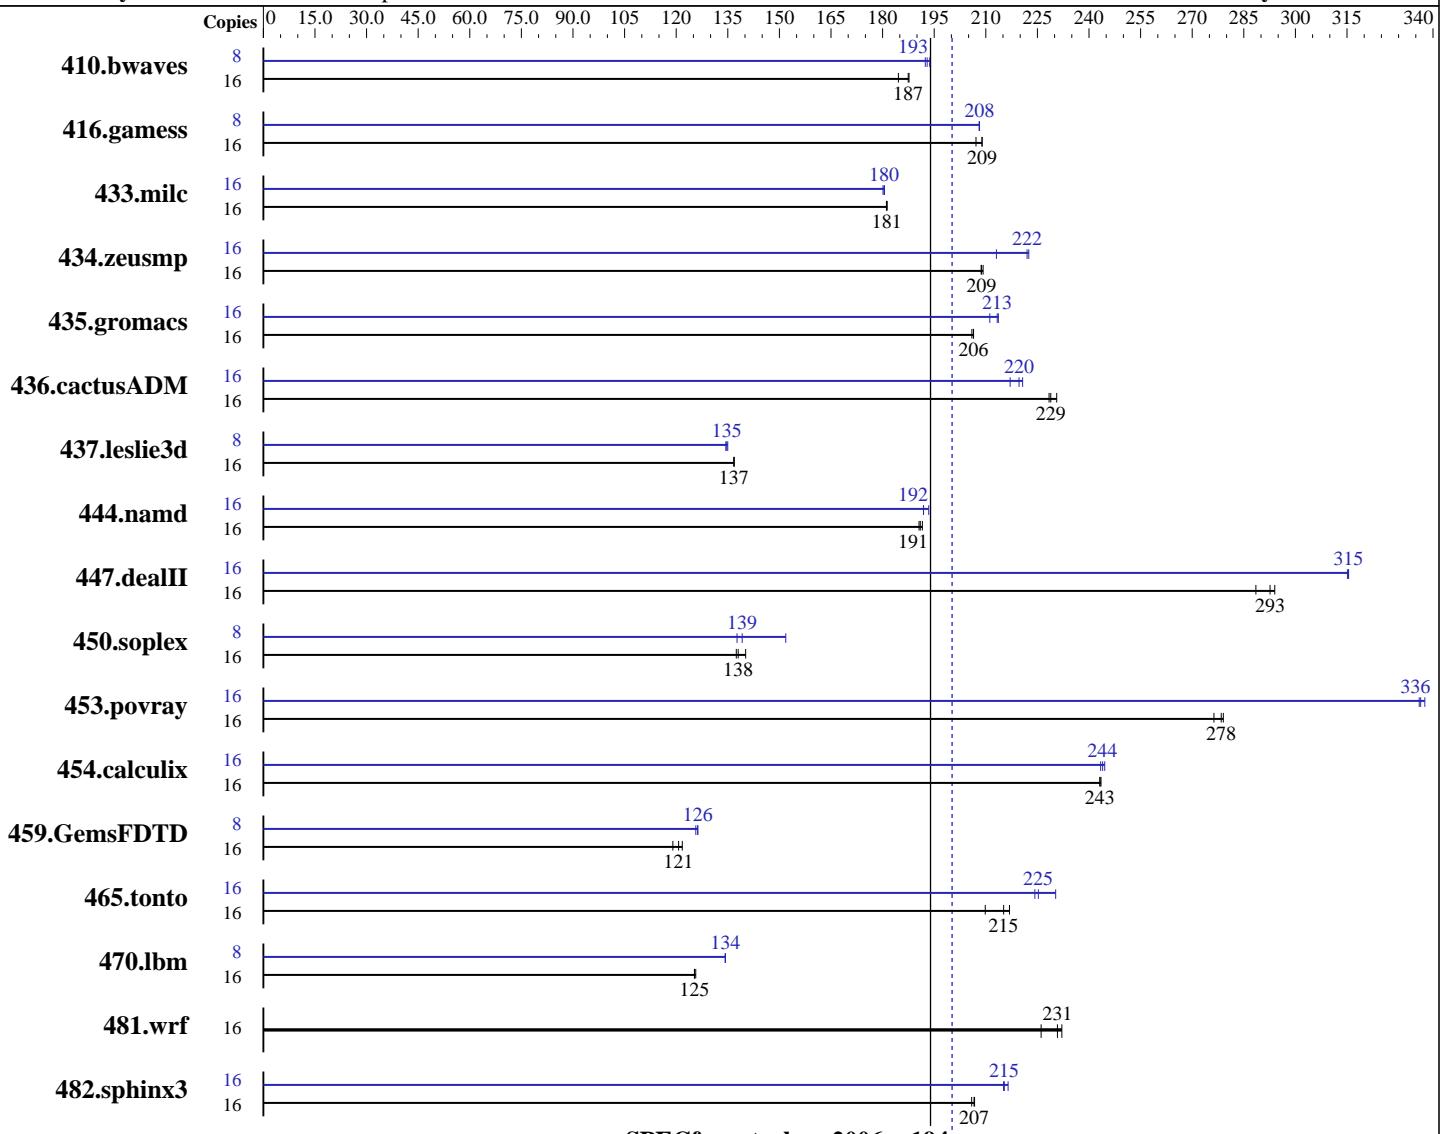

### Hardware

CPU Name: Intel Xeon X5570  
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
CPU MHz: 2933  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 10 SP2  
Compiler: Kernel 2.6.16.60-0.34-smp  
Auto Parallel: Intel C++ and Fortran Compiler 11.0 for Linux  
File System: Build 20090131 Package ID: l\_cproc\_p\_11.0.080,  
System State: l\_cprof\_p\_11.0.080  
Base Pointers: No  
ReiserFS  
Run level 3 (multi-user)  
64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

**CPU2006 license:** 9016

**Test date:** Mar-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Feb-2009

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)  
 Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM  
 Other Hardware: None

Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1178	185	<b>1160</b>	<b>187</b>	1159	188	8	<b>563</b>	<b>193</b>	565	192	561	194
416.gamess	16	1512	207	1499	209	<b>1500</b>	<b>209</b>	8	752	208	<b>753</b>	<b>208</b>	753	208
433.milc	16	811	181	810	181	<b>811</b>	<b>181</b>	16	814	181	815	180	<b>814</b>	<b>180</b>
434.zeusmp	16	698	209	<b>697</b>	<b>209</b>	696	209	16	<b>656</b>	<b>222</b>	654	223	683	213
435.gromacs	16	555	206	<b>553</b>	<b>206</b>	553	206	16	535	214	<b>536</b>	<b>213</b>	541	211
436.cactusADM	16	<b>835</b>	<b>229</b>	829	231	837	228	16	<b>870</b>	<b>220</b>	881	217	866	221
437.leslie3d	16	<b>1099</b>	<b>137</b>	1099	137	1100	137	8	<b>558</b>	<b>135</b>	557	135	559	134
444.namd	16	673	191	<b>672</b>	<b>191</b>	670	192	16	663	193	669	192	<b>669</b>	<b>192</b>
447.dealII	16	623	294	634	289	<b>625</b>	<b>293</b>	16	<b>580</b>	<b>315</b>	581	315	580	315
450.soplex	16	971	137	952	140	<b>967</b>	<b>138</b>	8	485	138	<b>479</b>	<b>139</b>	439	152
453.povray	16	308	276	305	279	<b>306</b>	<b>278</b>	16	252	338	253	336	<b>253</b>	<b>336</b>
454.calculix	16	543	243	<b>543</b>	<b>243</b>	542	243	16	<b>541</b>	<b>244</b>	540	245	542	243
459.GemsFDTD	16	1426	119	<b>1406</b>	<b>121</b>	1394	122	8	672	126	<b>672</b>	<b>126</b>	675	126
465.tonto	16	<b>732</b>	<b>215</b>	750	210	726	217	16	702	224	<b>699</b>	<b>225</b>	684	230
470.lbm	16	<b>1754</b>	<b>125</b>	1755	125	1749	126	8	<b>818</b>	<b>134</b>	818	134	819	134
481.wrf	16	770	232	791	226	<b>774</b>	<b>231</b>	16	770	232	791	226	<b>774</b>	<b>231</b>
482.sphinx3	16	1515	206	1508	207	<b>1510</b>	<b>207</b>	16	1449	215	<b>1448</b>	<b>215</b>	1440	216

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:

Hardware Prefetcher: Enabled

Adjacent Cache Line Prefetch: Enabled

Tested system case compliance with Intel EEB 3.61 spec

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

**CPU2006 license:** 9016

**Test date:** Mar-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Feb-2009

## Platform Notes (Continued)

SSI Server Power Supply 650W or higher

System was configured with ASPEED AST2050 VGA (on board VGA)

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

**CPU2006 license:** 9016

**Test sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test date:** Mar-2009

**Hardware Availability:** Mar-2009

**Software Availability:** Feb-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

**CPU2006 license:** 9016

**Test sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test date:** Mar-2009

**Hardware Availability:** Mar-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS Z8PE-D12X server motherboard (Intel Xeon X5570)

**SPECfp\_rate2006 = 200**

**SPECfp\_rate\_base2006 = 194**

**CPU2006 license:** 9016

**Test date:** Mar-2009

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2009

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -opt-prefetch -auto-ilp32
```

```
454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
```

```
481.wrf: basepeak = yes
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:34:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 March 2009.