SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

SPECint®_rate2006 = 123

SPECint_rate_base2006 = 116

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2008

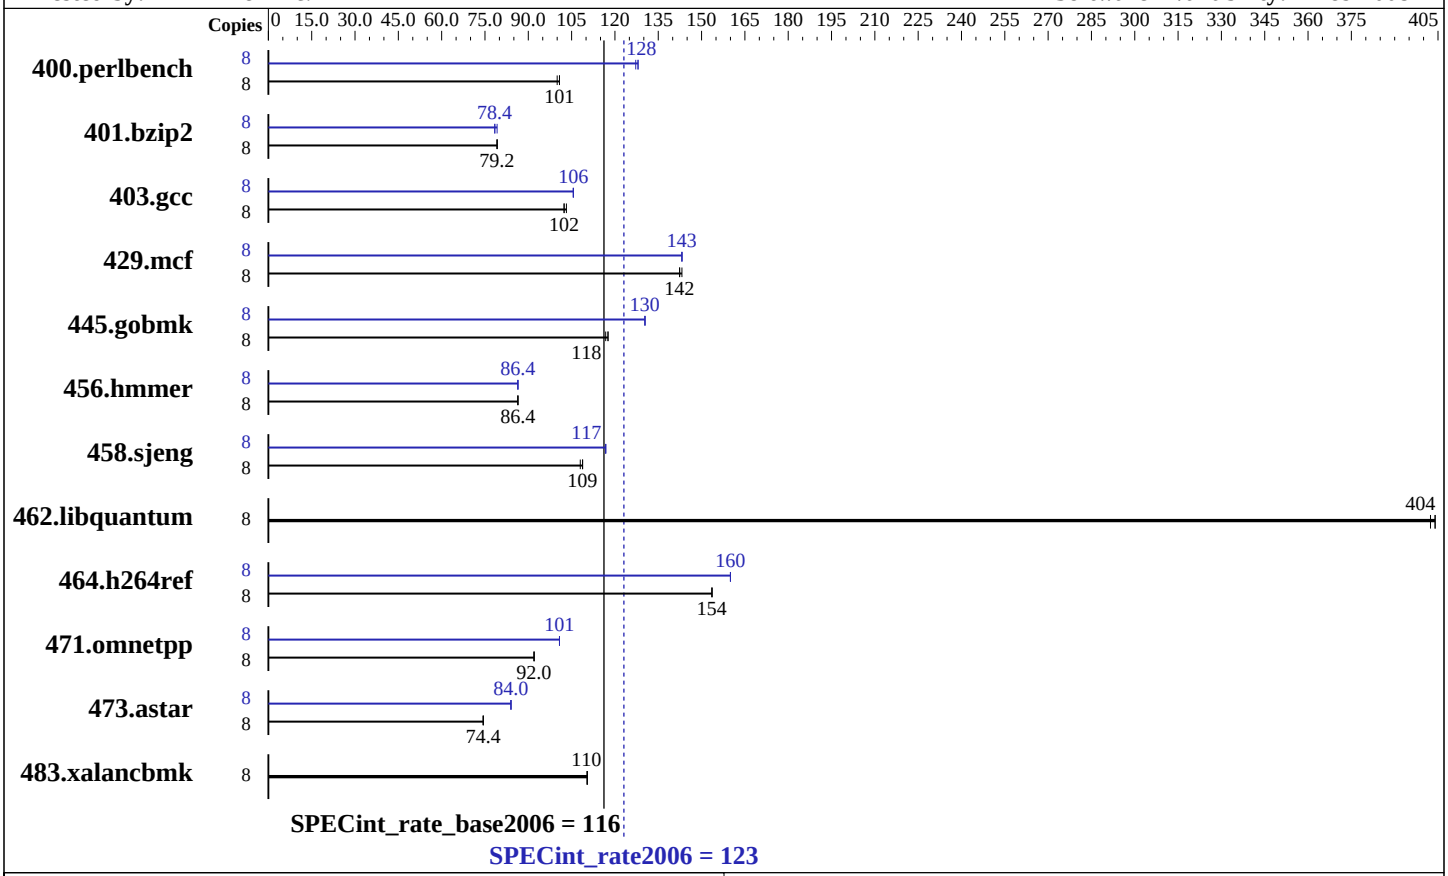

Hardware

CPU Name:	Intel Xeon X5570
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6x4 GB, DDR3_1333R, ECC, CL9)
Disk Subsystem:	1 x 80 GB SATA 7200 RPM
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate SP1 (64-bit)
Compiler:	Intel C++ Compiler for IA-32, Version 11.0 Build 20090131 Package ID: w_cproc_p_11.0.072 Microsoft Visual Studio 2008 SP1
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	MicroQuill SmartHeap Library 8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate2006 = 123

SPECint_rate_base2006 = 116

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	774	101	779	100	**778**	**101**	8	614	127	**612**	**128**	611	128
401.bzip2	8	976	79.2	**976**	**79.2**	975	79.2	8	980	78.4	979	79.2	**980**	**78.4**
403.gcc	8	630	102	626	103	**630**	**102**	8	609	106	**609**	**106**	612	106
429.mcf	8	**512**	**142**	513	142	509	143	8	**509**	**143**	508	143	510	143
445.gobmk	8	717	117	**715**	**118**	715	118	8	642	130	643	130	**642**	**130**
456.hmmer	8	867	86.4	867	86.4	**867**	**86.4**	8	863	86.4	861	86.4	**861**	**86.4**
458.sjeng	8	894	108	892	109	**892**	**109**	8	829	117	830	117	**829**	**117**
462.libquantum	8	412	402	410	404	**410**	**404**	8	412	402	410	404	**410**	**404**
464.h264ref	8	1155	154	**1155**	**154**	1156	154	8	**1107**	**160**	1108	160	1106	160
471.omnetpp	8	**545**	**92.0**	545	92.0	545	92.0	8	496	101	497	101	**496**	**101**
473.astar	8	**756**	**74.4**	756	74.4	757	74.4	8	670	84.0	**670**	**84.0**	670	84.0
483.xalancbmk	8	**501**	**110**	501	110	502	110	8	**501**	**110**	501	110	502	110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Binaries were built on Windows Vista Business (64-bit)
```

Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:

```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx_features
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Peak Optimization Flags

C benchmarks:

400.perlbench: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

401.bzip2: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000

403.gcc: -Qprof_gen(pass 1) -QxSSE4.2 -Qprof_use(pass 2) -Qipo -O3
-Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
/F512000000

458.sjeng: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -QxSSE4.2(pass 2) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/dell.ic11.0.windows.flags.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

Dell Precision T3500 (Intel Xeon X5570, 2.93 GHz)

SPECint_rate2006 = 123

SPECint_rate_base2006 = 116

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:00:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 April 2009.