



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp®2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016


Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

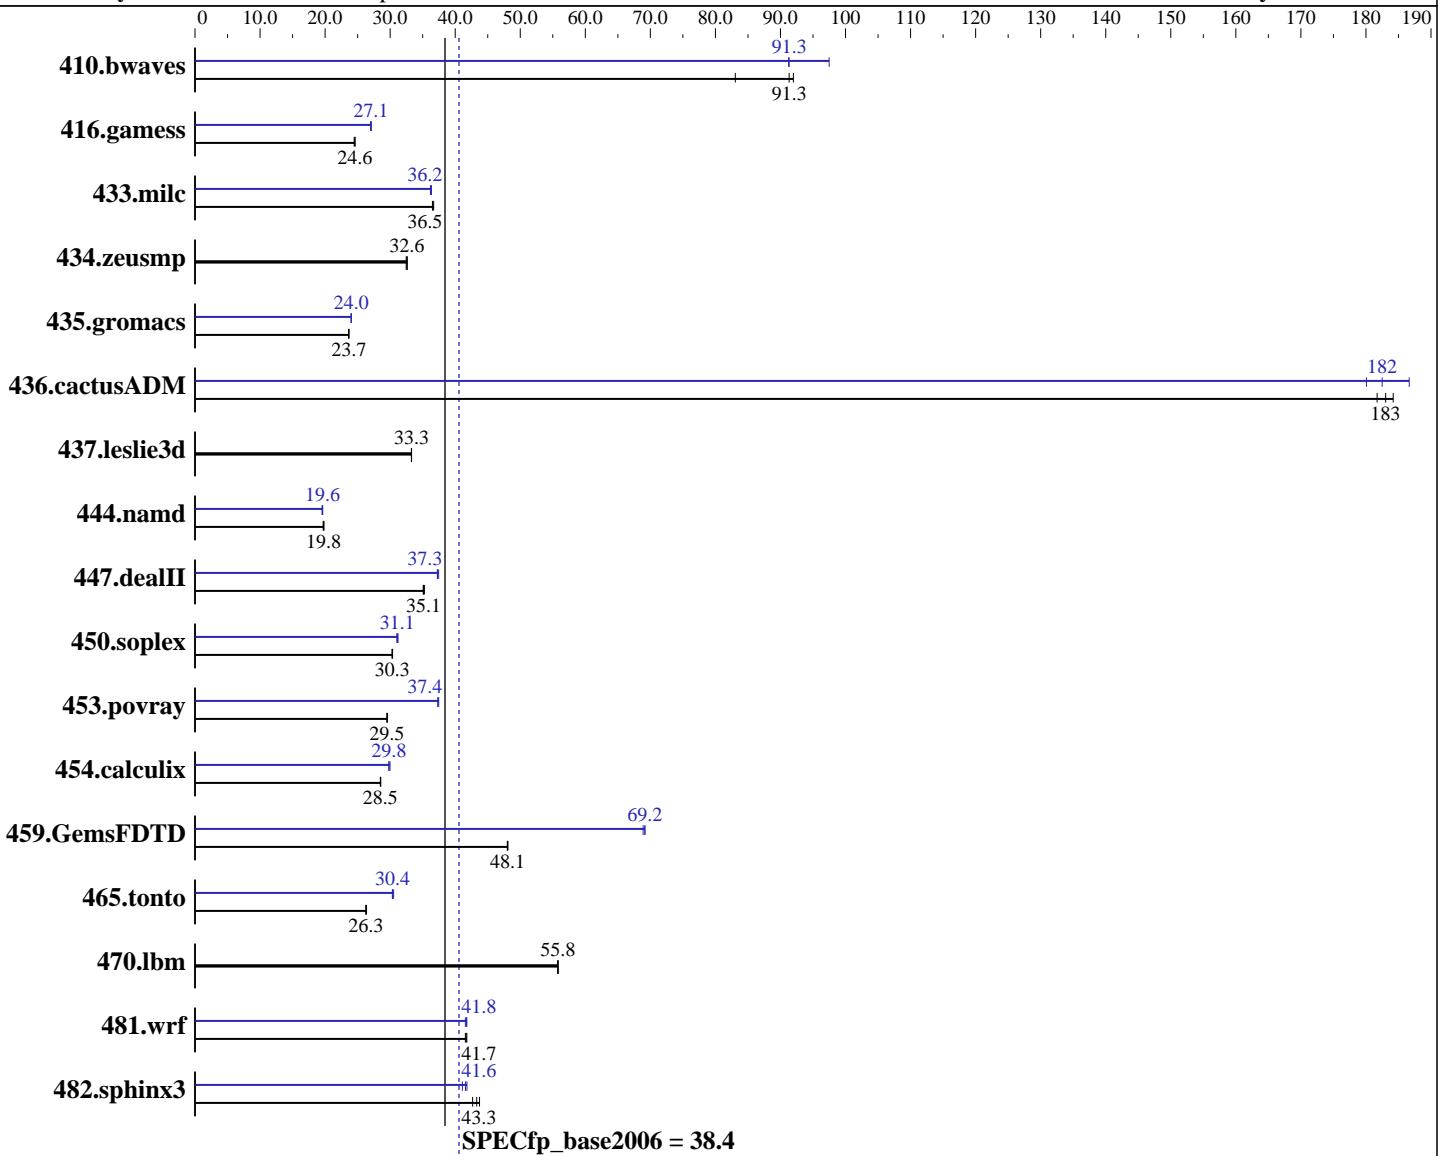

Hardware

CPU Name: Intel Xeon X5570
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz: 2933
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2
Compiler: Kernel 2.6.16.60-0.34-smp
Auto Parallel: Intel C++ and Fortran Compiler 11.0 for Linux
File System: Build 20090131 Package ID: l_cproc_p_11.0.080
System State: Yes
Base Pointers: ReiserFS
Run level 3 (multi-user)
64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 X 4 GB PC3-10600R, CL=9)
 Disk Subsystem: HITACHI HDT725050VLA360 500GB SATAII, 7200RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	164	83.1	148	92.0	149	91.3	139	97.5	149	91.3	149	91.3
416.gamess	800	24.5	796	24.6	796	24.6	723	27.1	724	27.1	725	27.0
433.milc	252	36.5	251	36.5	250	36.7	253	36.3	254	36.2	253	36.2
434.zeusmp	279	32.6	280	32.5	279	32.6	279	32.6	280	32.5	279	32.6
435.gromacs	302	23.7	302	23.7	302	23.6	297	24.0	297	24.0	297	24.0
436.cactusADM	64.9	184	65.3	183	65.8	182	64.0	187	65.5	182	66.4	180
437.leslie3d	282	33.3	283	33.3	282	33.3	282	33.3	283	33.3	282	33.3
444.namd	405	19.8	407	19.7	405	19.8	411	19.5	409	19.6	409	19.6
447.dealII	326	35.1	326	35.1	324	35.3	307	37.3	305	37.5	307	37.3
450.soplex	275	30.3	275	30.3	275	30.4	267	31.2	268	31.1	269	31.0
453.povray	180	29.6	180	29.5	180	29.5	142	37.5	142	37.4	142	37.3
454.calculix	289	28.5	289	28.6	290	28.5	275	30.0	277	29.8	277	29.8
459.GemsFDTD	221	48.1	221	48.1	221	48.0	153	69.2	153	69.2	154	68.9
465.tonto	375	26.3	374	26.3	373	26.4	322	30.5	324	30.4	324	30.3
470.lbm	246	55.8	246	55.8	246	55.8	246	55.8	246	55.8	246	55.8
481.wrf	269	41.6	268	41.7	267	41.8	269	41.6	267	41.8	267	41.8
482.sphinx3	450	43.3	457	42.7	446	43.7	474	41.1	469	41.6	466	41.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Platform Notes

BIOS setting:
 Hardware Prefetcher: Enabled
 Adjacent Cache Line Prefetch: Enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll12 -ansi-alias -scalar-rep -opt-prefetch
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll12 -Ob0 -ansi-alias -scalar-rep
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                 -unroll12 -Ob0 -opt-prefetch -parallel
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -unroll14 -auto
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -opt-prefetch -auto-ilp32
```

```
436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                  -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                  -unroll12 -opt-prefetch -parallel -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECfp2006 = 40.6

ASUS RS700-E6 server system (Intel Xeon X5570)

SPECfp_base2006 = 38.4

CPU2006 license: 9016

Test date: Mar-2009

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2009

Tested by: ASUSTeK Computer Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:57:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 April 2009.