SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M710 (Intel Xeon E5540, 2.53 GHz)

SPECint®_rate2006 = 216

SPECint_rate_base2006 = 200

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

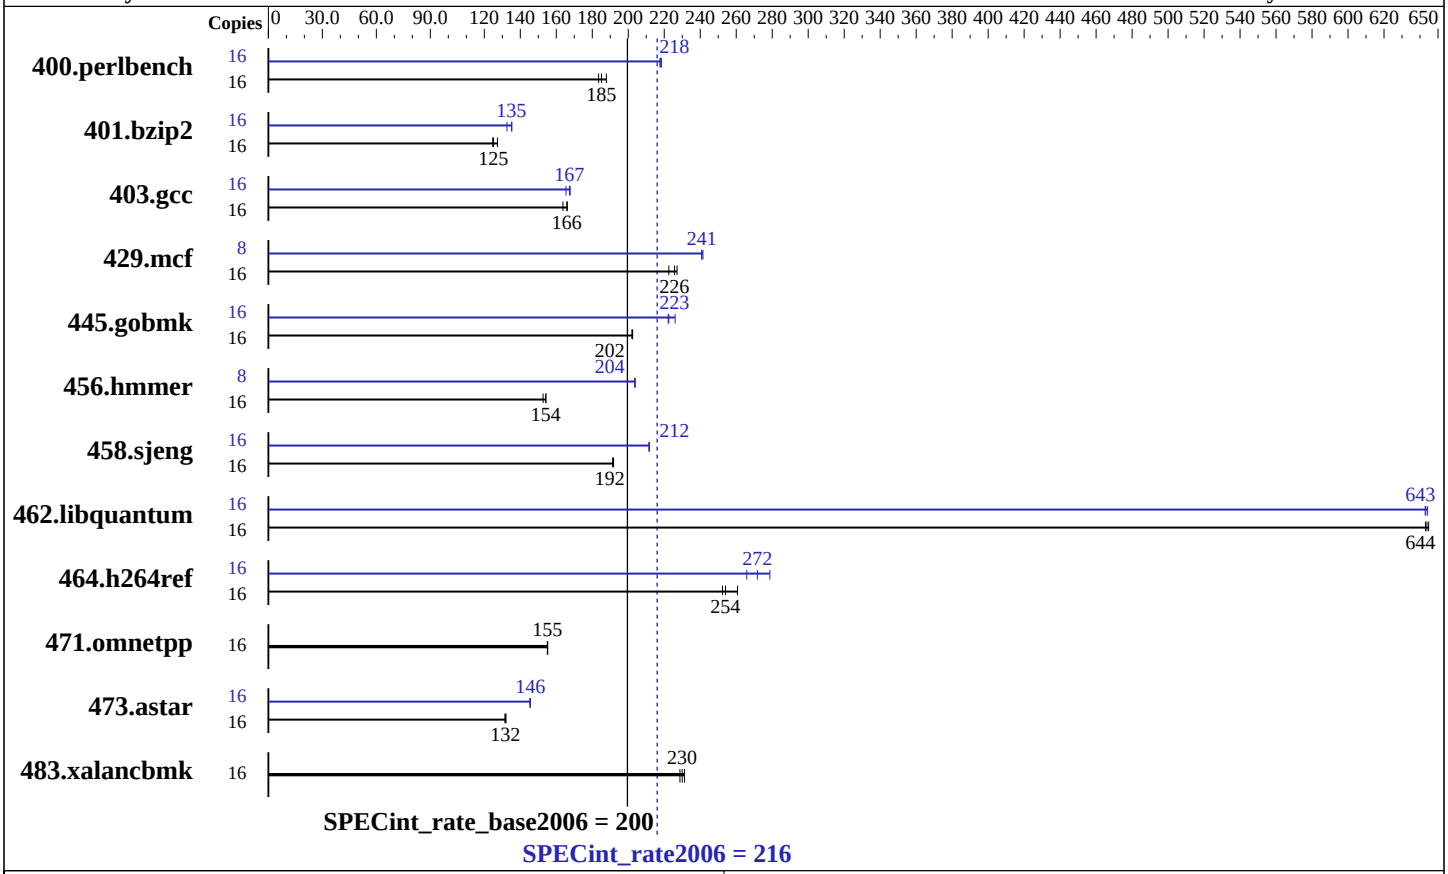

Hardware

CPU Name:	Intel Xeon E5540
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2533
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB DDR3-1067 DR RDIMM)
Disk Subsystem:	1 x 73 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M710 (Intel Xeon E5540, 2.53 GHz)

SPECint_rate2006 = 216

SPECint_rate_base2006 = 200

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Mar-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	852	184	**845**	**185**	832	188	16	**717**	**218**	716	218	718	218
401.bzip2	16	1238	125	1213	127	**1234**	**125**	16	**1143**	**135**	1164	133	1141	135
403.gcc	16	**777**	**166**	775	166	787	164	16	768	168	**770**	**167**	779	165
429.mcf	16	656	223	**646**	**226**	642	227	8	303	241	**303**	**241**	302	242
445.gobmk	16	829	202	830	202	**830**	**202**	16	742	226	755	222	**754**	**223**
456.hmmer	16	968	154	978	153	**968**	**154**	8	367	204	366	204	**366**	**204**
458.sjeng	16	**1011**	**192**	1012	191	1009	192	16	915	212	915	212	**915**	**212**
462.libquantum	16	514	645	**515**	**644**	516	643	16	516	643	**515**	**643**	515	644
464.h264ref	16	**1394**	**254**	1358	261	1403	252	16	**1303**	**272**	1271	279	1332	266
471.omnetpp	16	**645**	**155**	645	155	644	155	16	**645**	**155**	645	155	644	155
473.astar	16	851	132	854	131	**853**	**132**	16	771	146	773	145	**771**	**146**
483.xalancbmk	16	477	231	**480**	**230**	483	229	16	477	231	**480**	**230**	483	229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Base Compiler Invocation

C benchmarks:
```
icc
```

C++ benchmarks:
```
icpc
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:49:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2009.