SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G6
(2.9 GHz AMD Opteron 8389)

SPECint®_rate2006 = 259

SPECint_rate_base2006 = 220

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Mar-2009

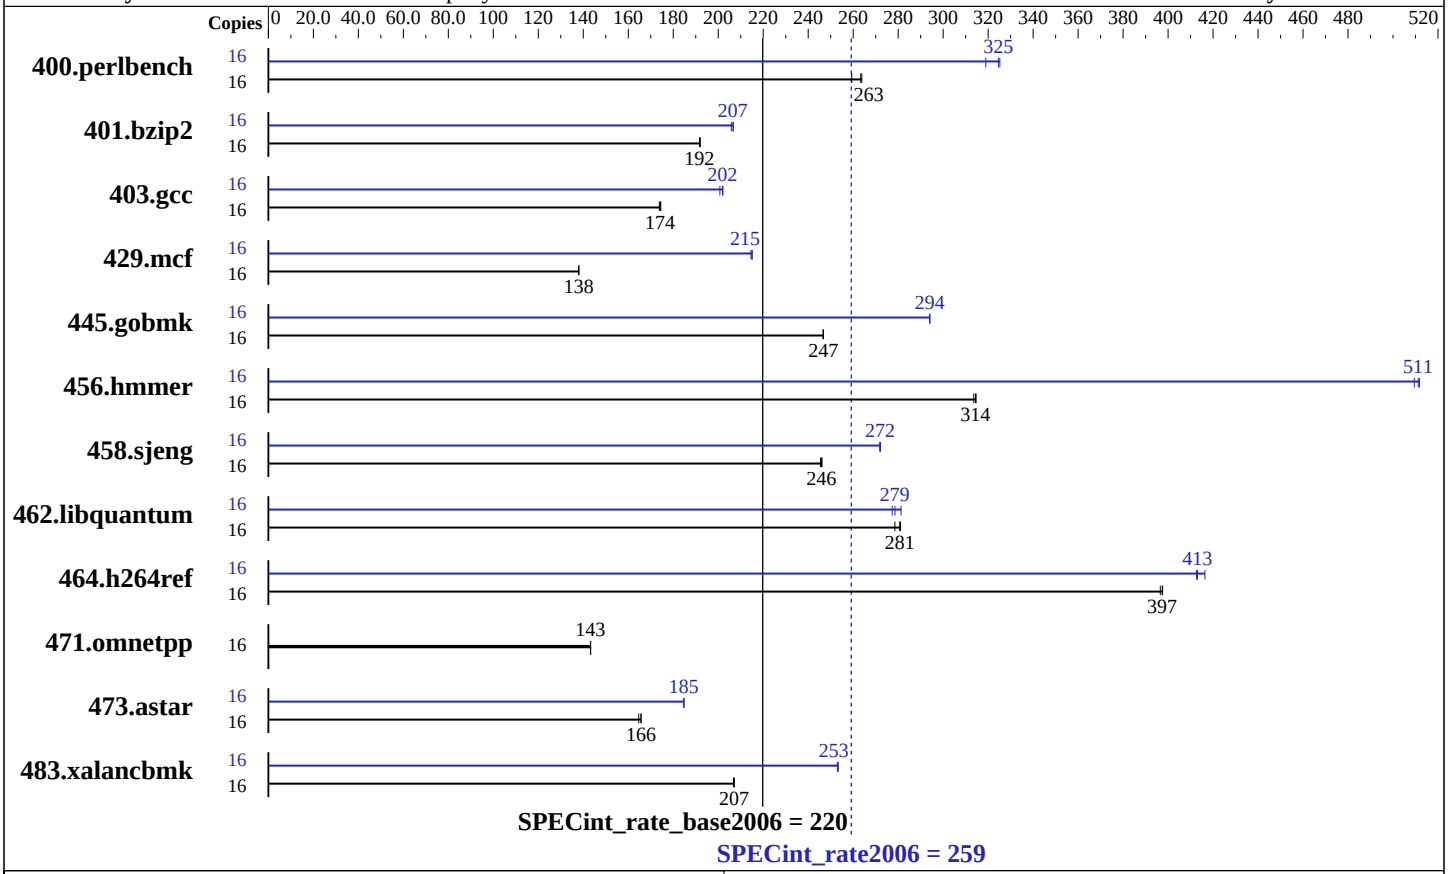

Hardware

CPU Name:	AMD Opteron 8389
CPU Characteristics:	
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16x4 GB, PC2-6400P CL5)
Disk Subsystem:	1x72 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G6
(2.9 GHz AMD Opteron 8389)

SPECint_rate2006 = 259

SPECint_rate_base2006 = 220

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Mar-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	**594**	**263**	603	259	593	264	16	**482**	**325**	490	319	481	325
401.bzip2	16	804	192	805	192	**805**	**192**	16	**748**	**207**	747	207	750	206
403.gcc	16	738	174	741	174	**739**	**174**	16	637	202	**638**	**202**	642	201
429.mcf	16	**1057**	**138**	1057	138	1058	138	16	680	215	678	215	**679**	**215**
445.gobmk	16	**680**	**247**	681	247	680	247	16	571	294	571	294	**571**	**294**
456.hmmer	16	**475**	**314**	476	314	474	315	16	292	512	**292**	**511**	293	509
458.sjeng	16	**787**	**246**	789	245	787	246	16	711	272	712	272	**712**	**272**
462.libquantum	16	1190	279	1180	281	**1181**	**281**	16	1195	277	**1190**	**279**	1179	281
464.h264ref	16	891	398	**891**	**397**	893	397	16	850	416	858	413	**857**	**413**
471.omnetpp	16	698	143	698	143	**698**	**143**	16	698	143	698	143	**698**	**143**
473.astar	16	682	165	678	166	**678**	**166**	16	608	185	**608**	**185**	608	185
483.xalancbmk	16	**533**	**207**	534	207	533	207	16	436	253	**436**	**253**	436	253

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the
installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 14336.
NCPUS set to number of cores
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):
pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/cpu2006/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

456.hmmer: `-Mipa=jobs:4`

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

483.xalancbmk: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml`
`http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:56:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 April 2009.