SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECint®2006 = 23.1

SPECint_base2006 = 19.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

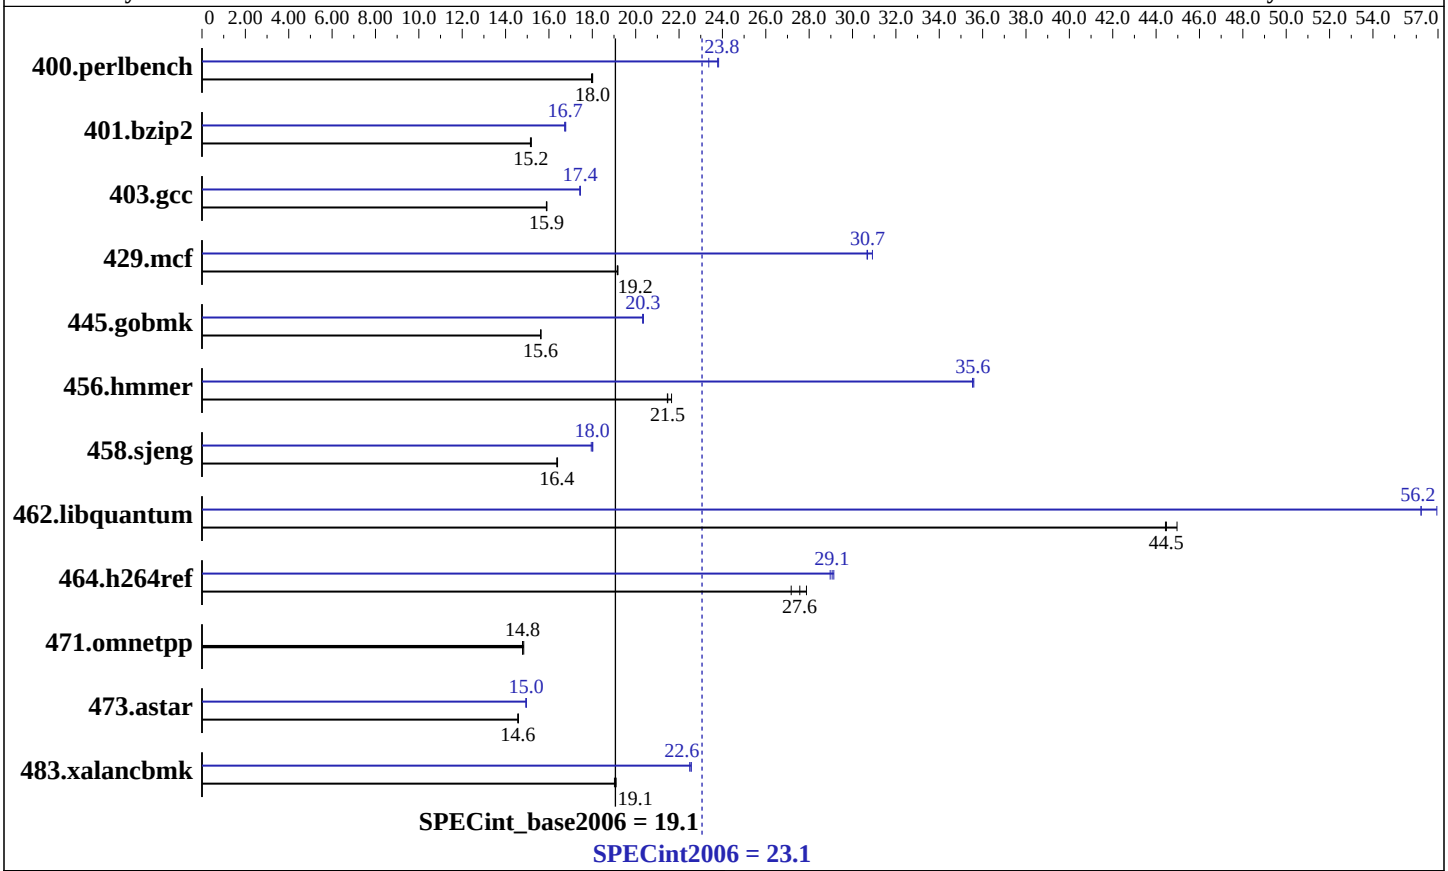

Hardware

CPU Name:	AMD Opteron 2393 SE
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2393 SE, 3.10 GHz)

SPECint2006 = 23.1

SPECint_base2006 = 19.1

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	544	18.0	**542**	**18.0**	542	18.0	418	23.4	410	23.8	**411**	**23.8**
401.bzip2	**636**	**15.2**	637	15.1	636	15.2	577	16.7	**576**	**16.7**	575	16.8
403.gcc	**506**	**15.9**	507	15.9	506	15.9	**461**	**17.4**	461	17.4	462	17.4
429.mcf	475	19.2	**476**	**19.2**	476	19.2	295	30.9	297	30.7	**297**	**30.7**
445.gobmk	671	15.6	**671**	**15.6**	671	15.6	516	20.3	**516**	**20.3**	515	20.4
456.hmmer	**434**	**21.5**	431	21.7	435	21.5	262	35.6	263	35.5	**262**	**35.6**
458.sjeng	738	16.4	**739**	**16.4**	739	16.4	671	18.0	674	18.0	**672**	**18.0**
462.libquantum	461	45.0	**466**	**44.5**	466	44.4	369	56.2	364	56.9	**369**	**56.2**
464.h264ref	**803**	**27.6**	814	27.2	794	27.9	759	29.1	**762**	**29.1**	764	29.0
471.omnetpp	421	14.8	**423**	**14.8**	423	14.8	421	14.8	**423**	**14.8**	423	14.8
473.astar	**482**	**14.6**	482	14.6	481	14.6	**470**	**15.0**	469	15.0	470	14.9
483.xalancbmk	**362**	**19.1**	361	19.1	363	19.0	306	22.6	307	22.5	**306**	**22.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores
```

Operating System Notes

```
The libhugetlbfs libraries were installed using the
installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7146 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"
```

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:
-Mipa=jobs:4

C++ benchmarks:
-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):
pathcc

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):
pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
-IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
-CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
-OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
-m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
-LNO:trip_count=256 -LNO:prefetch_ahead=10
-CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-L/usr/lib -lhugetlbfs

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
-LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
-LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
-LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
-Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
--zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-L/root/work/libraries/SmartHeap_8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

Continued on next page

Peak Other Flags (Continued)

456.hmmer: `-Mipa=jobs:4`

462.libquantum: `-Mipa=jobs:4`

C++ benchmarks (except as noted below):
`-Mipa=jobs:4`(pass 2)

483.xalancbmk: `No flags used`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/pathscale32-flags.html`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml`
`http://www.spec.org/cpu2006/flags/pathscale32-flags.xml`
`http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:23:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.