SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G6
(2.6GHz AMD Opteron 2435)

SPECint®_rate2006 = 203

SPECint_rate_base2006 = 160

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

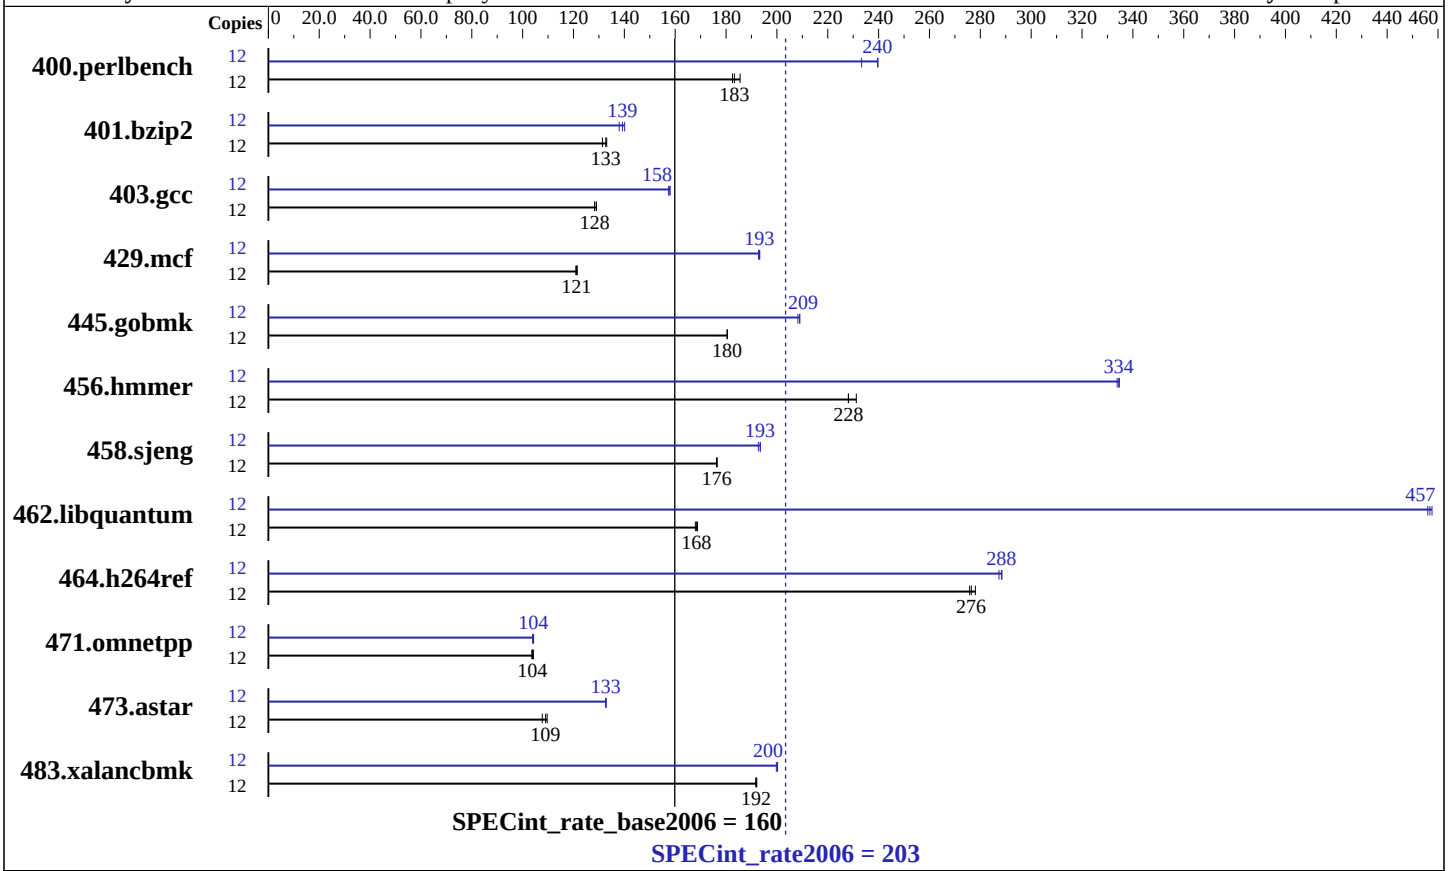

Hardware

CPU Name:	AMD Opteron 2435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem:	1 x 146 GB 10K SFF SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL465c G6
(2.6GHz AMD Opteron 2435)

SPECint_rate2006 = 203

SPECint_rate_base2006 = 160

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	632	186	642	183	**640**	**183**	12	503	233	489	240	**489**	**240**
401.bzip2	12	870	133	881	131	**873**	**133**	12	839	138	826	140	**831**	**139**
403.gcc	12	**753**	**128**	749	129	753	128	12	614	157	612	158	**612**	**158**
429.mcf	12	905	121	901	121	**903**	**121**	12	568	193	566	193	**567**	**193**
445.gobmk	12	698	180	**698**	**180**	697	181	12	**602**	**209**	602	209	604	208
456.hmmer	12	484	231	**491**	**228**	491	228	12	335	335	335	334	**335**	**334**
458.sjeng	12	824	176	**823**	**176**	823	176	12	754	193	**751**	**193**	750	193
462.libquantum	12	1473	169	1481	168	**1477**	**168**	12	545	456	**544**	**457**	543	458
464.h264ref	12	**961**	**276**	963	276	955	278	12	924	287	920	289	**921**	**288**
471.omnetpp	12	724	104	**722**	**104**	720	104	12	**719**	**104**	722	104	719	104
473.astar	12	**773**	**109**	782	108	768	110	12	**635**	**133**	634	133	635	133
483.xalancbmk	12	**432**	**192**	431	192	432	192	12	414	200	413	200	**414**	**200**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit
 The libhugetlbfs libraries were installed using the
 installation rpms that came with the distribution.

 Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
```

Continued on next page

General Notes (Continued)

```
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64.
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:
`-march=barcelona -Ofast -m32 -INLINE:aggressive=on`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks (except as noted below):
`opencc`

456.hmmer: `pgcc`

C++ benchmarks (except as noted below):
`openCC`

Continued on next page

Peak Compiler Invocation (Continued)

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:14:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 June 2009.