SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G6
(2.6 GHz AMD Opteron 8435)

SPECint®_rate2006 = 204

SPECint_rate_base2006 = 160

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

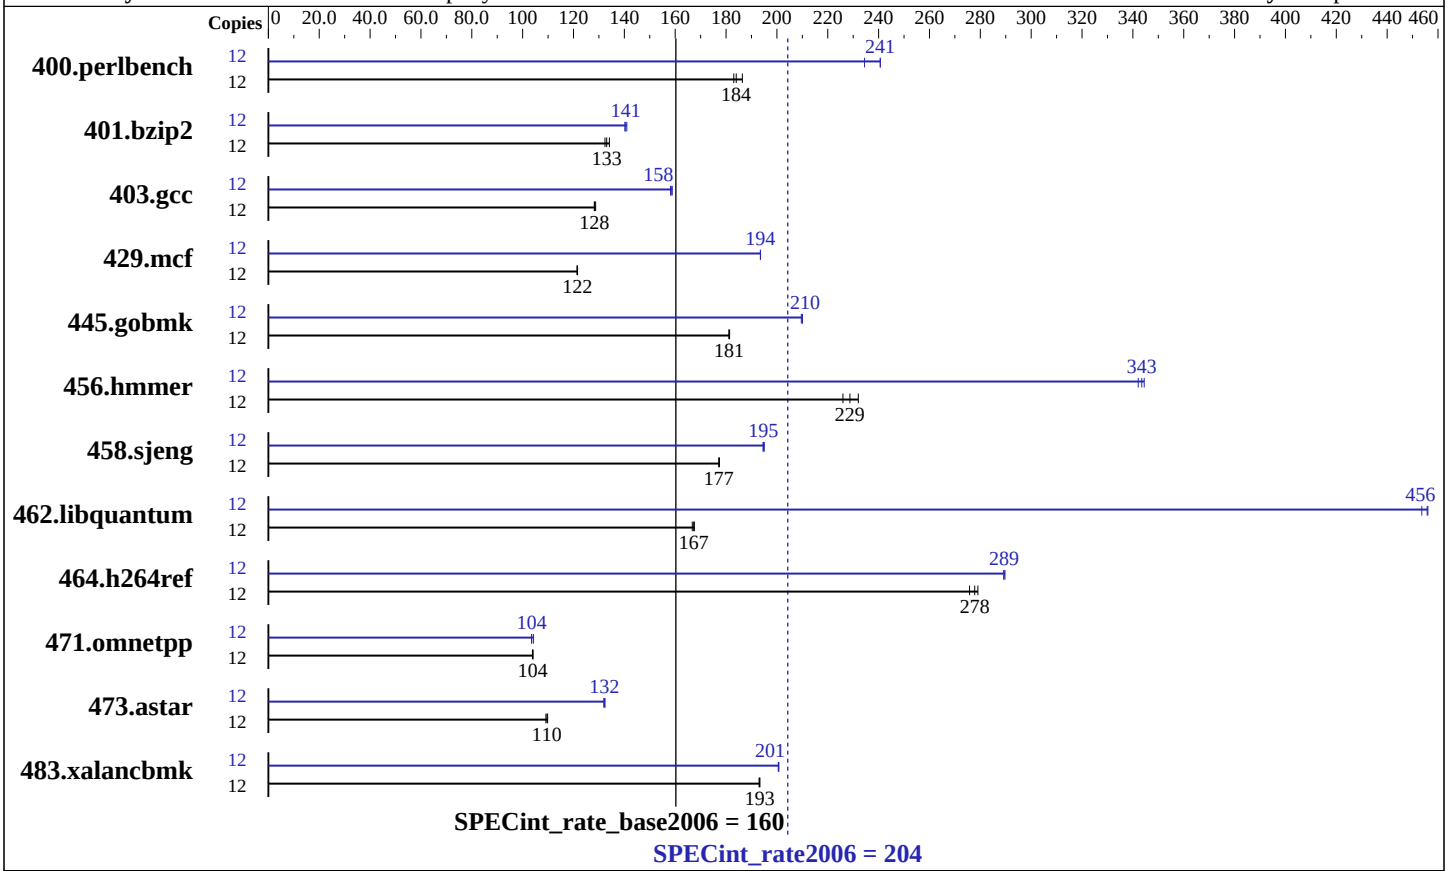

Hardware

CPU Name:	AMD Opteron 8435
CPU Characteristics:	
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem:	2x146 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G6
(2.6 GHz AMD Opteron 8435)

SPECint_rate2006 = 204

SPECint_rate_base2006 = 160

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	629	186	640	183	**637**	**184**	12	500	234	**487**	**241**	487	241
401.bzip2	12	863	134	875	132	**870**	**133**	12	826	140	**824**	**141**	821	141
403.gcc	12	754	128	**753**	**128**	751	129	12	611	158	**610**	**158**	608	159
429.mcf	12	902	121	900	122	**900**	**122**	12	565	194	566	193	**565**	**194**
445.gobmk	12	695	181	**695**	**181**	694	181	12	601	210	**600**	**210**	599	210
456.hmmer	12	**490**	**229**	495	226	483	232	12	325	344	**326**	**343**	327	342
458.sjeng	12	819	177	819	177	**819**	**177**	12	**746**	**195**	746	195	744	195
462.libquantum	12	1484	168	1491	167	**1486**	**167**	12	548	454	545	456	**546**	**456**
464.h264ref	12	963	276	952	279	**956**	**278**	12	918	289	**918**	**289**	917	290
471.omnetpp	12	722	104	**721**	**104**	721	104	12	725	103	**724**	**104**	719	104
473.astar	12	**769**	**110**	767	110	772	109	12	636	132	**637**	**132**	639	132
483.xalancbmk	12	429	193	**428**	**193**	428	193	12	**413**	**201**	412	201	413	201

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2457600'  was used to set environment locked pages in memory limit
 The libhugetlbfs libraries were installed using the
 installation rpms that came with the distribution.

 Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"
```

Continued on next page

General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at http://developer.amd.com/cpu/open64.

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

Continued on next page

Peak Compiler Invocation (Continued)

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:11

C++ benchmarks:

473.astar: -Mipa=jobs:11(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml
http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.00.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:35:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.