SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

A+ Server 1021M-UR+B, AMD Opteron 2439 SE

SPECint®_rate2006 = 215

SPECint_rate_base2006 = 168

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

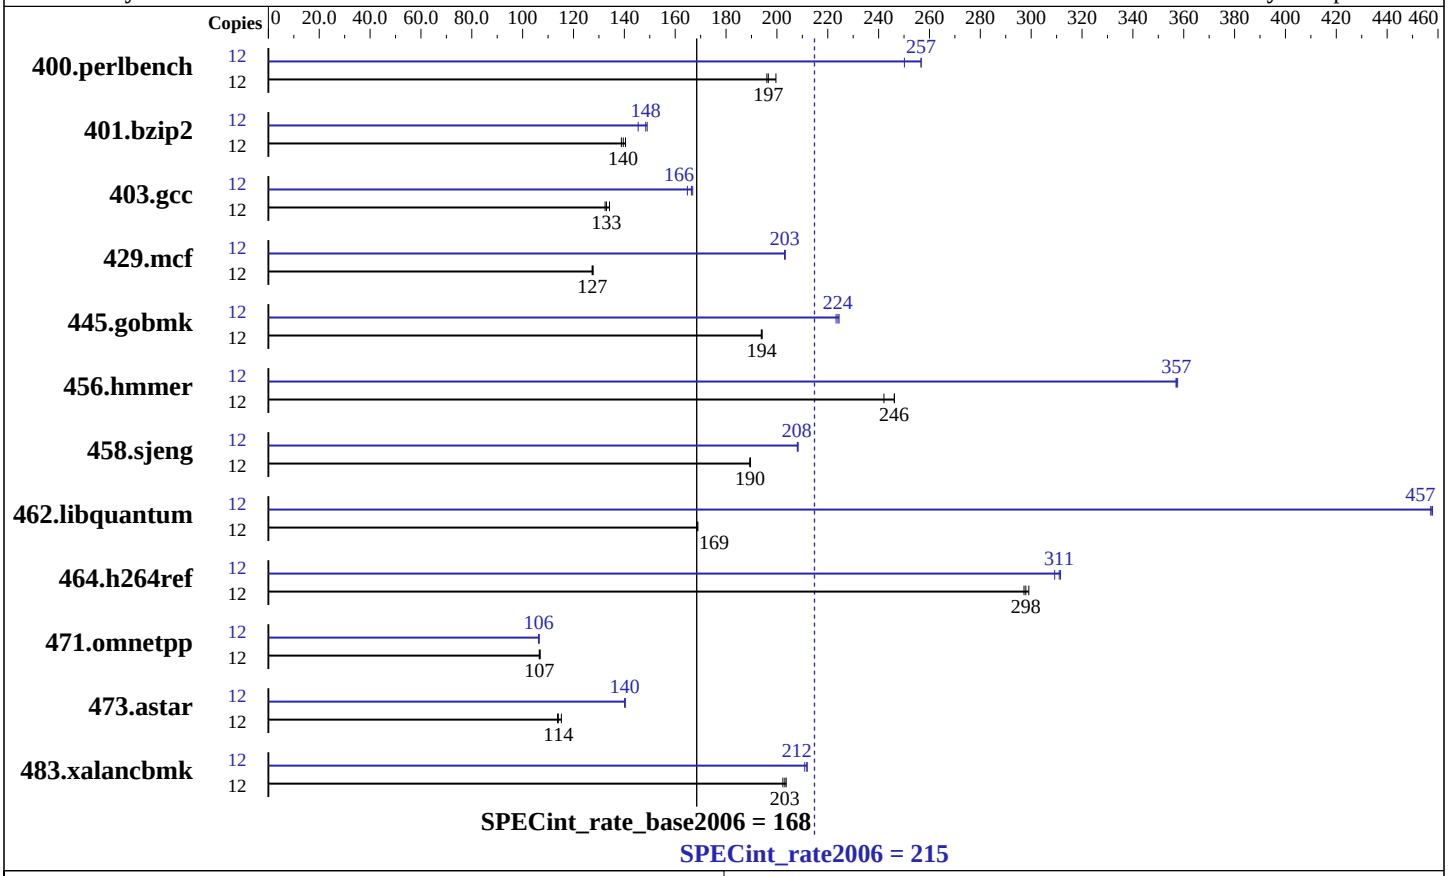

Hardware

CPU Name:	AMD Opteron 2439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

A+ Server 1021M-UR+B, AMD Opteron 2439 SE

SPECint_rate2006 = 215

SPECint_rate_base2006 = 168

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: May-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	587	200	598	196	**596**	**197**	12	469	250	**457**	**257**	457	257
401.bzip2	12	824	140	834	139	**830**	**140**	12	796	145	777	149	**780**	**148**
403.gcc	12	729	132	720	134	**727**	**133**	12	**581**	**166**	586	165	579	167
429.mcf	12	860	127	857	128	**859**	**127**	12	538	203	**539**	**203**	539	203
445.gobmk	12	648	194	649	194	**648**	**194**	12	**562**	**224**	564	223	561	224
456.hmmer	12	462	242	455	246	**455**	**246**	12	**314**	**357**	314	357	313	358
458.sjeng	12	766	190	767	189	**766**	**190**	12	697	208	**697**	**208**	698	208
462.libquantum	12	1476	168	**1475**	**169**	1472	169	12	544	457	543	458	**544**	**457**
464.h264ref	12	888	299	894	297	**891**	**298**	12	**854**	**311**	852	312	859	309
471.omnetpp	12	704	107	701	107	**704**	**107**	12	**705**	**106**	704	107	706	106
473.astar	12	731	115	**739**	**114**	741	114	12	601	140	**601**	**140**	600	140
483.xalancbmk	12	**408**	**203**	409	202	407	204	12	393	211	**391**	**212**	391	212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd0905is-libs/64:/root/work/cpu2006v1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:
`-march=barcelona -Ofast -m32 -INLINE:aggressive=on`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks (except as noted below):
`opencc`

456.hmmer: `pgcc`

C++ benchmarks (except as noted below):
`openCC`

473.astar: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`
`-HP:bdt=2m:heap=2m`

462.libquantum: `-march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off`
`-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0`
`-HP:bdt=2m:heap=2m -OPT:alias=disjoint`
`-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000`

464.h264ref: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `-march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on`
`-OPT:alias=disjoint -WOPT:if_conv=0 -m32`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2)
`-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge`
`-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32`
`-Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

456.hmmer: `-Mipa=jobs:4`

C++ benchmarks:

473.astar: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.html`
`http://www.spec.org/cpu2006/flags/amd-platform.20090710.html`
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html`

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.20090710.xml
http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:03:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 July 2009.