SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 S4 (Intel Xeon E5520)

SPECint®_rate2006 = 200

SPECint_rate_base2006 = 185

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

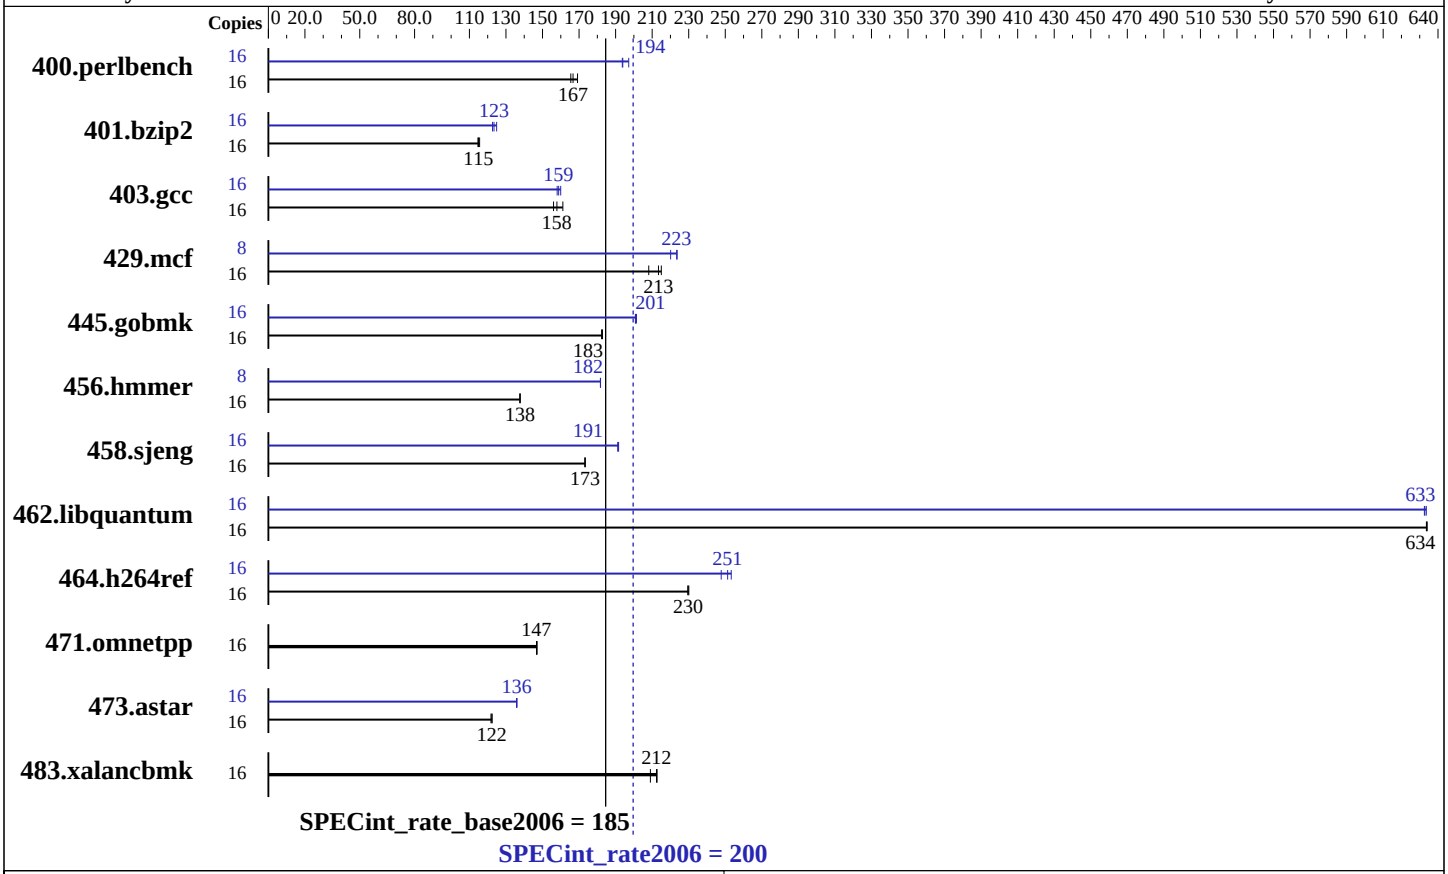

Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6x 4 GB PC3-8500, 1066 MHz, DDR3, ECC)
Disk Subsystem:	1x 147 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) with SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Binutils 2.18.50.0.7.20080502 Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 820 S4 (Intel Xeon E5520)

SPECint_rate2006 = 200

SPECint_rate_base2006 = 185

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: May-2009
Hardware Availability: Apr-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	**938**	**167**	945	165	924	169	16	807	194	793	197	**806**	**194**
401.bzip2	16	1346	115	1336	116	**1343**	**115**	16	1259	123	1236	125	**1251**	**123**
403.gcc	16	**816**	**158**	825	156	799	161	16	805	160	**811**	**159**	815	158
429.mcf	16	701	208	679	215	**684**	**213**	8	331	220	**327**	**223**	326	224
445.gobmk	16	920	182	918	183	**919**	**183**	16	833	201	836	201	**835**	**201**
456.hmmer	16	1084	138	**1084**	**138**	1085	138	8	**411**	**182**	411	182	411	182
458.sjeng	16	1117	173	1118	173	**1117**	**173**	16	**1012**	**191**	1013	191	1010	192
462.libquantum	16	523	634	523	634	**523**	**634**	16	524	633	523	634	**524**	**633**
464.h264ref	16	1539	230	1543	230	**1542**	**230**	16	**1409**	**251**	1398	253	1429	248
471.omnetpp	16	680	147	681	147	**681**	**147**	16	680	147	681	147	**681**	**147**
473.astar	16	922	122	**918**	**122**	918	122	16	827	136	**826**	**136**	826	136
483.xalancbmk	16	528	209	**520**	**212**	519	213	16	528	209	**520**	**212**	519	213

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

General Notes

```
'numactl' was used to bind copies to the cores
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:38:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 July 2009.