SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint®_rate2006 = 416

SPECint_rate_base2006 = 326

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

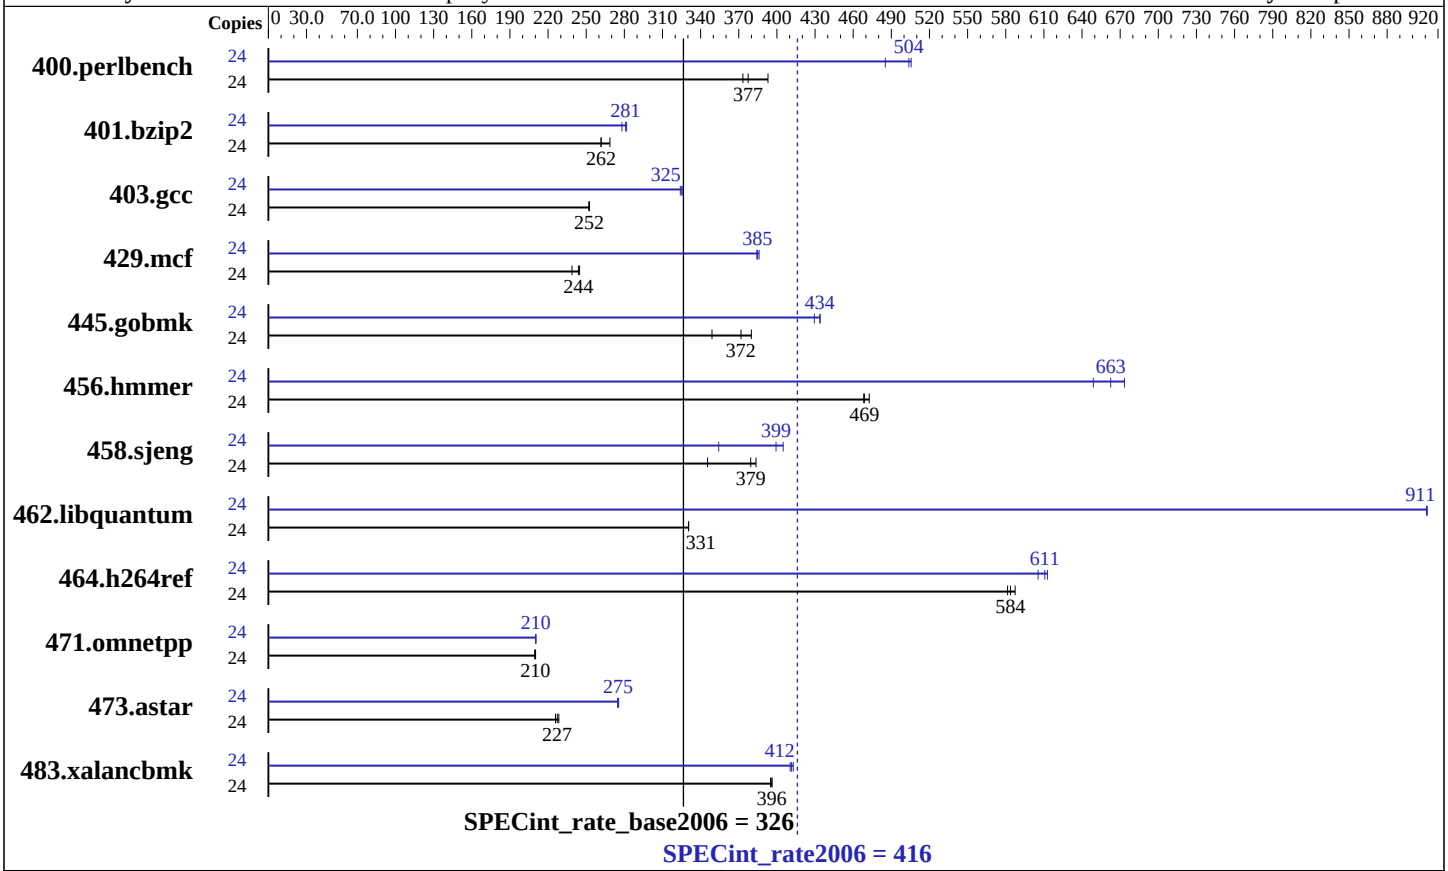

Hardware

CPU Name:	AMD Opteron 8439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	64 GB (16x4 GB, PC2-6400P CL5)
Disk Subsystem:	1x146 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL585 G6
(2.8 GHz AMD Opteron 8439 SE)

SPECint_rate2006 = 416

SPECint_rate_base2006 = 326

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	597	393	628	373	**621**	**377**	24	483	485	464	506	**465**	**504**
401.bzip2	24	862	269	885	262	**885**	**262**	24	833	278	822	282	**824**	**281**
403.gcc	24	**766**	**252**	765	252	766	252	24	**594**	**325**	596	324	594	325
429.mcf	24	**897**	**244**	894	245	917	239	24	570	384	567	386	**569**	**385**
445.gobmk	24	**677**	**372**	722	349	663	380	24	580	434	586	429	**580**	**434**
456.hmmer	24	478	468	474	473	**478**	**469**	24	345	649	333	673	**338**	**663**
458.sjeng	24	**765**	**379**	841	345	757	384	24	**727**	**399**	717	405	820	354
462.libquantum	24	1505	330	**1505**	**331**	1504	331	24	546	911	546	911	**546**	**911**
464.h264ref	24	913	581	904	587	**910**	**584**	24	877	605	867	613	**870**	**611**
471.omnetpp	24	714	210	**714**	**210**	716	209	24	713	210	713	210	**713**	**210**
473.astar	24	737	228	**741**	**227**	746	226	24	613	275	612	276	**612**	**275**
483.xalancbmk	24	418	396	**418**	**396**	419	395	24	403	410	**402**	**412**	401	413

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2457600'  was used to set environment locked pages in memory limit
 The libhugetlbfs libraries were installed using the
 installation rpms that came with the distribution.

 Set vm/nr_hugepages=10800 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS configuration:
  Power Regulator set to Static High Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd0905is-libs/64:/cpu2006/amd0905is-libs/32"
NCPUS = "6"
PGI_HUGE_PAGES = "450"
```

Continued on next page

General Notes (Continued)

```
The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

Continued on next page

Peak Compiler Invocation (Continued)

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.html
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revA.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.xml
http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:18:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 July 2009.