



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 25.0

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = 23.9

CPU2006 license: 11


Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

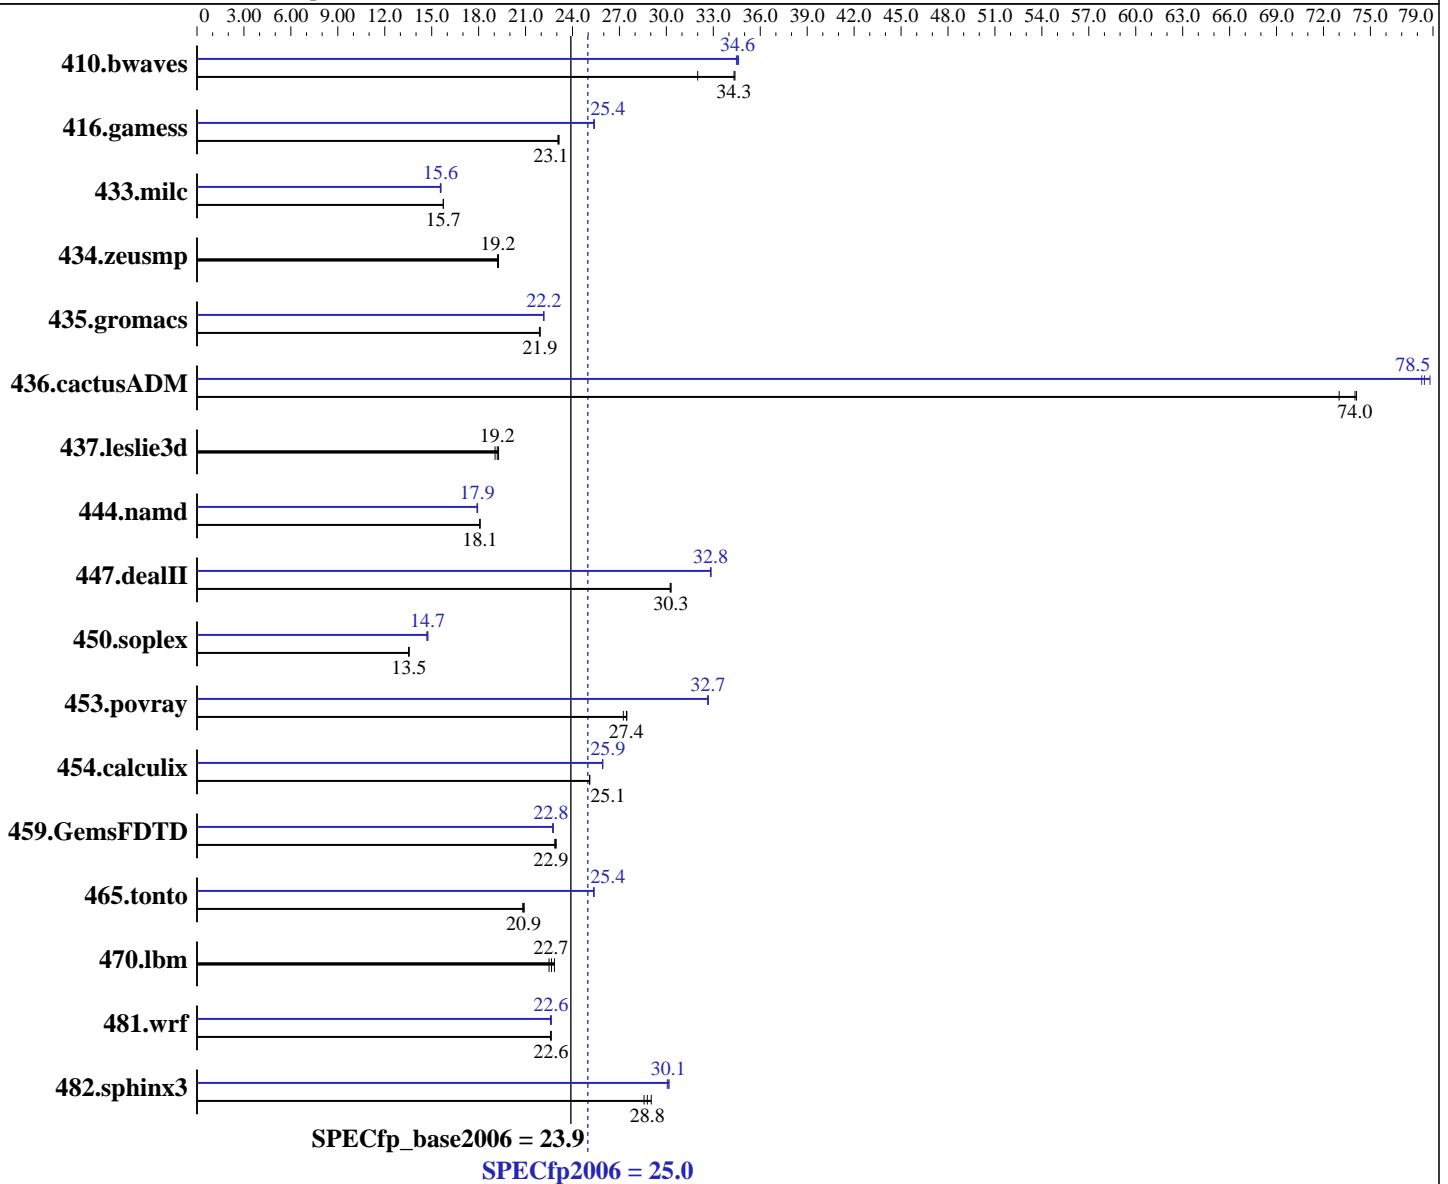

Hardware

CPU Name: Intel Xeon X5260
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **25.0**

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = **23.9**

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (4 x 4 GB PC2-5300F ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	425	32.0	396	34.3	395	34.4	393	34.6	394	34.5	393	34.6
416.gamess	849	23.1	846	23.1	847	23.1	771	25.4	772	25.4	772	25.4
433.milc	583	15.7	583	15.8	583	15.7	590	15.6	588	15.6	590	15.6
434.zeusmp	472	19.3	473	19.2	474	19.2	472	19.3	473	19.2	474	19.2
435.gromacs	326	21.9	326	21.9	326	21.9	322	22.2	322	22.2	322	22.2
436.cactusADM	161	74.0	161	74.1	164	73.0	152	78.8	153	78.3	152	78.5
437.leslie3d	493	19.1	490	19.2	488	19.3	493	19.1	490	19.2	488	19.3
444.namd	444	18.1	444	18.1	443	18.1	448	17.9	447	17.9	448	17.9
447.dealII	378	30.3	378	30.2	378	30.3	348	32.8	348	32.8	348	32.8
450.soplex	616	13.5	615	13.6	616	13.5	565	14.8	568	14.7	565	14.7
453.povray	194	27.4	194	27.5	195	27.2	163	32.6	163	32.7	163	32.7
454.calculix	329	25.1	329	25.1	329	25.1	318	25.9	318	25.9	318	25.9
459.GemsFDTD	464	22.9	463	22.9	462	23.0	467	22.7	466	22.8	466	22.8
465.tonto	471	20.9	473	20.8	471	20.9	388	25.4	388	25.4	388	25.3
470.lbm	611	22.5	606	22.7	601	22.8	611	22.5	606	22.7	601	22.8
481.wrf	494	22.6	494	22.6	493	22.6	494	22.6	493	22.6	493	22.6
482.sphinx3	671	29.0	682	28.6	677	28.8	647	30.1	646	30.2	648	30.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M
Memory Configuration set to "Performance Optimized"
Hardware Prefetcher Enable and Adjacent Cache Line Prefetch Enable

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.0

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = 23.9

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.0

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = 23.9

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
             -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
             -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
            -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
            -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -fno-alias
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.0

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = 23.9

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

470.ibm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 25.0

IBM System x iDataPlex dx340 (Intel Xeon X5260)

SPECfp_base2006 = 23.9

CPU2006 license: 11

Test date: Oct-2008

Test sponsor: IBM Corporation

Hardware Availability: Oct-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090805.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:08:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.