SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M805 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint®_rate2006 = 176

SPECint_rate_base2006 = 139

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

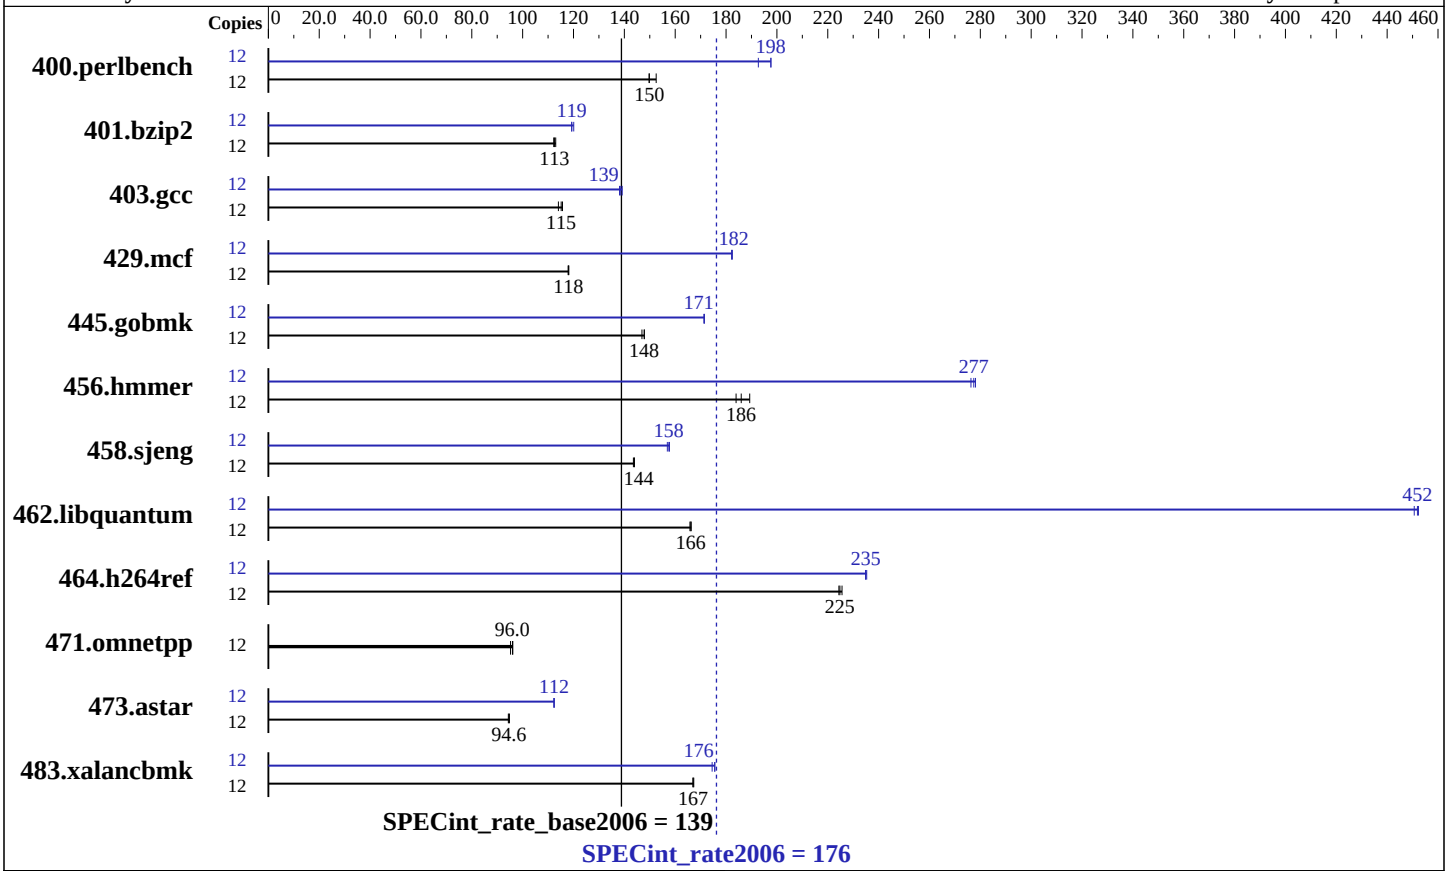

Hardware

CPU Name:	AMD Opteron 2425 HE
CPU Characteristics:	
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M805 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint_rate2006 = 176

SPECint_rate_base2006 = 139

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	769	153	783	150	**783**	**150**	12	608	193	**593**	**198**	593	198
401.bzip2	12	1025	113	1032	112	**1029**	**113**	12	**970**	**119**	964	120	971	119
403.gcc	12	**839**	**115**	847	114	835	116	12	694	139	**697**	**139**	699	138
429.mcf	12	928	118	**927**	**118**	926	118	12	**600**	**182**	601	182	600	182
445.gobmk	12	857	147	**852**	**148**	851	148	12	734	171	**734**	**171**	735	171
456.hmmer	12	609	184	591	189	**602**	**186**	12	**404**	**277**	405	276	403	278
458.sjeng	12	**1009**	**144**	1009	144	1011	144	12	920	158	925	157	**922**	**158**
462.libquantum	12	1495	166	**1497**	**166**	1500	166	12	552	451	**550**	**452**	550	452
464.h264ref	12	1177	226	**1181**	**225**	1184	224	12	1131	235	**1130**	**235**	1129	235
471.omnetpp	12	788	95.2	**781**	**96.0**	780	96.1	12	788	95.2	**781**	**96.0**	780	96.1
473.astar	12	893	94.4	**890**	**94.6**	889	94.8	12	**750**	**112**	750	112	750	112
483.xalancbmk	12	495	167	**496**	**167**	496	167	12	474	175	472	176	**472**	**176**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:
`-march=barcelona -Ofast -m32 -INLINE:aggressive=on`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks (except as noted below):
`opencc`

456.hmmer: `pgcc`

C++ benchmarks (except as noted below):
`openCC`

473.astar: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html
http://www.spec.org/cpu2006/flags/amd-platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml
http://www.spec.org/cpu2006/flags/amd-platform.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M805 (AMD Opteron 2425 HE, 2.10 GHz)

SPECint_rate2006 = 176

SPECint_rate_base2006 = 139

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:26:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 August 2009.