SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6240 (AMD Opteron 2439 SE 2.8GHz)

SPECint®_rate2006 = 203

SPECint_rate_base2006 = 160

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Aug-2009
Hardware Availability: Oct-2009
Software Availability: Apr-2009

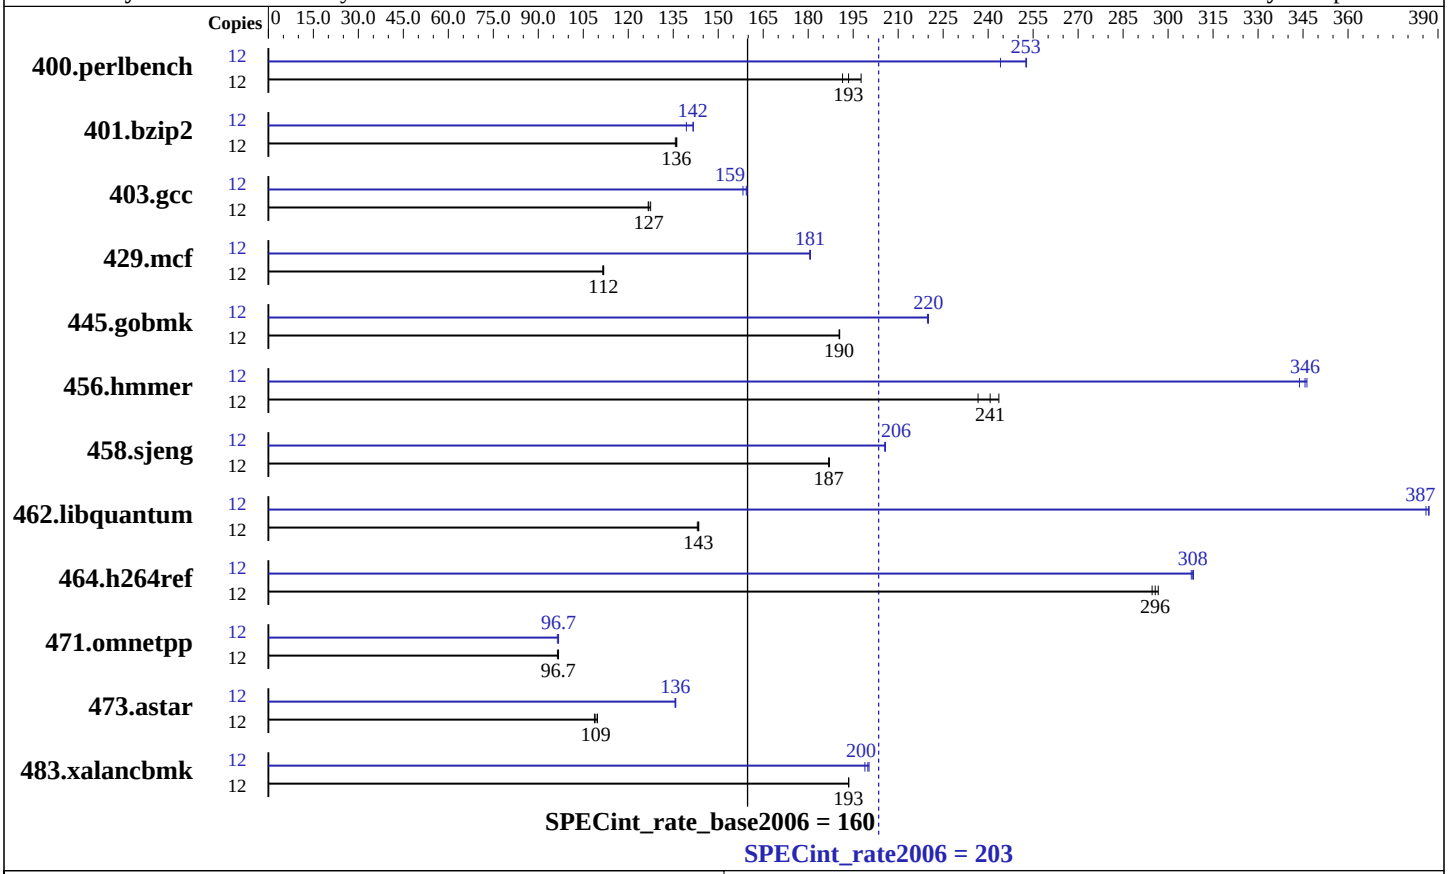

Hardware

CPU Name:	AMD Opteron 2439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1 or 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 146 GB SAS 10 K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86_64
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6240 (AMD Opteron 2439 SE 2.8GHz)

SPECint_rate2006 = 203

SPECint_rate_base2006 = 160

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Aug-2009
Hardware Availability: Oct-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	593	198	612	191	**606**	**193**	12	480	244	**464**	**253**	464	253
401.bzip2	12	**851**	**136**	853	136	850	136	12	**818**	**142**	831	139	817	142
403.gcc	12	763	127	**762**	**127**	758	127	12	610	158	605	160	**606**	**159**
429.mcf	12	982	111	**979**	**112**	979	112	12	605	181	606	181	**606**	**181**
445.gobmk	12	661	191	661	190	**661**	**190**	12	573	220	**572**	**220**	572	220
456.hmmer	12	**465**	**241**	473	237	460	244	12	326	344	323	346	**324**	**346**
458.sjeng	12	**777**	**187**	777	187	776	187	12	706	206	**706**	**206**	707	206
462.libquantum	12	1733	144	**1734**	**143**	1738	143	12	**643**	**387**	642	387	644	386
464.h264ref	12	895	297	**898**	**296**	901	295	12	861	308	**862**	**308**	863	308
471.omnetpp	12	775	96.8	**775**	**96.7**	778	96.4	12	775	96.8	778	96.3	**775**	**96.7**
473.astar	12	**771**	**109**	768	110	775	109	12	620	136	**621**	**136**	621	136
483.xalancbmk	12	428	193	428	193	**428**	**193**	12	416	199	**414**	**200**	413	200

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
   Default BIOS settings used except:
   DCT Unganged Mode set to "Always" to enable Unganged Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/data1/SPECcpu2006v1.1/amd0905is-libs/64:/data1/SPECcpu2006v1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-OPT:alias=disjoint -WOPT:if_conv=0 -m32
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/amd-platform.20090710.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:08:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 September 2009.