



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55


Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

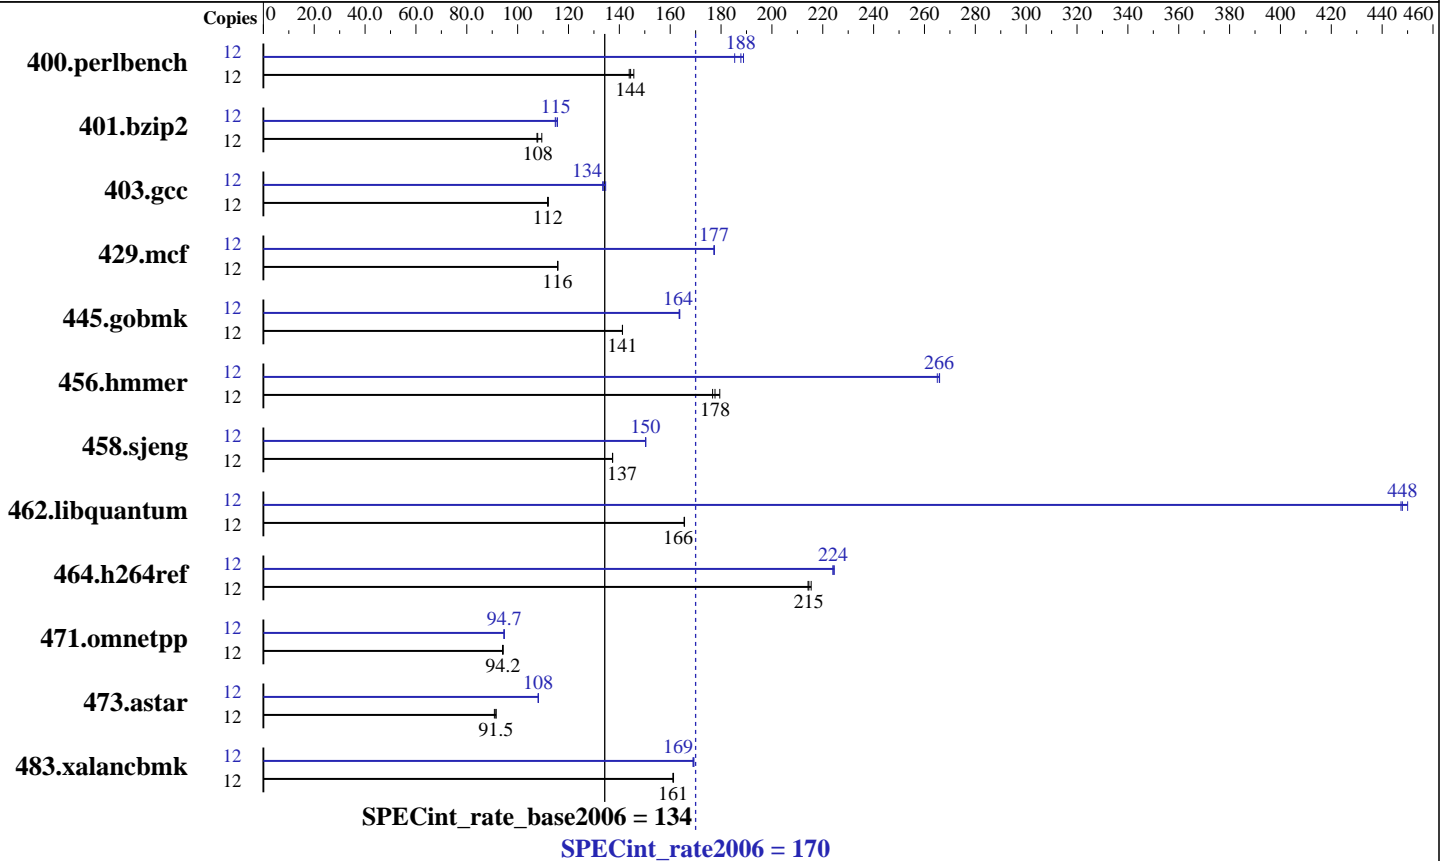

Hardware

CPU Name: AMD Opteron 2423 HE
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0
 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	805	146	815	144	812	144	12	633	185	621	189	624	188
401.bzip2	12	1057	110	1076	108	1073	108	12	1009	115	1001	116	1006	115
403.gcc	12	864	112	862	112	864	112	12	718	135	723	134	724	133
429.mcf	12	946	116	945	116	946	116	12	617	177	617	177	618	177
445.gobmk	12	891	141	891	141	891	141	12	769	164	769	164	770	164
456.hammer	12	630	178	624	179	634	177	12	422	265	421	266	421	266
458.sjeng	12	1057	137	1058	137	1057	137	12	966	150	966	150	965	150
462.libquantum	12	1502	166	1501	166	1502	166	12	556	447	553	450	555	448
464.h264ref	12	1240	214	1233	215	1238	215	12	1186	224	1183	225	1185	224
471.omnetpp	12	797	94.1	796	94.3	796	94.2	12	793	94.6	792	94.7	792	94.7
473.astar	12	921	91.5	927	90.8	921	91.5	12	779	108	779	108	779	108
483.xalancbmk	12	514	161	514	161	513	161	12	490	169	489	169	490	169

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmcr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmcr: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
           -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
           -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
           -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
           -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
 -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
 -CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
 -HP:bdt=2m:heap=2m -OPT:alias=disjoint
 -INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
 -OPT:alias=disjoint -WOPT:if_conv=0 -m32
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
 -Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
 -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html
<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>
<http://www.spec.org/cpu2006/flags/amd-platform.20090914.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 170

PowerEdge M805 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate_base2006 = 134

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml
- <http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>
- <http://www.spec.org/cpu2006/flags/amd-platform.20090914.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:41:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2009.