SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8DMT-IBX, AMD Opteron 2439 SE

SPECint®_rate2006 = 214

SPECint_rate_base2006 = 168

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Aug-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

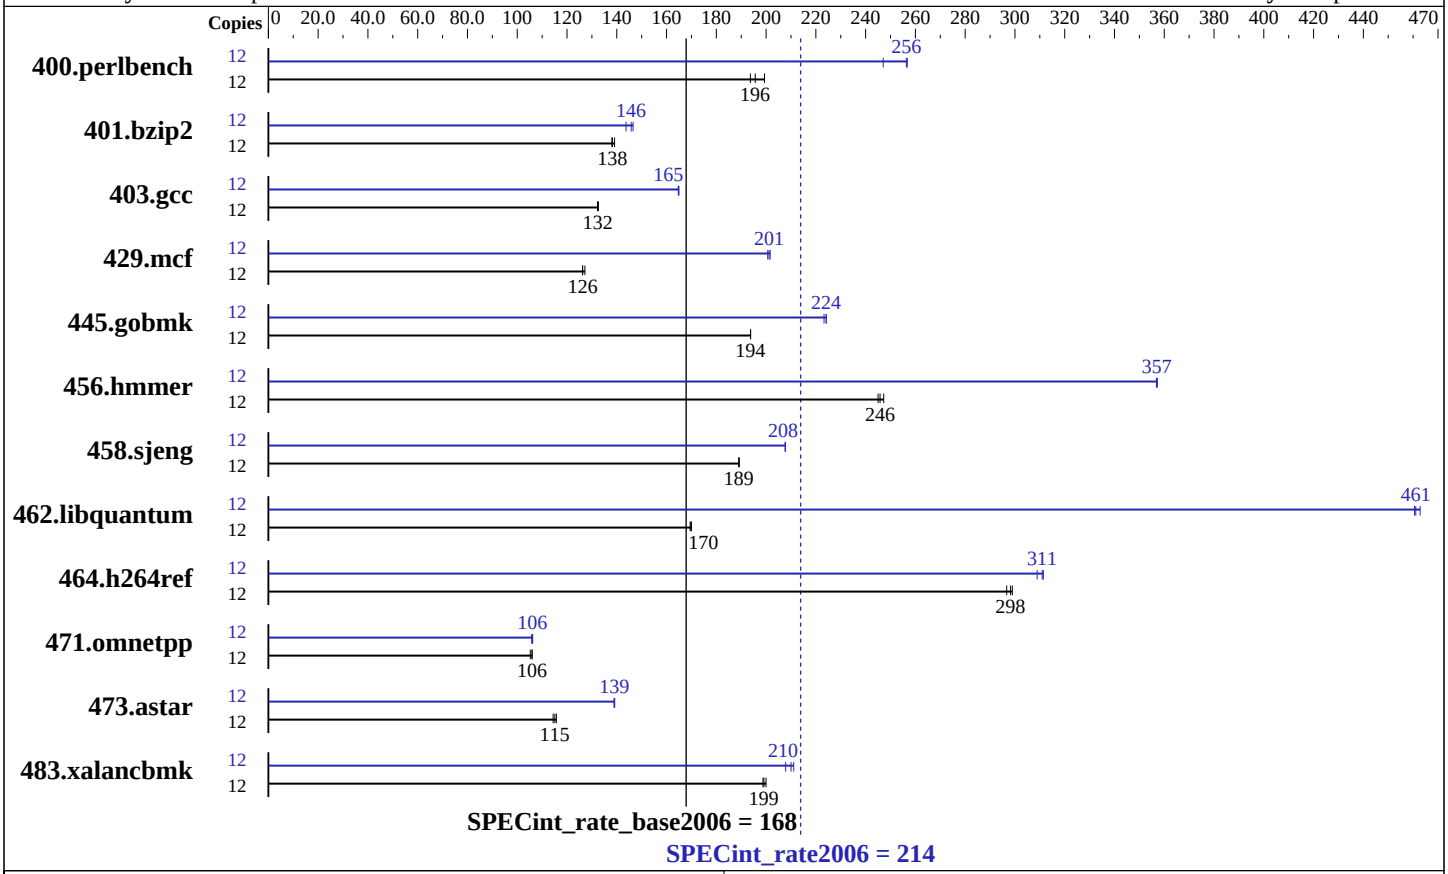

Hardware

CPU Name:	AMD Opteron 2439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 250 GB SATA, 5400 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8DMT-IBX, AMD Opteron 2439 SE

SPECint_rate2006 = 214

SPECint_rate_base2006 = 168

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Aug-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	588	199	605	194	**599**	**196**	12	475	247	**457**	**256**	457	257
401.bzip2	12	832	139	**838**	**138**	839	138	12	806	144	**794**	**146**	790	147
403.gcc	12	729	133	**729**	**132**	730	132	12	586	165	**586**	**165**	586	165
429.mcf	12	860	127	867	126	**866**	**126**	12	**544**	**201**	545	201	543	202
445.gobmk	12	650	194	**650**	**194**	650	194	12	564	223	**562**	**224**	562	224
456.hmmer	12	457	245	453	247	**456**	**246**	12	314	357	313	357	**314**	**357**
458.sjeng	12	**768**	**189**	768	189	768	189	12	**699**	**208**	699	208	699	208
462.libquantum	12	**1464**	**170**	1467	169	1463	170	12	537	463	**539**	**461**	540	461
464.h264ref	12	888	299	**890**	**298**	895	297	12	860	309	853	311	**854**	**311**
471.omnetpp	12	708	106	**708**	**106**	713	105	12	706	106	**706**	**106**	709	106
473.astar	12	728	116	736	114	**732**	**115**	12	607	139	**606**	**139**	605	139
483.xalancbmk	12	414	200	417	199	**416**	**199**	12	398	208	392	211	**394**	**210**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/usr/cpu2006/amd0905is-libs/64:/usr/cpu2006/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

System can be built with CSE-808-780/809T-780.

Product description can be obtained at:
http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMT-IBX.cfm
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`
`-HP:bdt=2m:heap=2m`

462.libquantum: `-march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off`
`-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0`
`-HP:bdt=2m:heap=2m -OPT:alias=disjoint`
`-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000`

464.h264ref: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `-march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on`
`-OPT:alias=disjoint -WOPT:if_conv=0 -m32`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2)
`-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge`
`-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32`
`-Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

456.hmmer: `-Mipa=jobs:4`

C++ benchmarks:

473.astar: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd-platform.20090710.html`
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html`
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html`

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml
```


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:49:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 September 2009.