SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M3 (Intel Xeon X3470)

SPECint®_rate2006 = 123

SPECint_rate_base2006 = 114

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2009
Hardware Availability: Oct-2009
Software Availability: Feb-2009

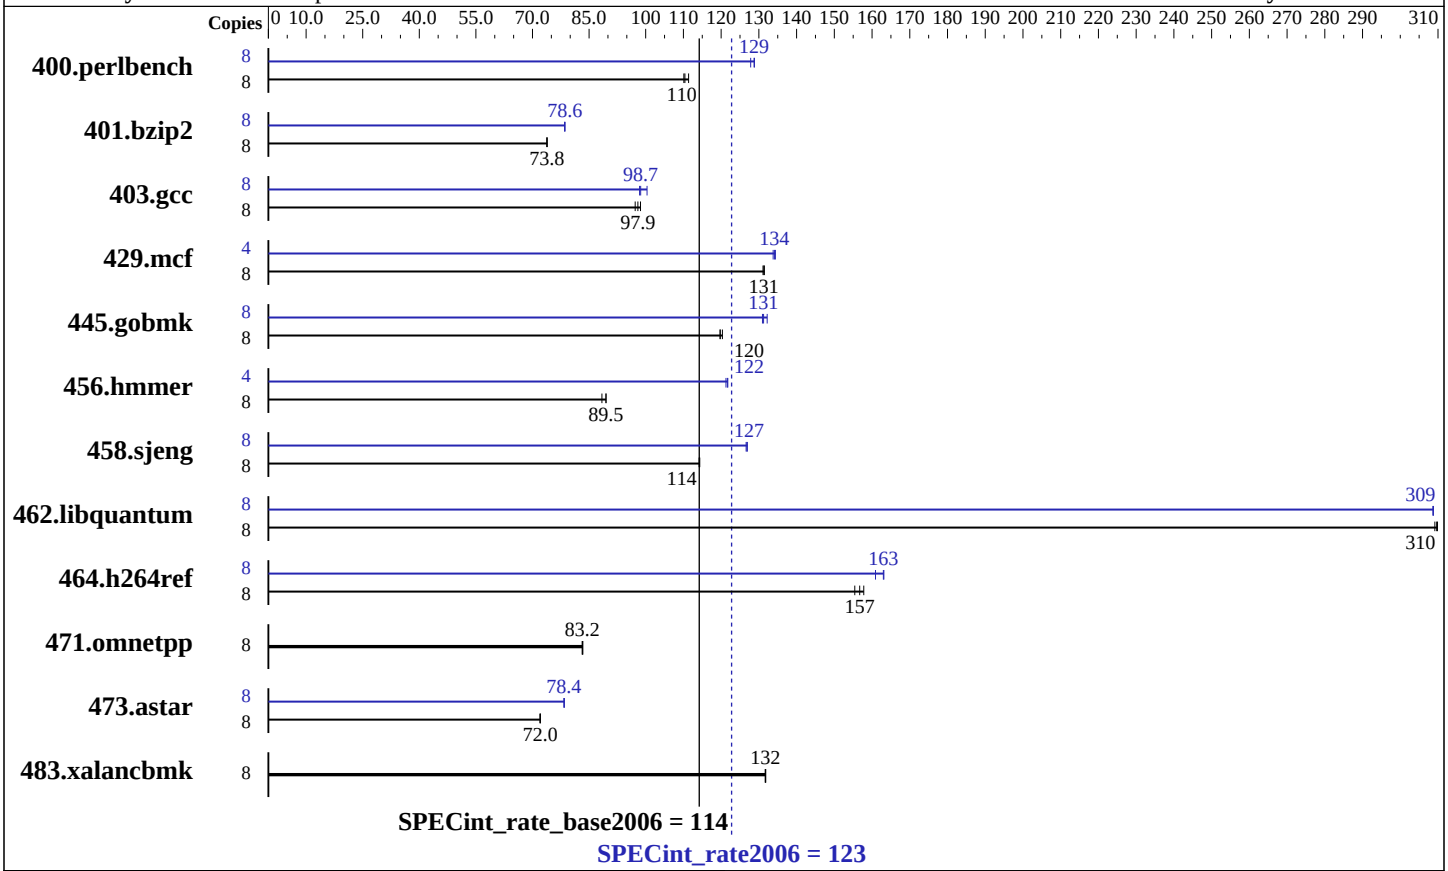

Hardware

CPU Name:	Intel Xeon X3470
CPU Characteristics:	Intel Turbo Boost Technology up to 3.6 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB(4 x 4 GB PC3-10600R)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 11(x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3250 M3 (Intel Xeon X3470)

SPECint_rate2006 = 123

SPECint_rate_base2006 = 114

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2009
Hardware Availability: Oct-2009
Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	702	111	**708**	**110**	710	110	8	607	129	611	128	**607**	**129**
401.bzip2	8	**1046**	**73.8**	1046	73.8	1045	73.9	8	**982**	**78.6**	982	78.6	983	78.5
403.gcc	8	653	98.6	662	97.2	**658**	**97.9**	8	**653**	**98.7**	642	100	655	98.4
429.mcf	8	555	131	**556**	**131**	557	131	4	273	134	**272**	**134**	271	134
445.gobmk	8	697	120	**701**	**120**	701	120	8	**639**	**131**	641	131	635	132
456.hmmer	8	**834**	**89.5**	834	89.5	844	88.4	4	308	121	**307**	**122**	306	122
458.sjeng	8	847	114	848	114	**847**	**114**	8	763	127	764	127	**763**	**127**
462.libquantum	8	**535**	**310**	535	310	536	309	8	537	309	537	309	**537**	**309**
464.h264ref	8	1139	155	1122	158	**1130**	**157**	8	1085	163	1100	161	**1086**	**163**
471.omnetpp	8	601	83.2	600	83.4	**601**	**83.2**	8	601	83.2	600	83.4	**601**	**83.2**
473.astar	8	779	72.1	780	72.0	**779**	**72.0**	8	717	78.4	716	78.4	**716**	**78.4**
483.xalancbmk	8	419	132	419	132	**419**	**132**	8	419	132	419	132	**419**	**132**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

General Notes

```
CPU C-States Enable and Adjacent Sector Prefetch Enable
Turbo Mode Enable
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

458.sjeng: `/opt/intel/Compiler/11.0/080/bin/intel64/icc`

C++ benchmarks (except as noted below):
`icpc`

473.astar: `/opt/intel/Compiler/11.0/080/bin/intel64/icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091002.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20091002.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Sep 23 18:32:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 October 2009.