



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp<sup>®</sup>\_rate2006 = 139

### PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

### SPECfp\_rate\_base2006 = 133

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

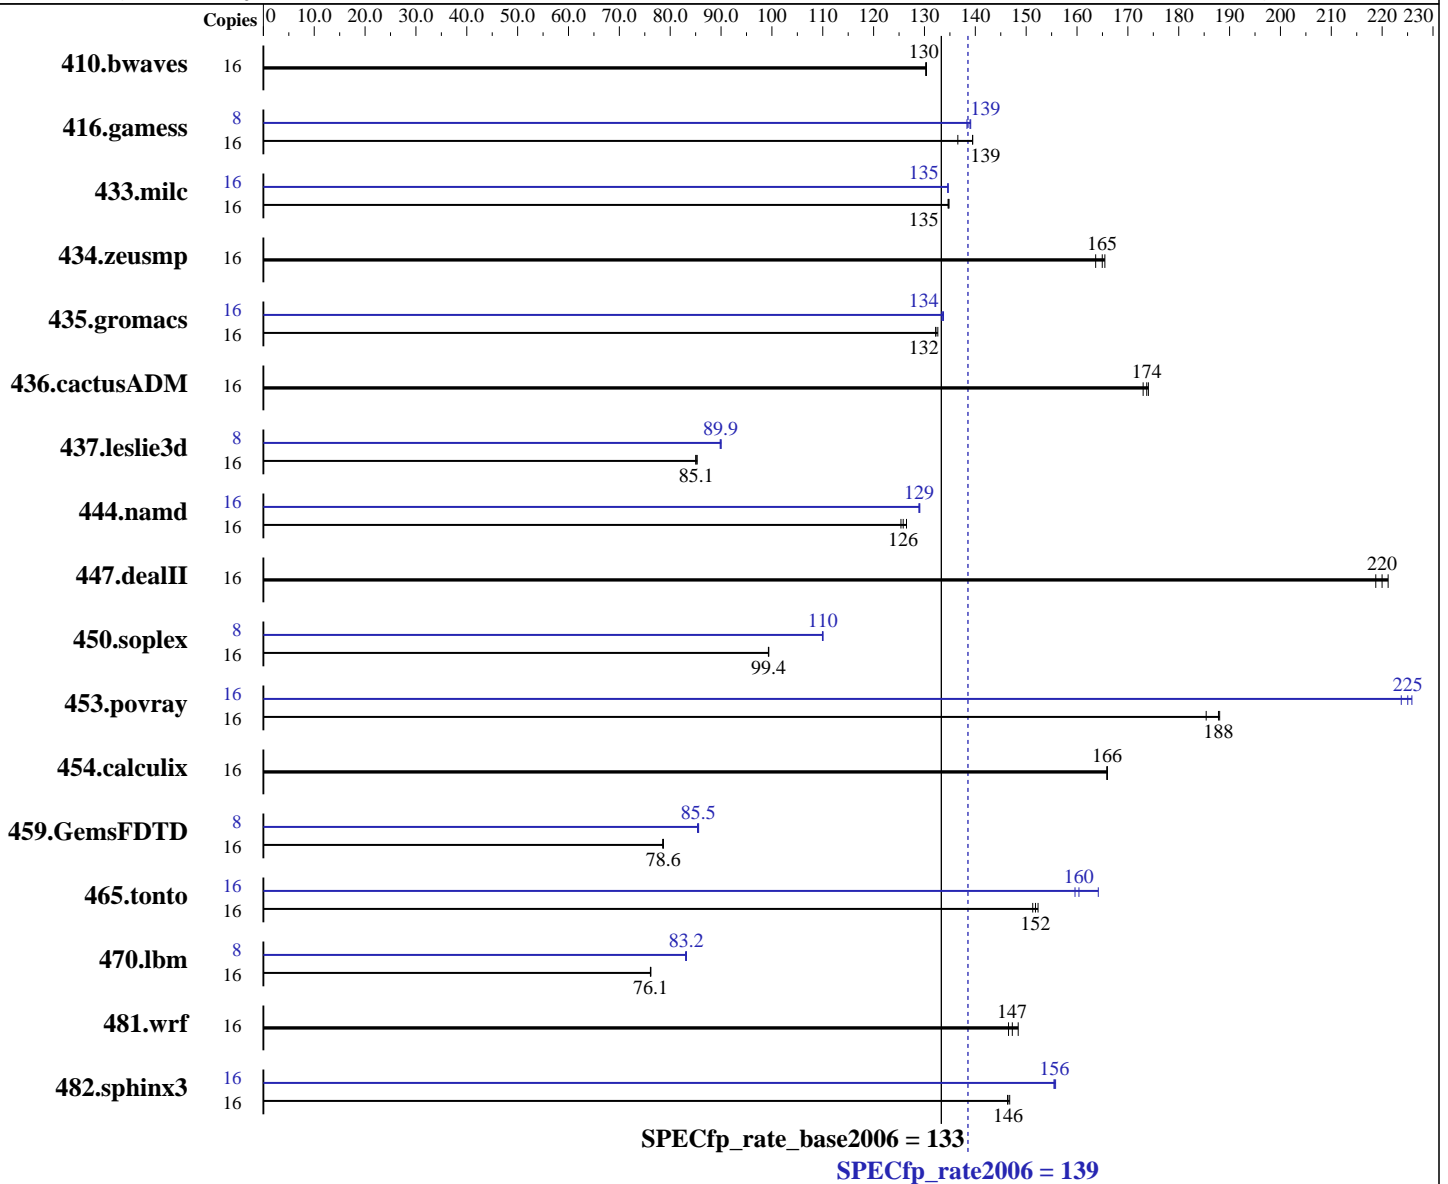

#### Hardware

CPU Name: Intel Xeon L5630  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 2133  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **139**

PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

SPECfp\_rate\_base2006 = **133**

CPU2006 license: 19

Test date: Apr-2010

Test sponsor: Fujitsu

Hardware Availability: May-2010

Tested by: Fujitsu

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)  
 Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>1669</b>	<b>130</b>	1667	130	1669	130	16	<b>1669</b>	<b>130</b>	1667	130	1669	130
416.gamess	16	<b>2246</b>	<b>139</b>	2294	137	2246	139	8	<b>1127</b>	<b>139</b>	1132	138	1126	139
433.milc	16	1089	135	<b>1090</b>	<b>135</b>	1091	135	16	1091	135	1091	135	<b>1091</b>	<b>135</b>
434.zeusmp	16	880	165	<b>883</b>	<b>165</b>	890	164	16	880	165	<b>883</b>	<b>165</b>	890	164
435.gromacs	16	861	133	<b>864</b>	<b>132</b>	864	132	16	<b>855</b>	<b>134</b>	854	134	856	133
436.cactusADM	16	1099	174	<b>1101</b>	<b>174</b>	1105	173	16	1099	174	<b>1101</b>	<b>174</b>	1105	173
437.leslie3d	16	<b>1767</b>	<b>85.1</b>	1763	85.3	1769	85.0	8	835	90.0	837	89.8	<b>836</b>	<b>89.9</b>
444.namd	16	1015	126	1023	125	<b>1020</b>	<b>126</b>	16	995	129	994	129	<b>995</b>	<b>129</b>
447.dealII	16	828	221	<b>832</b>	<b>220</b>	837	219	16	828	221	<b>832</b>	<b>220</b>	837	219
450.soplex	16	1343	99.4	1344	99.3	<b>1343</b>	<b>99.4</b>	8	<b>607</b>	<b>110</b>	607	110	606	110
453.povray	16	459	185	453	188	<b>453</b>	<b>188</b>	16	<b>378</b>	<b>225</b>	377	226	380	224
454.calculix	16	<b>795</b>	<b>166</b>	795	166	796	166	16	<b>795</b>	<b>166</b>	795	166	796	166
459.GemsFDTD	16	<b>2159</b>	<b>78.6</b>	2162	78.5	2158	78.7	8	992	85.6	994	85.4	<b>992</b>	<b>85.5</b>
465.tonto	16	1034	152	1041	151	<b>1037</b>	<b>152</b>	16	<b>982</b>	<b>160</b>	959	164	986	160
470.lbm	16	2885	76.2	<b>2888</b>	<b>76.1</b>	2889	76.1	8	1321	83.2	<b>1322</b>	<b>83.2</b>	1324	83.0
481.wrf	16	<b>1214</b>	<b>147</b>	1220	147	1204	148	16	<b>1214</b>	<b>147</b>	1220	147	1204	148
482.sphinx3	16	<b>2130</b>	<b>146</b>	2131	146	2125	147	16	2002	156	<b>2005</b>	<b>156</b>	2006	155

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

The system automatically configures the memory to run at 1067 MHz.  
BIOS configuration:  
Data Reuse Optimization = Disable



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 139**

PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

**SPECfp\_rate\_base2006 = 133**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Apr-2010  
**Hardware Availability:** May-2010  
**Software Availability:** Jan-2010

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 139**

PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

**SPECfp\_rate\_base2006 = 133**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Apr-2010  
**Hardware Availability:** May-2010  
**Software Availability:** Jan-2010

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
  
482.sphinx3: icc -m32  
  
C++ benchmarks (except as noted below):  
icpc -m64  
  
450.soplex: icpc -m32  
  
Fortran benchmarks:  
ifort -m64  
  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 139**

PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

**SPECfp\_rate\_base2006 = 133**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 139

PRIMERGY RX200 S6, Intel Xeon L5630, 2.13 GHz

SPECfp\_rate\_base2006 = 133

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 11:22:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 20 July 2010.