



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp®2006 = 43.5

Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp\_base2006 = 40.7

CPU2006 license: 97


Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

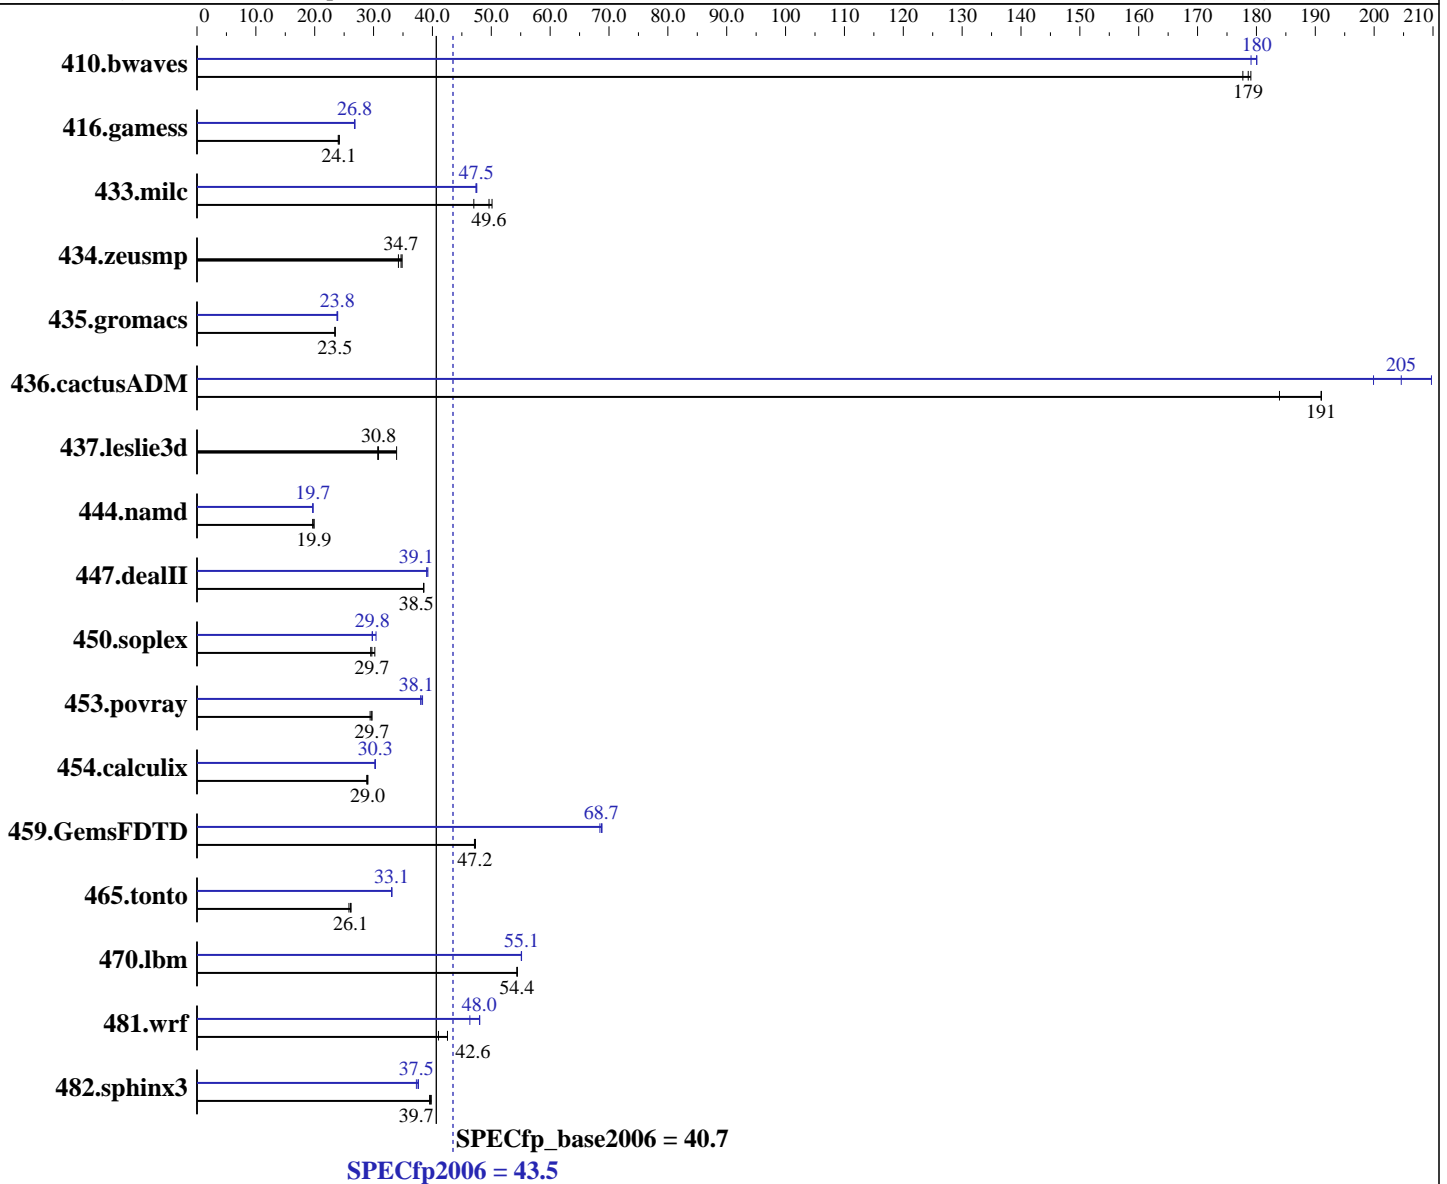

### Hardware

CPU Name: Intel Xeon X5570  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1  
 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp2006 = **43.5**

Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp\_base2006 = **40.7**

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	76.5	178	75.9	179	<b><u>76.1</u></b>	<b><u>179</u></b>	75.9	179	75.5	180	<b><u>75.5</u></b>	<b><u>180</u></b>
416.gamess	<b><u>812</u></b>	<b><u>24.1</u></b>	816	24.0	810	24.2	732	26.8	<b><u>731</u></b>	<b><u>26.8</u></b>	730	26.8
433.milc	183	50.1	<b><u>185</u></b>	<b><u>49.6</u></b>	195	47.0	193	47.5	<b><u>193</u></b>	<b><u>47.5</u></b>	194	47.4
434.zeusmp	261	34.9	<b><u>262</u></b>	<b><u>34.7</u></b>	266	34.2	261	34.9	<b><u>262</u></b>	<b><u>34.7</u></b>	266	34.2
435.gromacs	<b><u>304</u></b>	<b><u>23.5</u></b>	304	23.5	305	23.4	<b><u>299</u></b>	<b><u>23.8</u></b>	300	23.8	299	23.9
436.cactusADM	62.5	191	<b><u>62.6</u></b>	<b><u>191</u></b>	65.0	184	59.8	200	57.0	210	<b><u>58.4</u></b>	<b><u>205</u></b>
437.leslie3d	277	33.9	306	30.7	<b><u>305</u></b>	<b><u>30.8</u></b>	277	33.9	306	30.7	<b><u>305</u></b>	<b><u>30.8</u></b>
444.namd	403	19.9	<b><u>404</u></b>	<b><u>19.9</u></b>	408	19.6	407	19.7	<b><u>407</u></b>	<b><u>19.7</u></b>	407	19.7
447.dealII	297	38.5	297	38.5	<b><u>297</u></b>	<b><u>38.5</u></b>	293	39.0	292	39.2	<b><u>293</u></b>	<b><u>39.1</u></b>
450.soplex	<b><u>281</u></b>	<b><u>29.7</u></b>	283	29.5	276	30.2	<b><u>280</u></b>	<b><u>29.8</u></b>	280	29.8	274	30.4
453.povray	179	29.7	181	29.4	<b><u>179</u></b>	<b><u>29.7</u></b>	140	38.0	<b><u>140</u></b>	<b><u>38.1</u></b>	139	38.3
454.calculix	286	28.8	284	29.0	<b><u>285</u></b>	<b><u>29.0</u></b>	<b><u>272</u></b>	<b><u>30.3</u></b>	272	30.3	273	30.2
459.GemsFDTD	225	47.1	<b><u>225</u></b>	<b><u>47.2</u></b>	224	47.3	154	68.8	<b><u>154</u></b>	<b><u>68.7</u></b>	155	68.5
465.tonto	381	25.8	<b><u>377</u></b>	<b><u>26.1</u></b>	376	26.2	297	33.1	298	33.1	<b><u>297</u></b>	<b><u>33.1</u></b>
470.lbm	253	54.4	252	54.4	<b><u>253</u></b>	<b><u>54.4</u></b>	249	55.1	249	55.1	<b><u>249</u></b>	<b><u>55.1</u></b>
481.wrf	272	41.0	<b><u>262</u></b>	<b><u>42.6</u></b>	262	42.6	241	46.4	233	48.0	<b><u>233</u></b>	<b><u>48.0</u></b>
482.sphinx3	490	39.8	493	39.5	<b><u>491</u></b>	<b><u>39.7</u></b>	523	37.3	518	37.6	<b><u>519</u></b>	<b><u>37.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
 OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M

## Platform Notes

Fan speed set to full Speed (ie. Enterprise Blade mode) with Smart Blade Console through CMM (Chassis Management Module)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 43.5

Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp\_base2006 = 40.7

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB2x280 F1, and Gateway GB2x280 F1 are electronically equivalent.  
This result was measured on Gateway GB2x280 F1.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 43.5

Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp\_base2006 = 40.7

CPU2006 license: 97

Test date: May-2010

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2010

Tested by: Acer Incorporated

Software Availability: Jan-2010

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `-xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2`

C++ benchmarks:

444.namd: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp2006 = 43.5**

**Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)**

**SPECfp\_base2006 = 40.7**

**CPU2006 license:** 97

**Test date:** May-2010

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Sep-2010

**Tested by:** Acer Incorporated

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**      **SPECfp2006 = 43.5**

**Acer AB2x280 F1 (Intel Xeon X5570, 2.93 GHz)**      **SPECfp\_base2006 = 40.7**

<b>CPU2006 license:</b> 97	<b>Test date:</b> May-2010
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Sep-2010
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Jan-2010

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 10:53:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 August 2010.