



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120b-1
(Intel Xeon E5503)

SPECint_rate2006 = 79.2

SPECint_rate_base2006 = 73.0

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

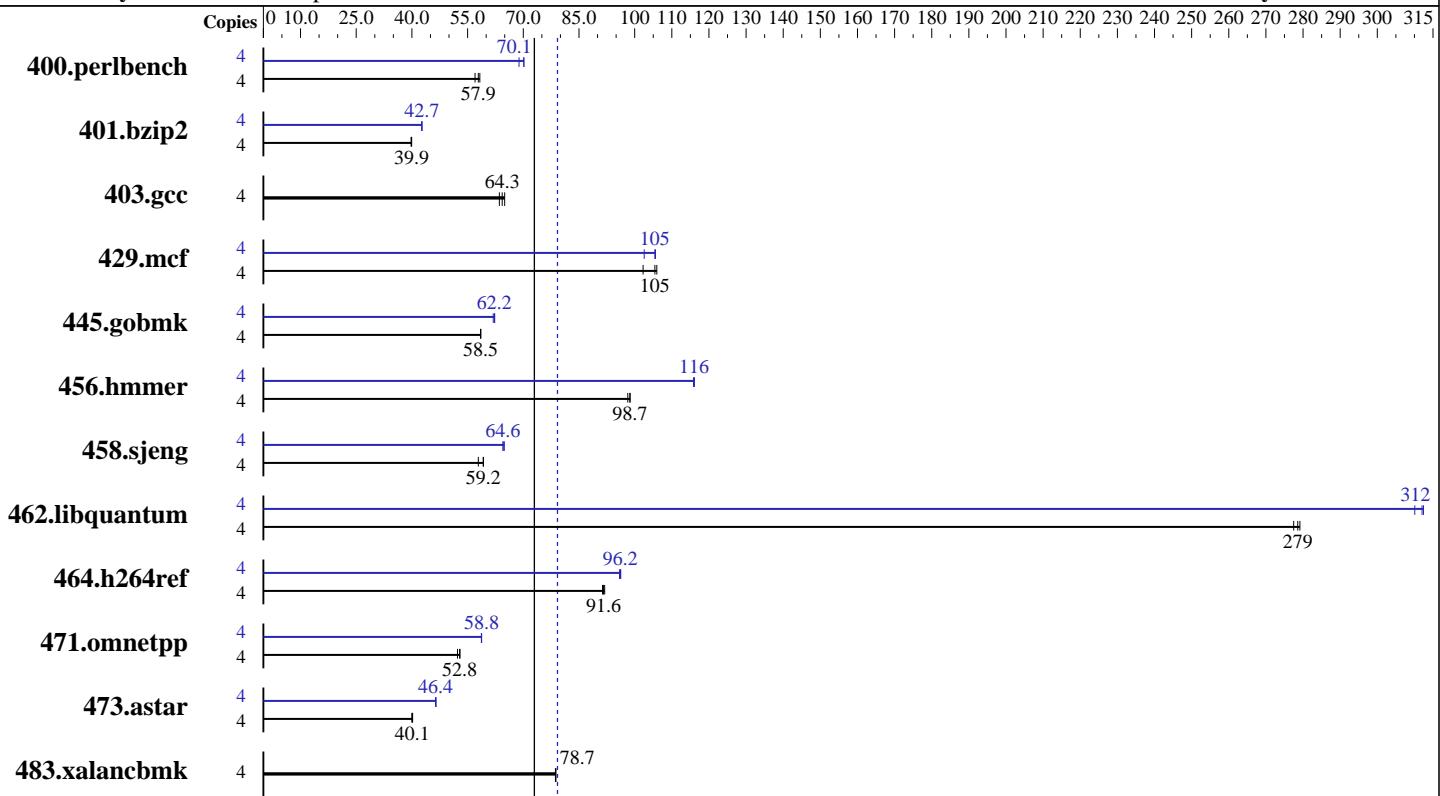

Hardware		Software	
CPU Name:	Intel Xeon E5503	Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
CPU Characteristics:		Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
CPU MHz:	2000	Auto Parallel:	No
FPU:	Integrated	File System:	ext3
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Other Software:	Microquill SmartHeap V8.1
L3 Cache:	4 MB I+D on chip per chip		
Other Cache:	None		
Memory:	48 GB (12 x 4 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)		
Disk Subsystem:	1x250 GB SATA, 7200 RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120b-1
(Intel Xeon E5503)

SPECint_rate2006 = 79.2

SPECint_rate_base2006 = 73.0

CPU2006 license: 9006

Test date: Jul-2010

Test sponsor: NEC Corporation

Hardware Availability: Sep-2010

Tested by: NEC Corporation

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	670	58.3	686	57.0	675	57.9	4	557	70.2	557	70.1	568	68.9
401.bzip2	4	967	39.9	968	39.9	970	39.8	4	905	42.7	904	42.7	904	42.7
403.gcc	4	501	64.3	496	65.0	507	63.6	4	501	64.3	496	65.0	507	63.6
429.mcf	4	357	102	344	106	346	105	4	356	103	345	106	346	105
445.gobmk	4	717	58.6	717	58.5	717	58.5	4	678	61.9	674	62.2	673	62.3
456.hammer	4	378	98.8	378	98.7	380	98.1	4	322	116	321	116	322	116
458.sjeng	4	818	59.2	836	57.9	816	59.3	4	750	64.6	750	64.5	746	64.9
462.libquantum	4	299	277	297	279	298	279	4	265	312	267	310	266	312
464.h264ref	4	969	91.3	963	91.9	966	91.6	4	923	95.9	920	96.2	920	96.2
471.omnetpp	4	472	53.0	478	52.3	473	52.8	4	426	58.7	425	58.8	425	58.8
473.astar	4	700	40.1	702	40.0	699	40.2	4	605	46.4	605	46.4	604	46.5
483.xalancbmk	4	351	78.7	350	78.8	351	78.7	4	351	78.7	350	78.8	351	78.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.

General Notes

The Express5800/R120b-1 and
the Express5800/R120b-2 models are electronically equivalent.
The results have been measured on the Express5800/R120b-2 model.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120b-1
(Intel Xeon E5503)

SPECint_rate2006 = 79.2

SPECint_rate_base2006 = 73.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120b-1
(Intel Xeon E5503)

SPECint_rate2006 = 79.2

SPECint_rate_base2006 = 73.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

Peak Portability Flags (Continued)

```
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/opt/SmartHeap_8.1/lib -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120b-1
(Intel Xeon E5503)

SPECint_rate2006 = 79.2

SPECint_rate_base2006 = 73.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

473.astar (continued):

-L/opt/SmartHeap_8.1/lib64 -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100721.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 13:39:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 August 2010.